74ABT244 Octal buffer/line driver; 3-state Rev. 3 — 6 October 2017

Product data sheet

1 **General description**

The 74ABT244 high-performance BiCMOS device combines low static and dynamic power dissipation with high speed and high output drive.

The 74ABT244 device is an octal buffer that is ideal for driving bus lines. The device features two output enables (1OE and 2OE), each controlling four of the 3-state outputs.

Features and benefits

- Octal bus interface
- · 3-State buffers
- Output capability: +64 mA/–32 mA
- Power-up 3-State
- · Live insertion capability
- Inputs are disabled during 3-state mode
- Latch-up protection exceeds 500 mA per JESD78 class II level A
- ESD protection:
 - HBM JESD22-A114F exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
- Specified from -40 °C to +85 °C

Ordering information


Table 1. Ordering information

Type number	number Package								
	Temperature range	Name	Description	Version					
74ABT244D	-40 °C to +85 °C	SO20	plastic small outline package; 20 leads; body width 7.5 mm	SOT163-1					
74ABT244DB	-40 °C to +85 °C	SSOP20	plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1					
74ABT244PW	-40 °C to +85 °C	TSSOP20	plastic thin shrink small outline package; 20 leads; body width 4.4 mm	SOT360-1					



Octal buffer/line driver; 3-state


4 Functional diagram

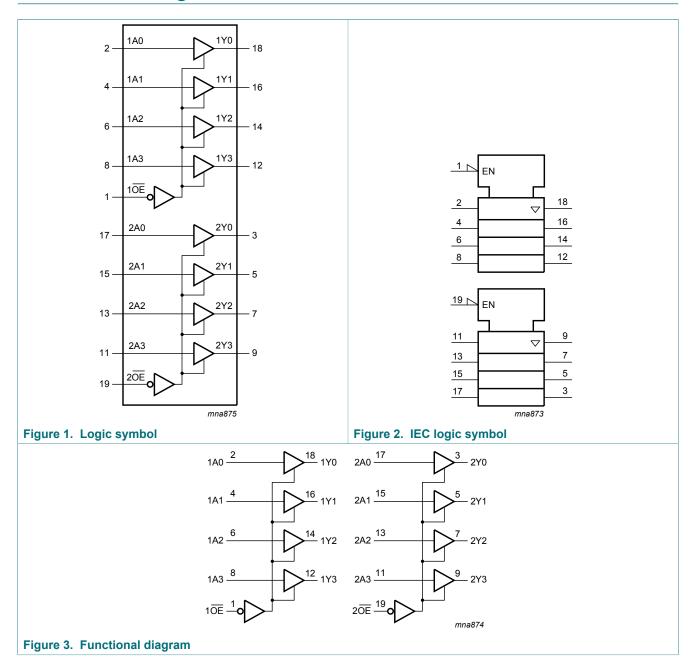

Octal buffer/line driver; 3-state

5 Pinning information

5.1 Pinning

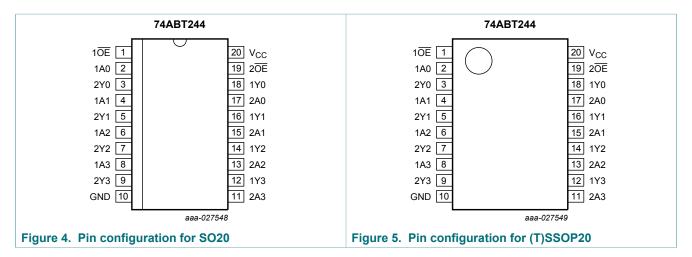

5.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
1A0, 1A1, 1A2, 1A3	2, 4, 6, 8	data input
1Y0, 1Y1, 1Y2, 1Y3	18, 16, 14, 12	data output
2A0, 2A1, 2A2, 2A3	17, 15, 13, 11	data input
2Y0, 2Y1, 2Y2, 2Y3	3, 5, 7, 9	data output
1OE, 2OE	1, 19	output enable input (active LOW)
GND	10	ground (0 V)
V _{CC}	20	supply voltage

6 Functional description

Table 3. Function table [1]

Input nOE nAn		Output
nŌE	nAn	nYn
L	L	L
L	Н	Н
Н	X	Z

^[1] H = HIGH voltage level;

74ABT244

L = LOW voltage level;

X = don't care;

Z = high-impedance OFF-state.

Octal buffer/line driver; 3-state

Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V _{CC}	supply voltage			-0.5	+7.0	V
VI	input voltage		[1]	-1.2	+7.0	V
Vo	output voltage	output in OFF-state or HIGH-state	[1]	-0.5	+5.5	V
I _{IK}	input clamping current	V _I < 0 V		-18	-	mA
I _{OK}	output clamping current	V _O < 0 V		-50	-	mA
Io	output current	output in LOW-state		-	128	mA
Tj	junction temperature		[2]	-	150	°C
T _{stg}	storage temperature			-65	+150	°C

Recommended operating conditions 8

Table 5. Operating conditions

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V_{CC}	supply voltage		4.5	-	5.5	V
VI	input voltage		0	-	V _{CC}	V
I _{OH}	HIGH-level output current		-32	-	-	mA
I _{OL}	LOW-level output current		-	-	64	mA
Δt/ΔV	input transition rise and fall rate		0	-	5	ns/V
T _{amb}	ambient temperature	in free air	-40	-	+85	°C

 ^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
 [2] The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150 °C.

Octal buffer/line driver; 3-state

9 Static characteristics

Table 6. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	T	_{amb} = 25	_{mb} = 25 °C -4		T _{amb} = -45 °C to +85 °C		
			Min	Тур	Max	Min	Max		
V_{IK}	input clamping voltage	V _{CC} = 4.5 V; I _{IK} = -18 mA	-1.2	-0.9	-	-1.2	-	V	
V _{IH}	HIGH-level input voltage		2.0	-	-	2.0	-	V	
V _{IL}	LOW-level input voltage		-	-	0.8	-	0.8	V	
V _{OH}	HIGH-level	V_{CC} = 4.5 V; V_I = V_{IL} or V_{IH}							
	output voltage	I _{OH} = -3 mA	2.5	2.9	-	2.5	-	V	
		I _{OH} = -32 mA	2.0	2.4	-	2.0	-	V	
		V_{CC} = 5.0 V; V_I = V_{IL} or V_{IH}							
		I _{OH} = -3 mA	3.0	3.4	-	3.0	-	V	
V _{OL}	LOW-level output voltage	$V_{CC} = 4.5 \text{ V}; V_I = V_{IL} \text{ or } V_{IH};$ $I_{OL} = 64 \text{ mA}$	-	0.42	0.55	-	0.55	V	
l _l	input leakage current	V _{CC} = 5.5 V; V _I = GND or 5.5 V	-	±0.01	±1.0	-	±1.0	μΑ	
I _{OFF}	power-off leakage current	V_{CC} = 0 V; V_{O} or $V_{I} \le 4.5$ V	-	±5.0	±100	-	±100	μΑ	
I _{O(pu/pd)}	power-up/ power-down output current	V_{CC} = 2.0 V; V_{O} = 0.5 V; V_{I} = GND or V_{CC} ; $n\overline{OE}$ = don't care	-	±5.0	±50	-	±50	μA	
I _{OZ}	OFF-state	V_{CC} = 5.5 V; V_I = V_{IL} or V_{IH}							
	output current	output HIGH-state at V _O = 2.7 V	-	5.0	50	-	50	μA	
		output LOW-state at $V_0 = 0.5 \text{ V}$	-	-5.0	-50	-	-50	μΑ	
I _{CEX}	output high leakage current	$V_{CC} = 5.5 \text{ V}; V_{O} = 5.5 \text{ V};$ $V_{I} = \text{GND or } V_{CC}$	-	5.0	50	-	50	μΑ	
Io	output current	$V_{CC} = 5.5 \text{ V}; V_{O} = 2.5 \text{ V}$ [2]	-40	-100	-180	-40	-180	mA	
I _{CC}	supply current	V_{CC} = 5.5 V; V_I = GND or V_{CC}							
		outputs HIGH-state	-	50	250	-	250	μA	
		outputs LOW-state	-	24	30	-	30	mA	
		outputs disabled	-	50	250	-	250	μΑ	

Octal buffer/line driver; 3-state

Symbol Parameter		Conditions	T,	T _{amb} = 25 °C		T _{amb} = -45 °C to +85 °C		Unit	
			Min	Тур	Max	Min	Max		
ΔI_{CC}	additional supply	per input pin; V _{CC} = 5.5 V							
	current	outputs enabled; one data input at 3.4 V and other inputs at V _{CC} or GND	-	0.5	1.5	-	1.5	mA	
		outputs disabled; $$^{[3]}$$ one data input at 3.4 V and other inputs at V_{CC} or GND	-	50	250	-	250	μA	
		outputs disabled; $$^{[3]}$$ one enable input at 3.4 V and other inputs at $\rm V_{CC}$ or GND	-	0.5	1.5	-	1.5	mA	
Cı	input capacitance	V _I = 0 V or V _{CC}	-	4	-	-	-	pF	
Co	output capacitance	outputs disabled; $V_O = 0 \text{ V or } V_{CC}$	-	7	-	-	-	pF	

^[1] This parameter is valid for any V_{CC} between 0 V and 2.1 V, with a transition time of up to 10 ms. From V_{CC} = 2.1 V to V_{CC} = 5 V \pm 10 % a transition time of up to 100 μs is permitted.

10 Dynamic characteristics

Table 7. Dynamic characteristics


Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8.

Symbol	mbol Parameter Con		Conditions $T_{amb} = 25 ^{\circ}\text{C}; V_{CC}$		= 5.0 V		$T_{amb} = -40 ^{\circ}\text{C to } 85 ^{\circ}\text{C};$ $V_{CC} = 5.0 \text{V} \pm 0.5 \text{V}$	
			Min	Тур	Max	Min	Max	
t _{PLH}	LOW to HIGH propagation delay	nAn to nYn; see <u>Figure 6</u>	1.0	2.6	4.1	1.0	4.6	ns
t _{PHL}	HIGH to LOW propagation delay	nAn to nYn; see <u>Figure 6</u>	1.0	2.9	4.2	1.0	4.6	ns
t _{PZH}	OFF-state to HIGH propagation delay	nOE to nYn; see Figure 7	1.1	3.1	4.6	1.1	5.1	ns
t _{PZL}	OFF-state to LOW propagation delay	nOE to nYn; see Figure 7	2.1	4.1	5.6	2.1	6.1	ns
t _{PHZ}	HIGH to OFF-state propagation delay	nOE to nYn; see Figure 7	2.1	4.1	5.6	2.1	6.6	ns
t _{PLZ}	LOW to OFF-state propagation delay	nOE to nYn; see Figure 7	1.7	2.7	5.2	1.7	5.7	ns

 ^[2] Not more than one output should be tested at a time, une time.
 [3] This is the increase in supply current for each input at 3.4 V. Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

Octal buffer/line driver; 3-state


10.1 Waveforms and test circuit

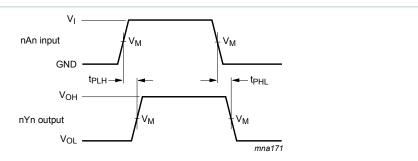

Measurement points are given in Table 8.

 V_{OL} and V_{OH} are typical voltage output levels that occur with the output load.

Figure 6. Input (nAn) to output (nYn) propagation delays

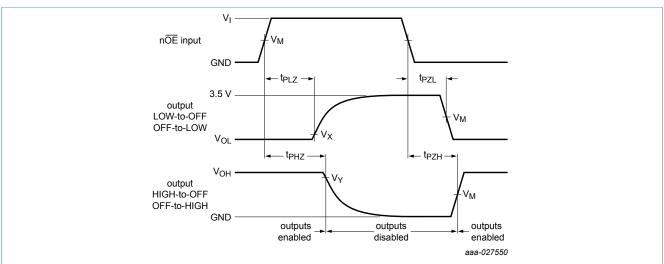

Measurement points are given in Table 8.


 V_{OL} and V_{OH} are typical voltage output levels that occur with the output load.

Figure 7. 3-state enable and disable propagation delays

Table 8. Measurement points

Input	Dutput					
V_{M}	V _M	V_X	V_{Y}			
1.5 V	1.5 V	V _{OL} + 0.3 V	V _{OH} - 0.3 V			

Octal buffer/line driver; 3-state

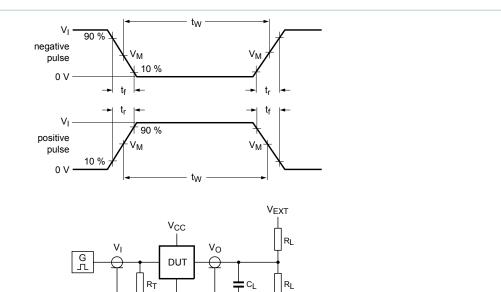

001aae331

Test data is given in Table 9.

Definitions test circuit:

R_L = Load resistance.

 C_L = Load capacitance including jig and probe capacitance.

 R_T = Termination resistance should be equal to output impedance Z_0 of the pulse generator.

 V_{EXT} = Test voltage for switching times.


Figure 8. Test circuit for measuring switching times

Table 9. Test data

Input		Load		V _{EXT}				
VI	f _i	t _W	t _r , t _f	CL	R _L	t _{PHZ} , t _{PZH}	t_{PLZ} , t_{PZL}	t _{PLH} , t _{PHL}
3.0 V	≤ 1 MHz	500 ns	≤ 2.5 ns	50 pF	500 Ω	open	7 V	open

Octal buffer/line driver; 3-state

11 Package outline

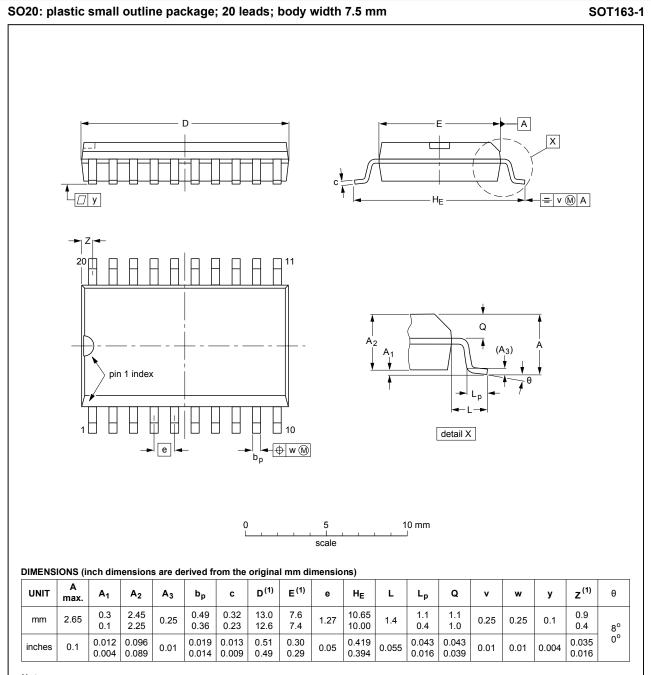

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE		EUROPEAN	ICCUE DATE				
VERSION	IEC	JEDEC	JEITA		PROJECTION ISSUE DATE		
SOT163-1	075E04	MS-013				99-12-27 03-02-19	

Figure 9. Package outline SOT163-1 (SO20)

74ABT244

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Octal buffer/line driver; 3-state

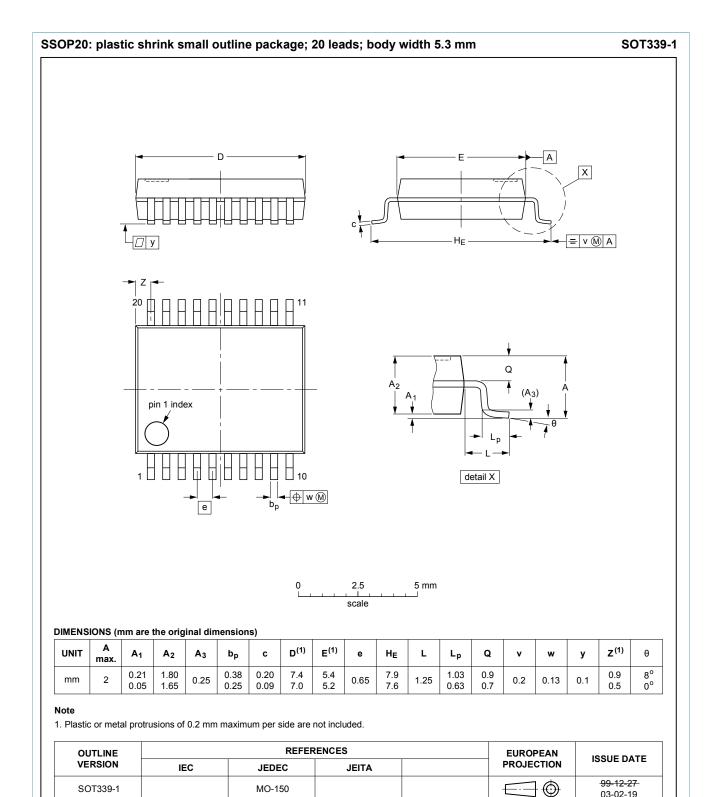


Figure 10. Package outline SOT339-1 (SSOP20)

03-02-19

Octal buffer/line driver; 3-state

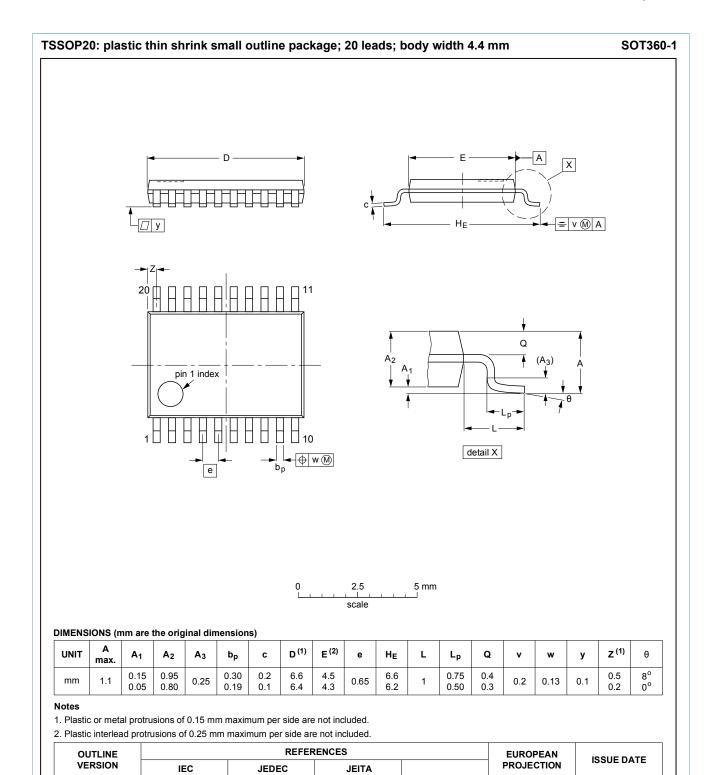


Figure 11. Package outline SOT360-1 (TSSOP20)

MO-153

99-12-27

03-02-19

 \square

SOT360-1

Octal buffer/line driver; 3-state

12 Abbreviations

Table 10. Abbreviations

Acronym	Description
BiCMOS	Bipolar Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
MIL	Military
MM	Machine Model

13 Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes			
74ABT244 v.3	20171006	Product data sheet	-	74ABT244 v.2			
Modifications:	Nexperia. • Legal texts have	 The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. Legal texts have been adapted to the new company name where appropriate. Type number 74ABT244N removed from data sheet. 					
74ABT244 v.2	19980116	Product specification	-	74ABT244 v.1			
74ABT244 v.1	19950906	Product specification	-	-			

Octal buffer/line driver; 3-state

14 Legal information

14.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- The term 'short data sheet' is explained in section "Definitions". [2] [3]
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

14.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

14.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved.

Octal buffer/line driver; 3-state

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Octal buffer/line driver; 3-state

Contents

1	General description	1
2	Features and benefits	
3	Ordering information	1
4	Functional diagram	2
5	Pinning information	
5.1	Pinning	3
5.2	Pin description	
6	Functional description	
7	Limiting values	
8	Recommended operating conditions	4
9	Static characteristics	
10	Dynamic characteristics	
10.1	Waveforms and test circuit	
11	Package outline	9
12	Abbreviations	
13	Revision history	
14	Legal information	

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.