


FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

- NOTES:
- HOUSING: SEE NOTES, TERMINAL: SEE NOTES, SHELL: SEE NOTES.
 - ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
 - MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KG) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KG) MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N 5000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE: 3~35N
 - ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55°C+85°C
4. Contact finish:
- Selective Gold Flash
 - Selective Gold 3U"
 - Selective Gold 5U"
 - Selective Gold 15U"
 - Selective Gold 30U"

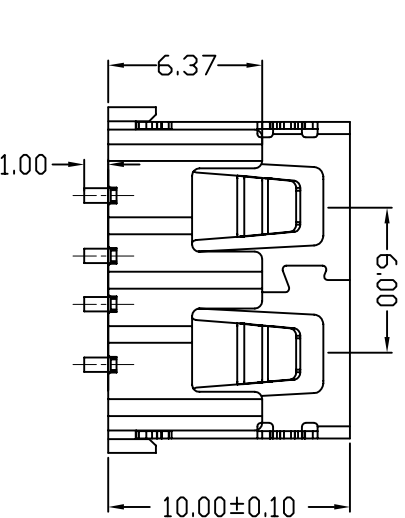

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表		单位		制图		制图料号	
TOLERANCE	UNLESS OTHERWISE	UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.	JTY-USB-10.0-003
X	±0.15	X	±5°	审核		产品名称	USB A/F 10.0无边四脚鱼叉(方弹)
X	±0.10	X	±2°	审核		PRODUCT NO.	
XX	±0.05	XX	±1°	核准		角法	
XXX	±0.03	XXX	±0.5°	核准		版本	AD
DATE	2012.09.24	DATE		APRD		VER	