
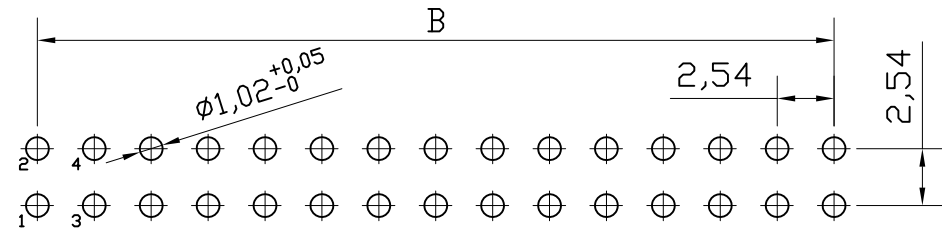
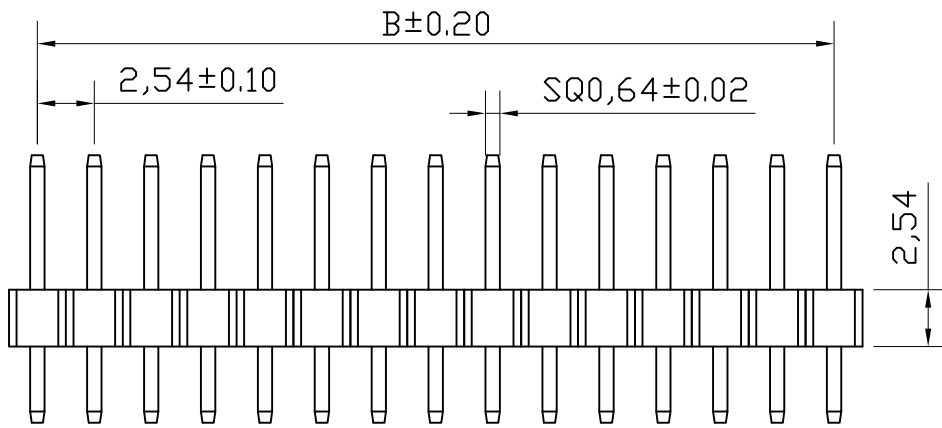


ROHS环保

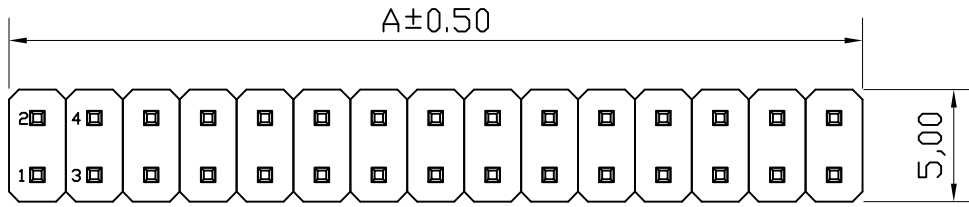

P. C. B. LAYOUT

MATERIAL

Insulator material: PBT UL94 V-0

Contact material: ALLOY

FINISH

Contact: Gold-plated over nickel


SPECIFICATIONS

Current rating: 3A

Insulator resistance: 1000MΩ min

Contact resistance: 20 mΩ max

Dielectric withstanding voltage: 500V/AC for 1min

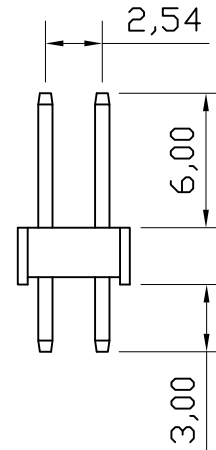

Contacts Per Row	Dimensions		Contacts Per Row	Dimensions	
	A	B		A	B
	0.00	0.00	2*21P	53.34	50.80
2*2P	5.08	2.54	2*22P	55.88	53.34
2*3P	7.62	5.08	2*23P	58.42	55.88
2*4P	10.16	7.62	2*24P	60.96	58.42
2*5P	12.70	10.16	2*25P	63.50	60.96
2*6P	15.24	12.70	2*26P	66.04	63.50
2*7P	17.78	15.24	2*27P	68.58	66.04
2*8P	20.32	17.78	2*28P	71.12	68.58
2*9P	22.86	20.32	2*29P	73.66	71.12
2*10P	25.40	22.86	2*30P	76.20	73.66
2*11P	27.94	25.40	2*31P	78.74	76.20
2*12P	30.48	27.94	2*32P	81.28	78.74
2*13P	33.02	30.48	2*33P	83.82	81.28
2*14P	35.56	33.02	2*34P	86.36	83.82
2*15P	38.10	35.56	2*35P	88.90	86.36
2*16P	40.64	38.10	2*36P	91.44	88.90
2*17P	43.18	40.64	2*37P	93.98	91.44
2*18P	45.72	43.18	2*38P	96.52	93.98
2*19P	48.26	45.72	2*39P	99.06	96.52
2*20P	50.80	48.26	2*40P	101.60	99.06

**topt** 深圳市鑫冠辉电子有限公司

一般公差 COMMONLY TOLERANCES	图号 DWG. NAME	XGH-DWG-A-114	绘图 PLOT	LXW	比例 SCALE	1:1
X. ±0.30	料号 PART NO.	PH1-H2XX-SBB-G0	审核 CHECKED	LIYAN	单位 UNIT	MM
X.X ±0.25	品名 TITLE	排针 2.54 2*NP 180度 PA6.0 PC3.0 L=11.5	核准 APPROVED		版次 REV.	A.1
X.XX ±0.20			日期 DATE	2019-03-21	页次 SHEET	1/1
X.XXX ±0.15	THIRD ANGLE PROJECTION:		日期 DATE	2019-03-21	图幅 MAPS	A4
ANGLE ±2'						

编号 DWG.NO.	标记 REV. LTR.	日期 DATE	变更内容 REVISION NOTES	签名 SIGN