



XKB SWITCH CONNECTOR

2P ON-OFF

SPECIFICATIONS

1.ELECTRICAL

● Contact rating	0.1A, 30VDC
● Contact resistance	50mWMax.
● Insulation resistance	100MWMin. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.

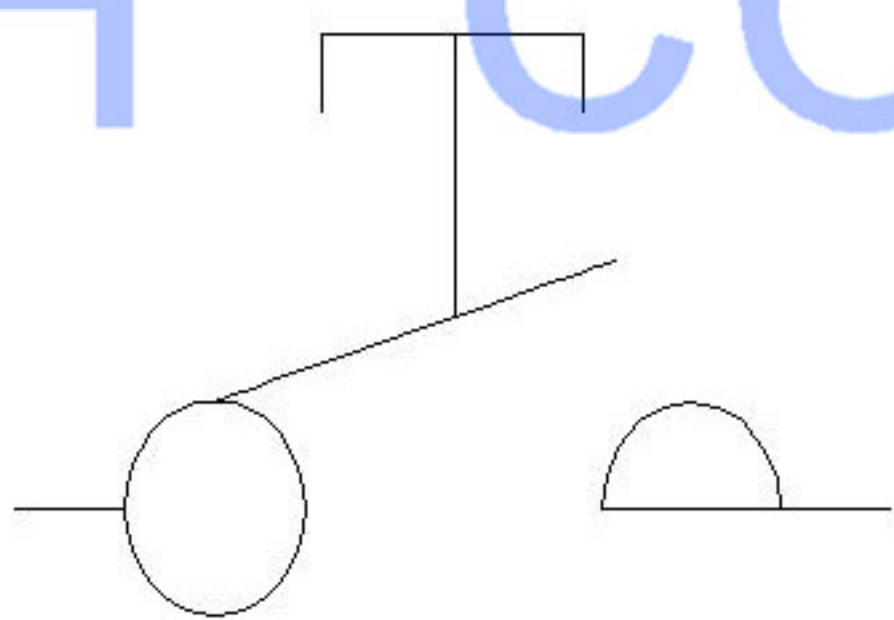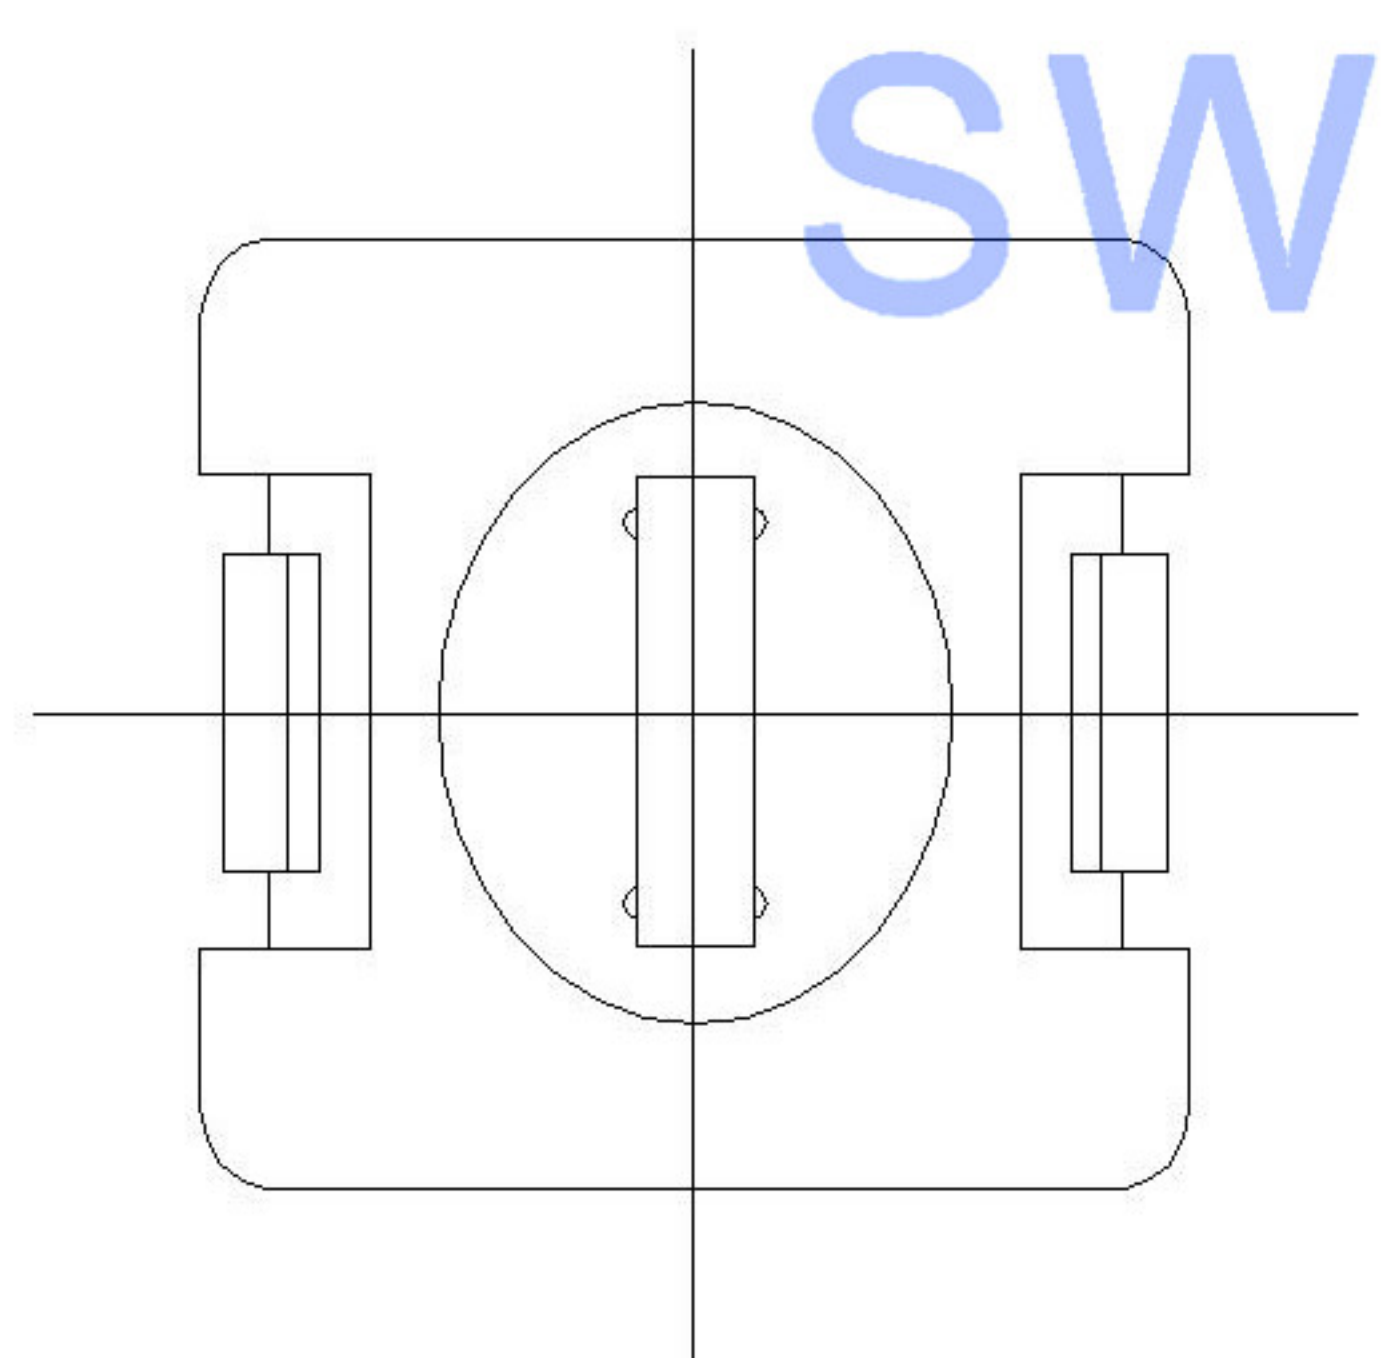

ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass	ag Plated	—
④	Contact	—	2	Phosphor Bronze	ag Plated	—
③	Base	—	1	Poly		—
②	Cover	—	1	Pa66		—
①	Keystake	—	1	Daicel		—

						DSND		DATE		SCALE: N/A	MODEL TYPE: KEY SWITCH		
ΔX					ANGLAR	DWN		DATE		VIEW:	PART NO.:		
ΔX					X.X	CHKD		DATE		UNIT: mm	DWG NO.:		
ΔX					±0.2mm	APPD		DATE		SIZE: A4	XKB11E01		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XX	XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
	REVISIONS				±0.1mm						1.0g	1/1	A0
					X.XXX								
					±0.05mm								
					UNSPECIFIED TOLERANCES								