


SPECIFICATIONS:

- Current Rating: 3AMP
- Insulator Resistance: 1000Meg ohms min
- Withstand Voltage : AC 500V
- Operating Temperature: -40° C~+85° C
- Max Processing Temp: 220° C for 3~5 seconds
- Contact Material: Brass
- Insulator Material: PBT UL94V-0 Black
- Plating: G/P Plated Over Nickel

Contacts Per Row	Dimensions		Contacts Per Row	Dimensions	
	A	B		A	B
1*2pin	5.08	2.54	1*2pin	53.34	50.80
1*3pin	7.62	5.08	1*2pin	55.88	53.34
1*4pin	10.16	7.62	1*2pin	58.42	55.88
1*5pin	12.70	10.16	1*2pin	60.96	58.42
1*6pin	15.24	12.70	1*2pin	63.50	60.96
1*7pin	17.78	15.24	1*2pin	66.04	63.50
1*8pin	20.32	17.78	1*2pin	68.58	66.04
1*9pin	22.86	20.32	1*2pin	71.12	68.58
1*10pin	25.40	22.86	1*2pin	73.66	71.12
1*11pin	27.94	25.40	1*2pin	76.20	73.66
1*12pin	30.48	27.94	1*2pin	78.74	76.20
1*13pin	33.02	30.48	1*2pin	81.28	78.74
1*14pin	35.56	33.02	1*2pin	83.82	81.28
1*15pin	38.10	35.56	1*2pin	86.36	83.82
1*16pin	40.64	38.10	1*2pin	88.90	86.36
1*17pin	43.18	40.64	1*2pin	91.44	88.90
1*18pin	45.72	43.18	1*2pin	93.98	91.44
1*19pin	48.26	45.72	1*2pin	96.52	93.98
1*20pin	50.80	48.26	1*2pin	99.06	96.52

toppt 深圳市鑫冠辉电子有限公司

P.C.B. LAYOUT

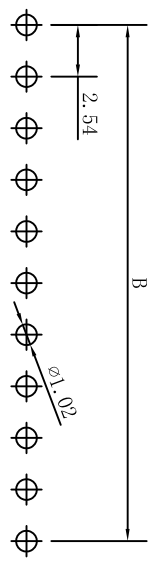

编号 DWG.NO.	标记 REV. LINK	日期 DATE	变更内容 REVISION NOTES	签名 SIGN

一般公差 COMMON TOLERANCES	图号 DWG. NAME	料号 PART NO.	品名 TITLE	日期 DATE	图幅 SIZE
X	XGH-DWG-A3276	PH1-E140-RBB-G1	PH2.54 1*40P 90度 PC3.0 L=13.8	2019-02-18	A4
X.X	±0.25				
X.XX	±0.20				
X.XXX	±0.15				
ANGLE	±2°				
比例 SCALE	绘图 FLOUT	审核 CHECKED	核次 REV.	日期 DATE	图幅 SIZE
1:1	LXW	LTYAN		2019-02-18	A4
单位 UNIT	版次 REV.	核次 REV.	核次 REV.	日期 DATE	图幅 SIZE
MM	A.0			2019-02-18	A4
1/1					

THIRD ANGLE PROJECTION

