

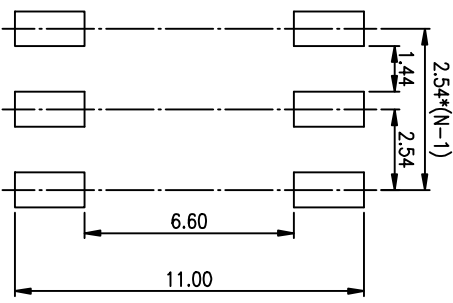
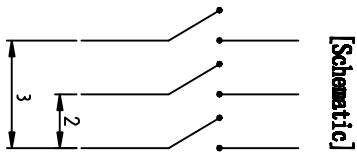
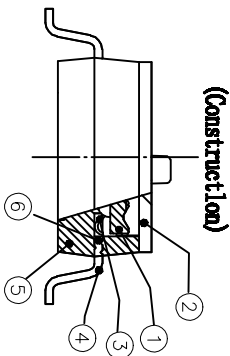

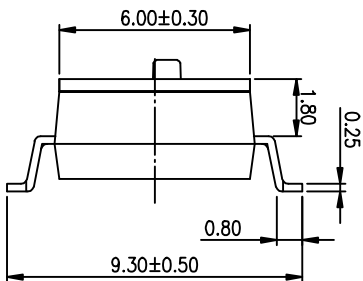


PRODUCT NO.	DISCO31SGE1
NO.	RoHS compliant

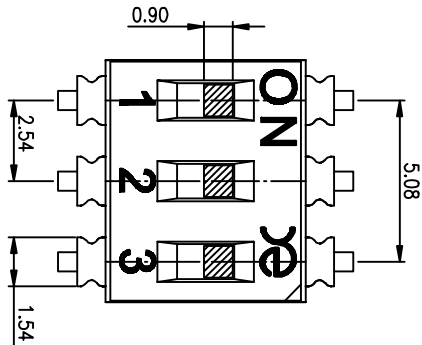

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles minimum
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

- DISC XX L S G E T
- [包装方式: T=管装 R=盒装]
 - [电镀层: B=镀锡3u" G=镀金3u" / 焊锡3u"-2u"]
 - [G=镀金 S=内金外镀]
 - [材质: S=铜 / T=铜 / A=铜 / Z=铜]
 - [T=低接触度 S=低接触度 L=长推]
 - [产品规格: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINER	ANGLES	COPY	PROJECTION
0 ± 0.25	0. ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			

FILE NO.	DISCO31SGE1-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 TOP 1 A

RE 东莞市广誉实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

TITLE
BY DISC SERIES PITCH 2.54mm

PRODUCT FAMILY DISC SERIES
PRAT NO. DISCO31SGE1