


PART NO.	NO.OF POS.	DIM.A	DIM.B	Projection (P)	Short (S)
DSIC01LH	1	2.54		DSIC01LH-P	DSIC01LH-S
DSIC02LH	2	5.08	2.54	DSIC02LH-P	DSIC02LH-S
DSIC03LH	3	7.62	5.08	DSIC03LH-P	DSIC03LH-S
DSIC04LH	4	10.16	7.62	DSIC04LH-P	DSIC04LH-S
DSIC05LH	5	12.7	10.16	DSIC05LH-P	DSIC05LH-S
DSIC06LH	6	15.24	12.70	DSIC06LH-P	DSIC06LH-S
DSIC07LH	7	17.78	15.24	DSIC07LH-P	DSIC07LH-S
DSIC08LH	8	20.32	17.78	DSIC08LH-P	DSIC08LH-S
DSIC09LH	9	22.86	20.32	DSIC09LH-P	DSIC09LH-S
DSIC10LH	10	25.4	22.86	DSIC10LH-P	DSIC10LH-S
DSIC12LH	12	30.48	27.94	DSIC12LH-P	DSIC12LH-S

SPECIFICATION
 Contact Rating: 25mA,24V DC
 Contact Resistance: 50mΩ max
 Insulation Resistance: 100mΩ min.500V DC
 Dielectric Strength: 500V AC/1minute
 Operating Force: 1,000gf max
 Travel: 1.0mm
 Operating Life: 3000cycles
 Operating Temp: -20℃~+70℃
 Storage Temp: -30℃~+80℃

SWITCH CONNECTOR

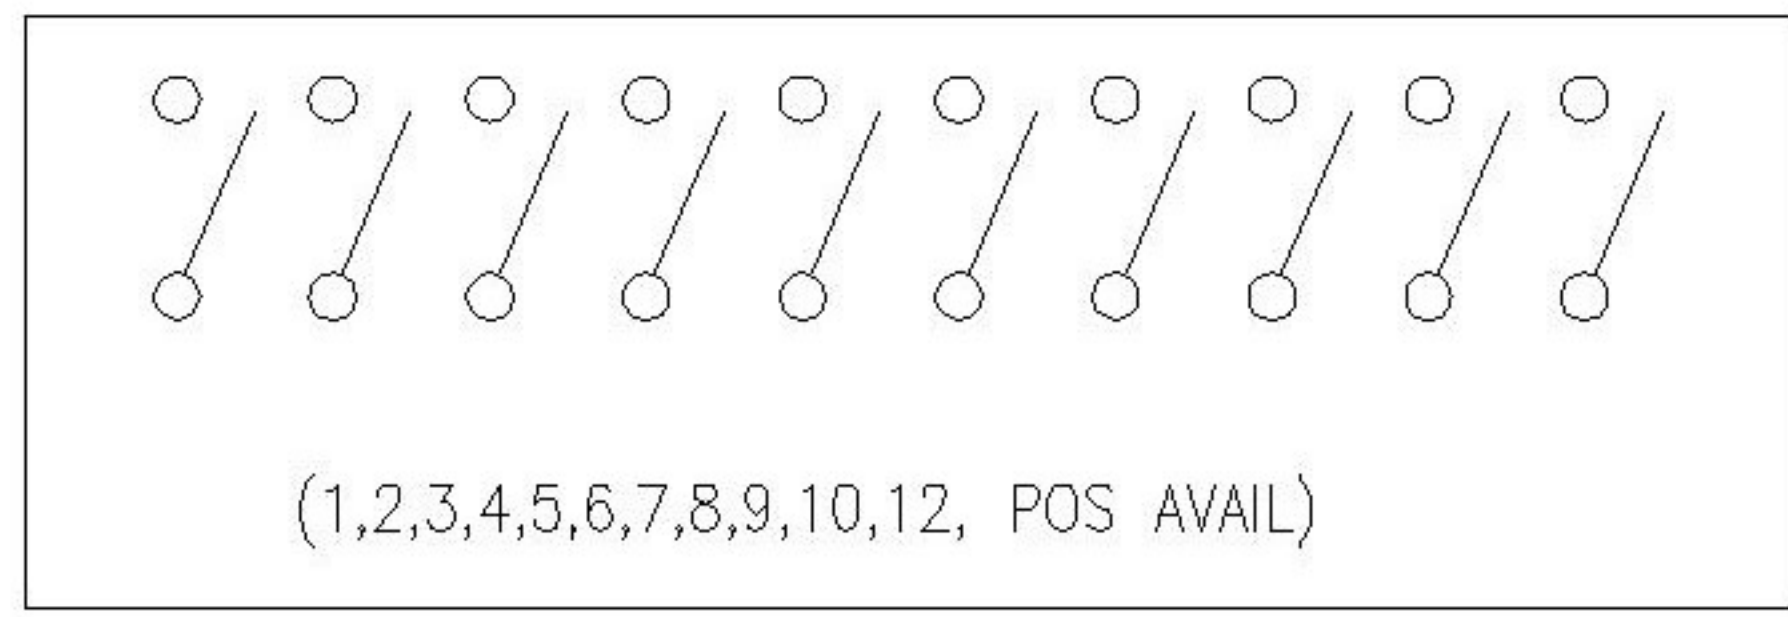

ITEM	PAPT	NAMF	QTY	MATERIAL	FINISHING
④	Terminal			Copper Alloy	T: Tin plated G:Plating Gold
③	Base		1	Pa9t	White
②	Keystake		1	Pa66	White
①	Cover		1	Pa66	Black

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△X					ANGLAR ±5°
△X					X.X ±0.2mm
△X					X.XX ±0.1mm
					X.XXX ±0.05mm

DSND	DATE	SCALE: N/A	MODEL TYPE: DIP SWITCH
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.: DSICXXLH-X
APPD	DATE	SIZE: A4	WEIGHT 1.0g
XKB INDUSTRIAL PRECISION CO.,LIMITED			SHEET 1/1
			REVISION A0