


P. C. B. LAYOUT

SPECIFICATIONS:
 Current Rating: 3AMP
 Insulator Resistance: 1000Megaohms min
 Voltage Rating: AC 500V
 Operating Temperature: -40° ~+105°
 Max Processing Temp: 220° for 3~5 seconds
 Contact Material: Brass
 Insulator Material: PBT Black
 Plating: Gold plated on surface;
 Nickel underplated overall

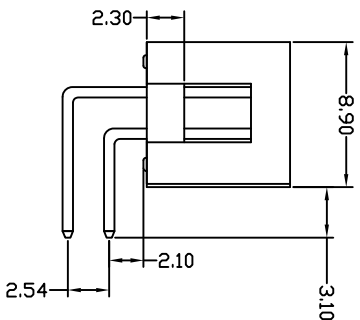

Contact S	Dimensions		
	A	B	C
2*3P	15.24	12.94	5.08
2*4P	17.78	15.48	7.62
2*5P	20.32	18.02	10.16
2*6P	22.86	20.56	12.70
2*7P	25.40	23.10	15.24
2*8P	27.94	25.64	17.78
2*9P	30.48	28.18	20.32
2*10P	33.02	30.72	22.86
2*11P	35.56	33.26	25.40
2*12P	38.10	35.80	27.94
2*13P	40.64	38.34	30.48
2*14P	43.18	40.88	33.02
2*15P	45.72	43.42	35.56
2*16P	48.26	45.96	38.10
2*17P	50.80	48.50	40.64
2*18P	53.34	51.04	43.18
2*19P	55.88	53.58	45.72
2*20P	58.42	56.12	48.26
2*25P	71.12	68.82	60.96

topot 深圳市鑫冠辉电子有限公司

一般公差 COMMON TOLERANCES	图号 DWG. NAME	成品图	绘图 SCALE	比例 SCALE
X	±0.30	BH1-12XX-RBB-G0-TR	LXW	1:1
X.X	±0.25	料号 PART NO.	审核 CHECKED	单位 UNIT
X.XX	±0.20	品名 TITLE	核准 APPROVED	版次 REV.
X.XXX	±0.15	筒牛:2.54 2XNP 90度 L=16/21 PC3.1 PBT	日期 DATE	页次 SHEET
ANGLE	±2°	THIRD ANGLE PROJECTION:	2019-02-20	01
				图幅 SIZE
				A4

编号 DWG. NO.	标记 REV. LTR.	日期 DATE	增加数据表, 尺寸编号	变更内容 REVISION NOTES	签名 SIGN
XGH-DWG-A1635		15.10.26			LXW