

版本	修订内容	日期	绘图	批准
A1	DRG. REL.	2016/10/7	方益强	梅志刚





- 材质及电镀
 - ① 塑件主体: PA66, UL94V-0
 - ② 焊针: 黄铜, 镀锡

- 电气性能
 - 参考标准: UL IBC
 - 额定电压: 300V 400V
 - 额定电流: 15A 20A
 - 接触电阻: 20mΩ(Max)
 - 绝缘电阻: 500MΩ\DC500V
 - 耐电压: AC2500V\1min

- 机械性能
 - 温度范围: -40℃~+105℃
 - 瞬时温度: +250℃ 5秒


订购方式

KF2EDGCR-X-7.5-XXP-1 X-XXXX

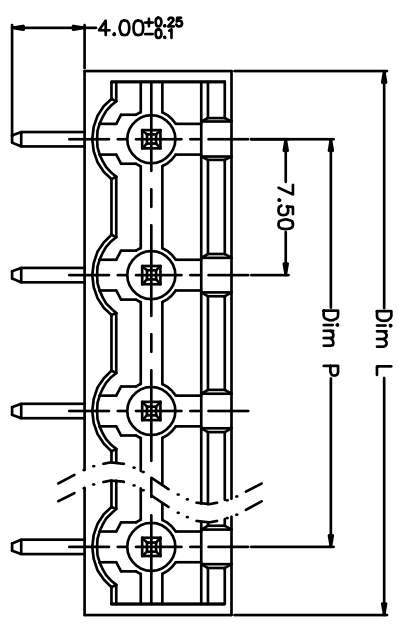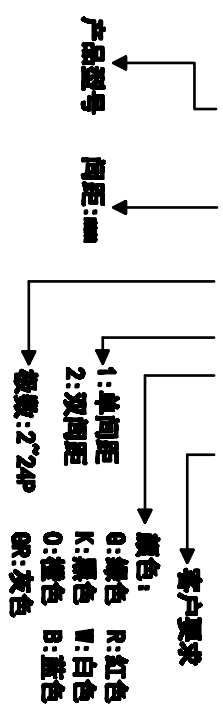

N=Number of Poles
Dim P=(N-1)x7.5
Dim L=Nx7.5

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

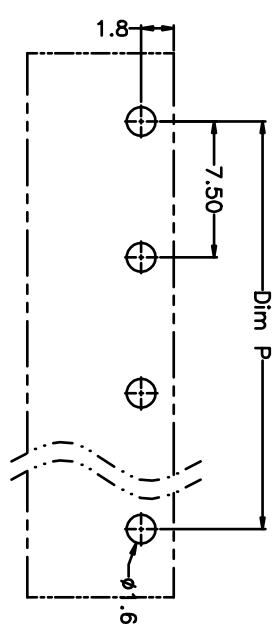

尺寸公差:	±0.5 .X ±0.3 .XX ±0.1	长度公差:	.X. .X. .XX ±1'
比例:	1:1	图例:	1\1
图例编号:	XF001S016-XXXX		

凯峰电子 慈溪市凯峰电子有限公司
KAI FENG ELECTRONIC CIXI KAIFENG ELECTRONIC COLLTD

产品系列: KF2EDGCR-X
规格: mm
单位: A4