
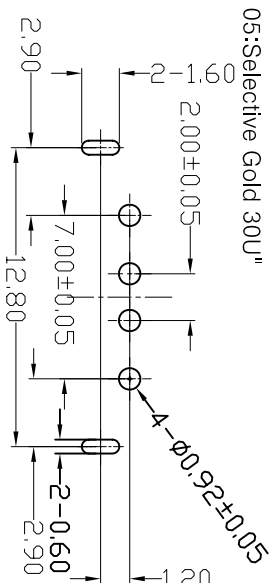
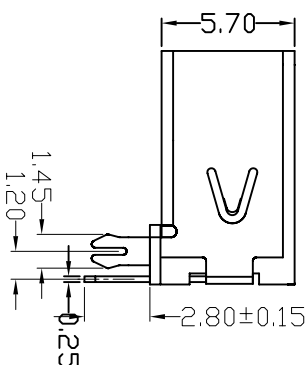
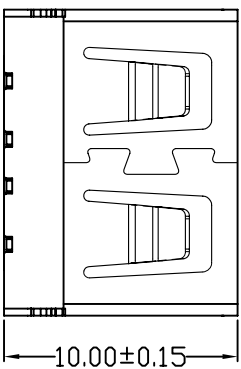
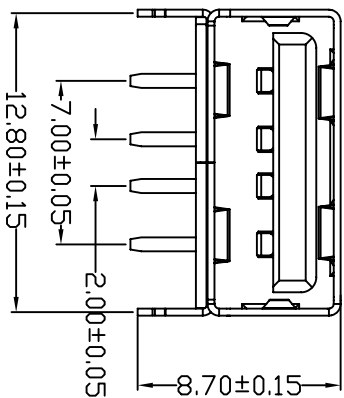


D款, 正向10.0后两脚, DIP



FRONT EDGE OF CONNECTOR
POB LAYOUT (T=1.60mm)

MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0, TERMINAL: SEE NOTES, SHELL: SEE NOTES.
- SPECIFICATION:
- 1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
- 2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
- 3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°C+85°C
- 4.Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

产品图 PRODUCT CHART DWG

公差一览表		TOLERANCE UNLESS OTHERWISE	
X	±0.25	X	±5°
.X	±0.20	X	±2°
XX	±0.15	XX	±1°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	Z-Y-B	制图料号	JTJ-USB-10.0-002
UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.	JTJ-USB-10.0-002
比例	1:1	审核		产品名称	USB A/F 10.0后两脚鱼叉(方弹)
SCALE	1:1	OKD		PRODUCT NO.	
日期	2012/09/24	核准		角法	
DATE	2012/09/24	APPD		VIEW	
				版本	
				VER	
				AD	