HSF RoHS

FILE NO:E362810

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Contact clip(4/6 finger):	Beryllium copper(C17200)
Accepted pin:	Ø0.38 to 0.56mm
Forces:	(polished steel gauge Ø0.43mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000MΩ

Operating temperature:-40°c to +105°c

Soldering temperature:260°c,10s max

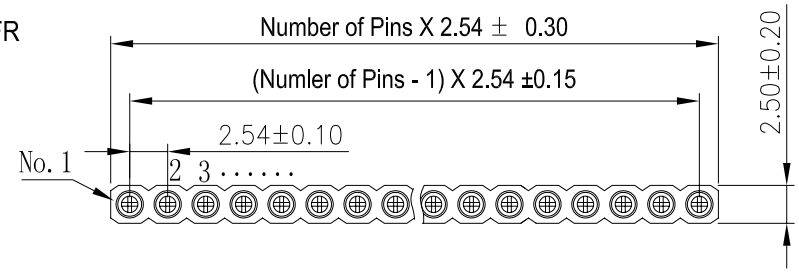

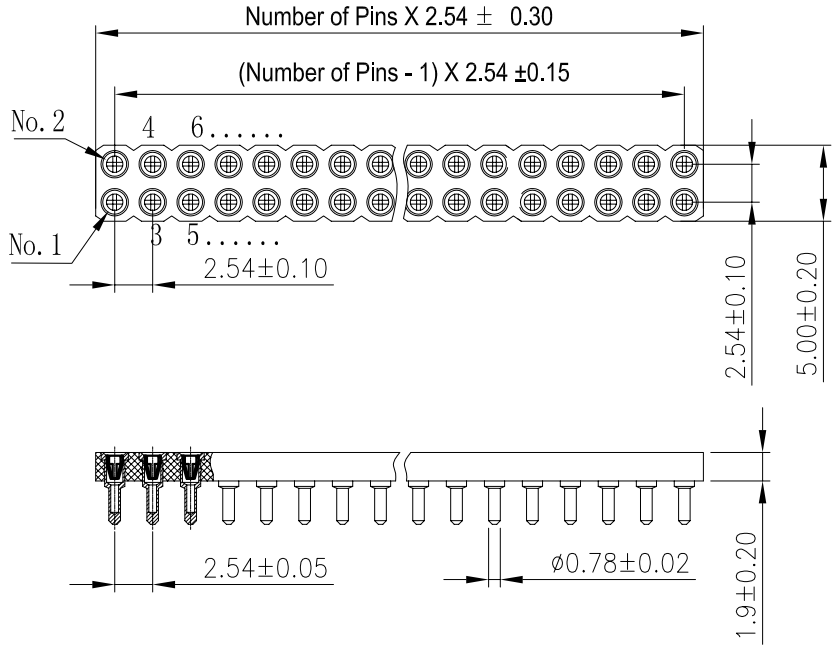

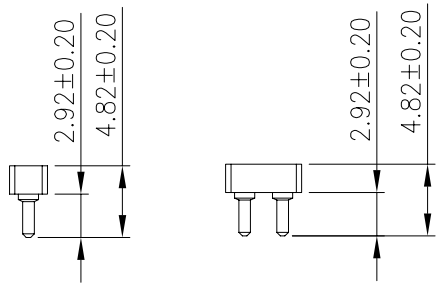

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.08.08	NEW DRAWING	

OPERATION		DRAW	YiYuSheng	12.08.08
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

深圳市连盛精密连接器有限公司

PART NO.	FH-00306
TITLE:	2.54X1.9圆孔排母 1x3p