

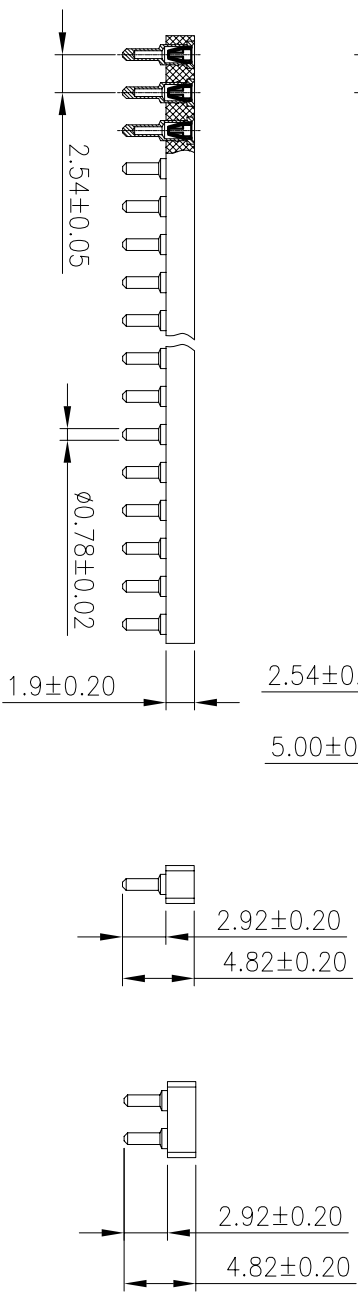


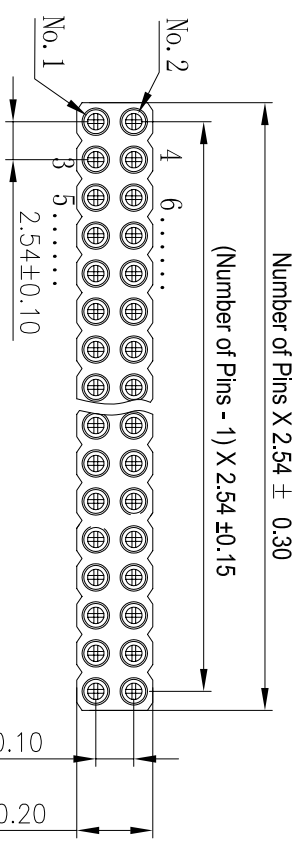

FILE NO: E382810

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass
 Contact clip(4/6 finger): Beryllium copper(C17200)
 Accepted pin: $\varnothing 0.38$ to 0.56mm
 Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 --Insertion 2 N typ
 --Withdrawal 1 N typ
 Mechanical life: min500 cycles
 Rated current: 3A
 Contact resistance: max 10m Ω
 Dielectric resistance: Min 1000M Ω
 Operating temperature: -40°C to $+105^{\circ}\text{C}$
 Soldering temperature: 260°C , 10s max

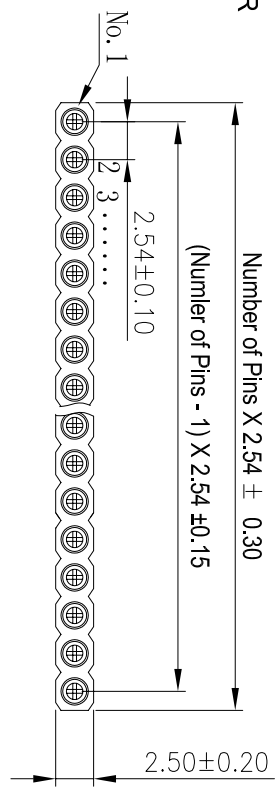

深圳市连盛精密连接器有限公司

PART NO. FH-00308

TITLE: 2.54X1.9圆孔排母 1x21p

OPERATION		SCALE	FIT	PART NO.	
X.X	± 0.30	UNIT	mm	FH-00308	
X.XX	± 0.20	SIZE	A4		
X.XXX	± 0.10	SHEET	1/1		
Angle	$\pm 3^{\circ}$	PROJ.			
DIM	TOL				

OPERATION	DRAW	Y/YuSheng	12.08.08
X.X	CHECK		
X.XXX	APPROVE		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.08.08	NEW DRAWING	
1			