

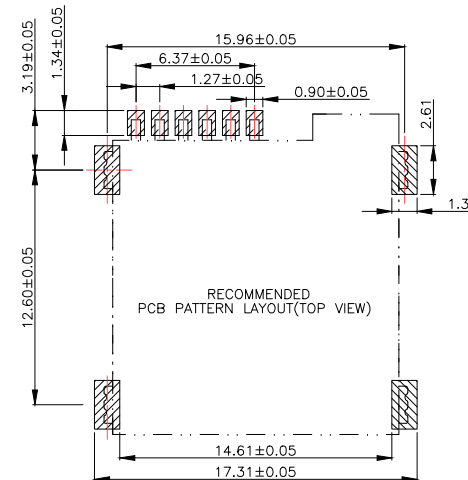


C8	RESERVED
C7	I/O
C6	VPP
C5	GND
C4	RESERVED
C3	CLK
C2	RST
C1	VCC
PIN NO.	PIN NAME

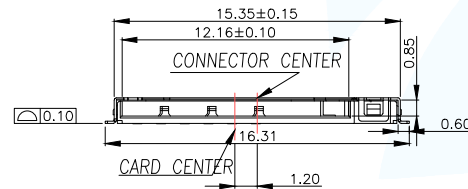

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.5 Amp. MAX.
 - VOLTAGE: 100V DC. MAX.
 - LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - INSULATION RESISTANCE: (INITIAL) 1000Mohms MIN.. (FINAL) 100Mohms MIN. BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.
- MECHANICAL CHARACTERISTICS:
 - DURABILITY: 5000 CYCLES.
 - OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
 - STORAGE TEMP.: -40°C TO 85°C.
- DIMENSIONS MARKED ∇ ARE MAJOR CHECKED DIMENSIONS.
- HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC. NO. "EPI12".
- QUANTITY OF PRODUCTS: 1400PCS/REEL

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: MICRO SIM CARD PUSH PUSH 6PIN H1.35	
DECIMALS:	ANGLES:		PAR	SMC-202S-ARP6
		DWN	YAO	2017.05.20
		CHKD		
		APVD		
		SCALE: 1:1	UNIT: MM	
		CUSTOMER COPY	SIZE: A4	SHEET: 1F1 REV: A