

PRODUCT NO. DSIC121HG1T	NO. 1	RoHS compliant
-----------------------------------	-----------------	-----------------------








2

3

4

REV.	RCN NO.	DR	DATE
-------------	----------------	-----------	-------------

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.
 3. PART NUMBER DESCRIPTION

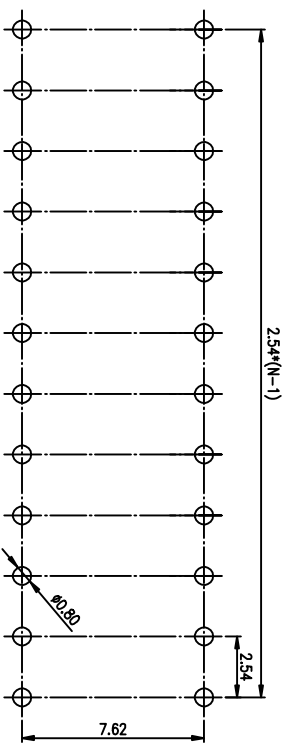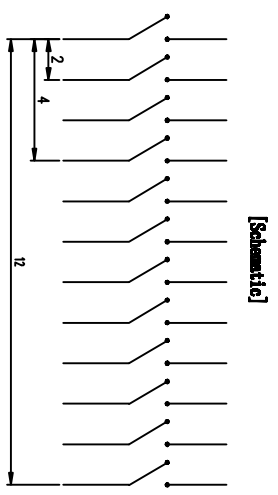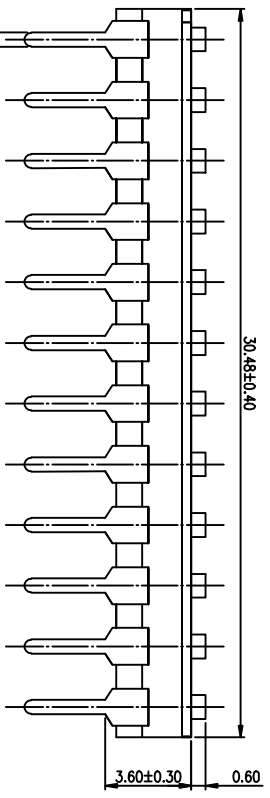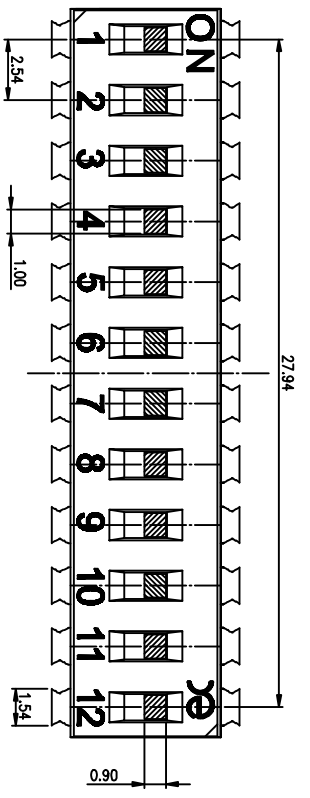

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°		
.00 ± 0.15	.0 ± 1°		
.000 ± 0.10	.00 ± 0.5°		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			

RE 东莞市 睿康电子有限公司
Dongguan Kingtek Industrial Co., Ltd.

TITLE
BY DSIC SERIES PITCH 2.54mm
PRODUCT FAMILY DSIC SERIES
PRAT NO. DSIC121HG1T
FILE NO. DSIC121HG1T-A
SIZE UNIT SCALE SHEET REV.
A4 mm 2:1 1 OF 1 A

1 2 3 4 5 6