
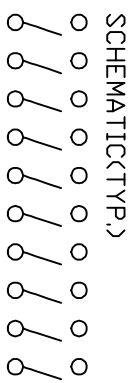
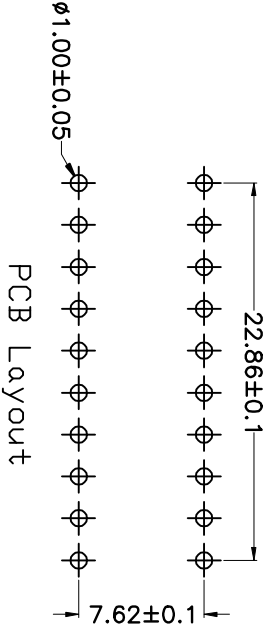
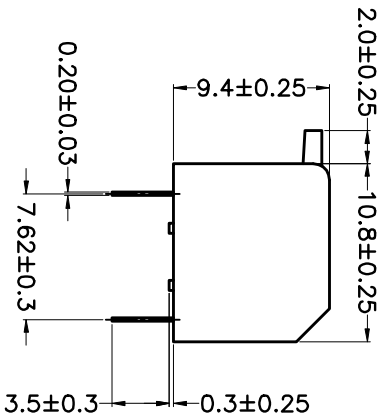
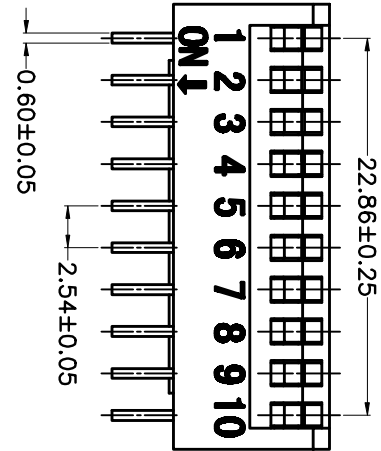



PRODUCT NO.	DSDP10LHG1
RoHS compliant	

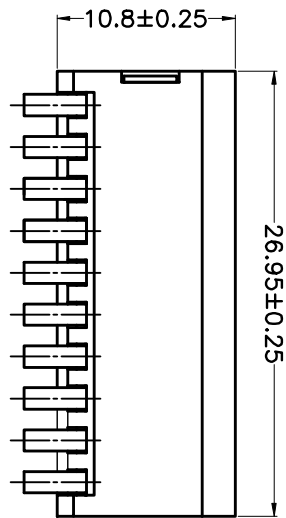

- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
 - Electrical: 2000 Operations per switch 24/VDC, 25mA.
 - Non-Switching Rating: 100mA, 50/VDC.
 - Switching Rating: 25mA, 24/VDC
 - Contact Resistance: 100 mΩ Max. at initial.
- Mechanical
 - Mechanical life: 2000 Operations per switch.
 - Operation Temp: -20°C to 70°C.
 - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DP 10 L H G E T

- [Packing: T=Tube R=Reel]
- [Finish: G=Full Gold-plated R=10 μ" Gold-plated]
- [Finish: G=Full Gold S-Contact Gold-plated, Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe I=Extension]
- [H=Half-Pitch IC=IC type PV=Prano type DR=DR type]

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	PROJECTION	 东莞市 睿实业有限公司 Dongguan Kingtek Industrial Co., Ltd.	
LINER	ANGLES		TITLE	BY DSDP SERIES PITCH 2.54mm
0 ± 0.30	0 ± 1°		PRODUCT FAMILY DSDP SERIES	
.00 ± 0.20	.0 ± 0.5°		PRAT NO.	DSDP10LHG1
.000 ± 0.10	.00 ±		FILE NO.	DSDP10LHG1-A
DESIGN	LU ER XIN	2013/07/02	SIZE	UNIT SCALE SHEET REV.
DRAWING			A4	mm FIT TOP 1 A
CHECK				
APPRO.				