
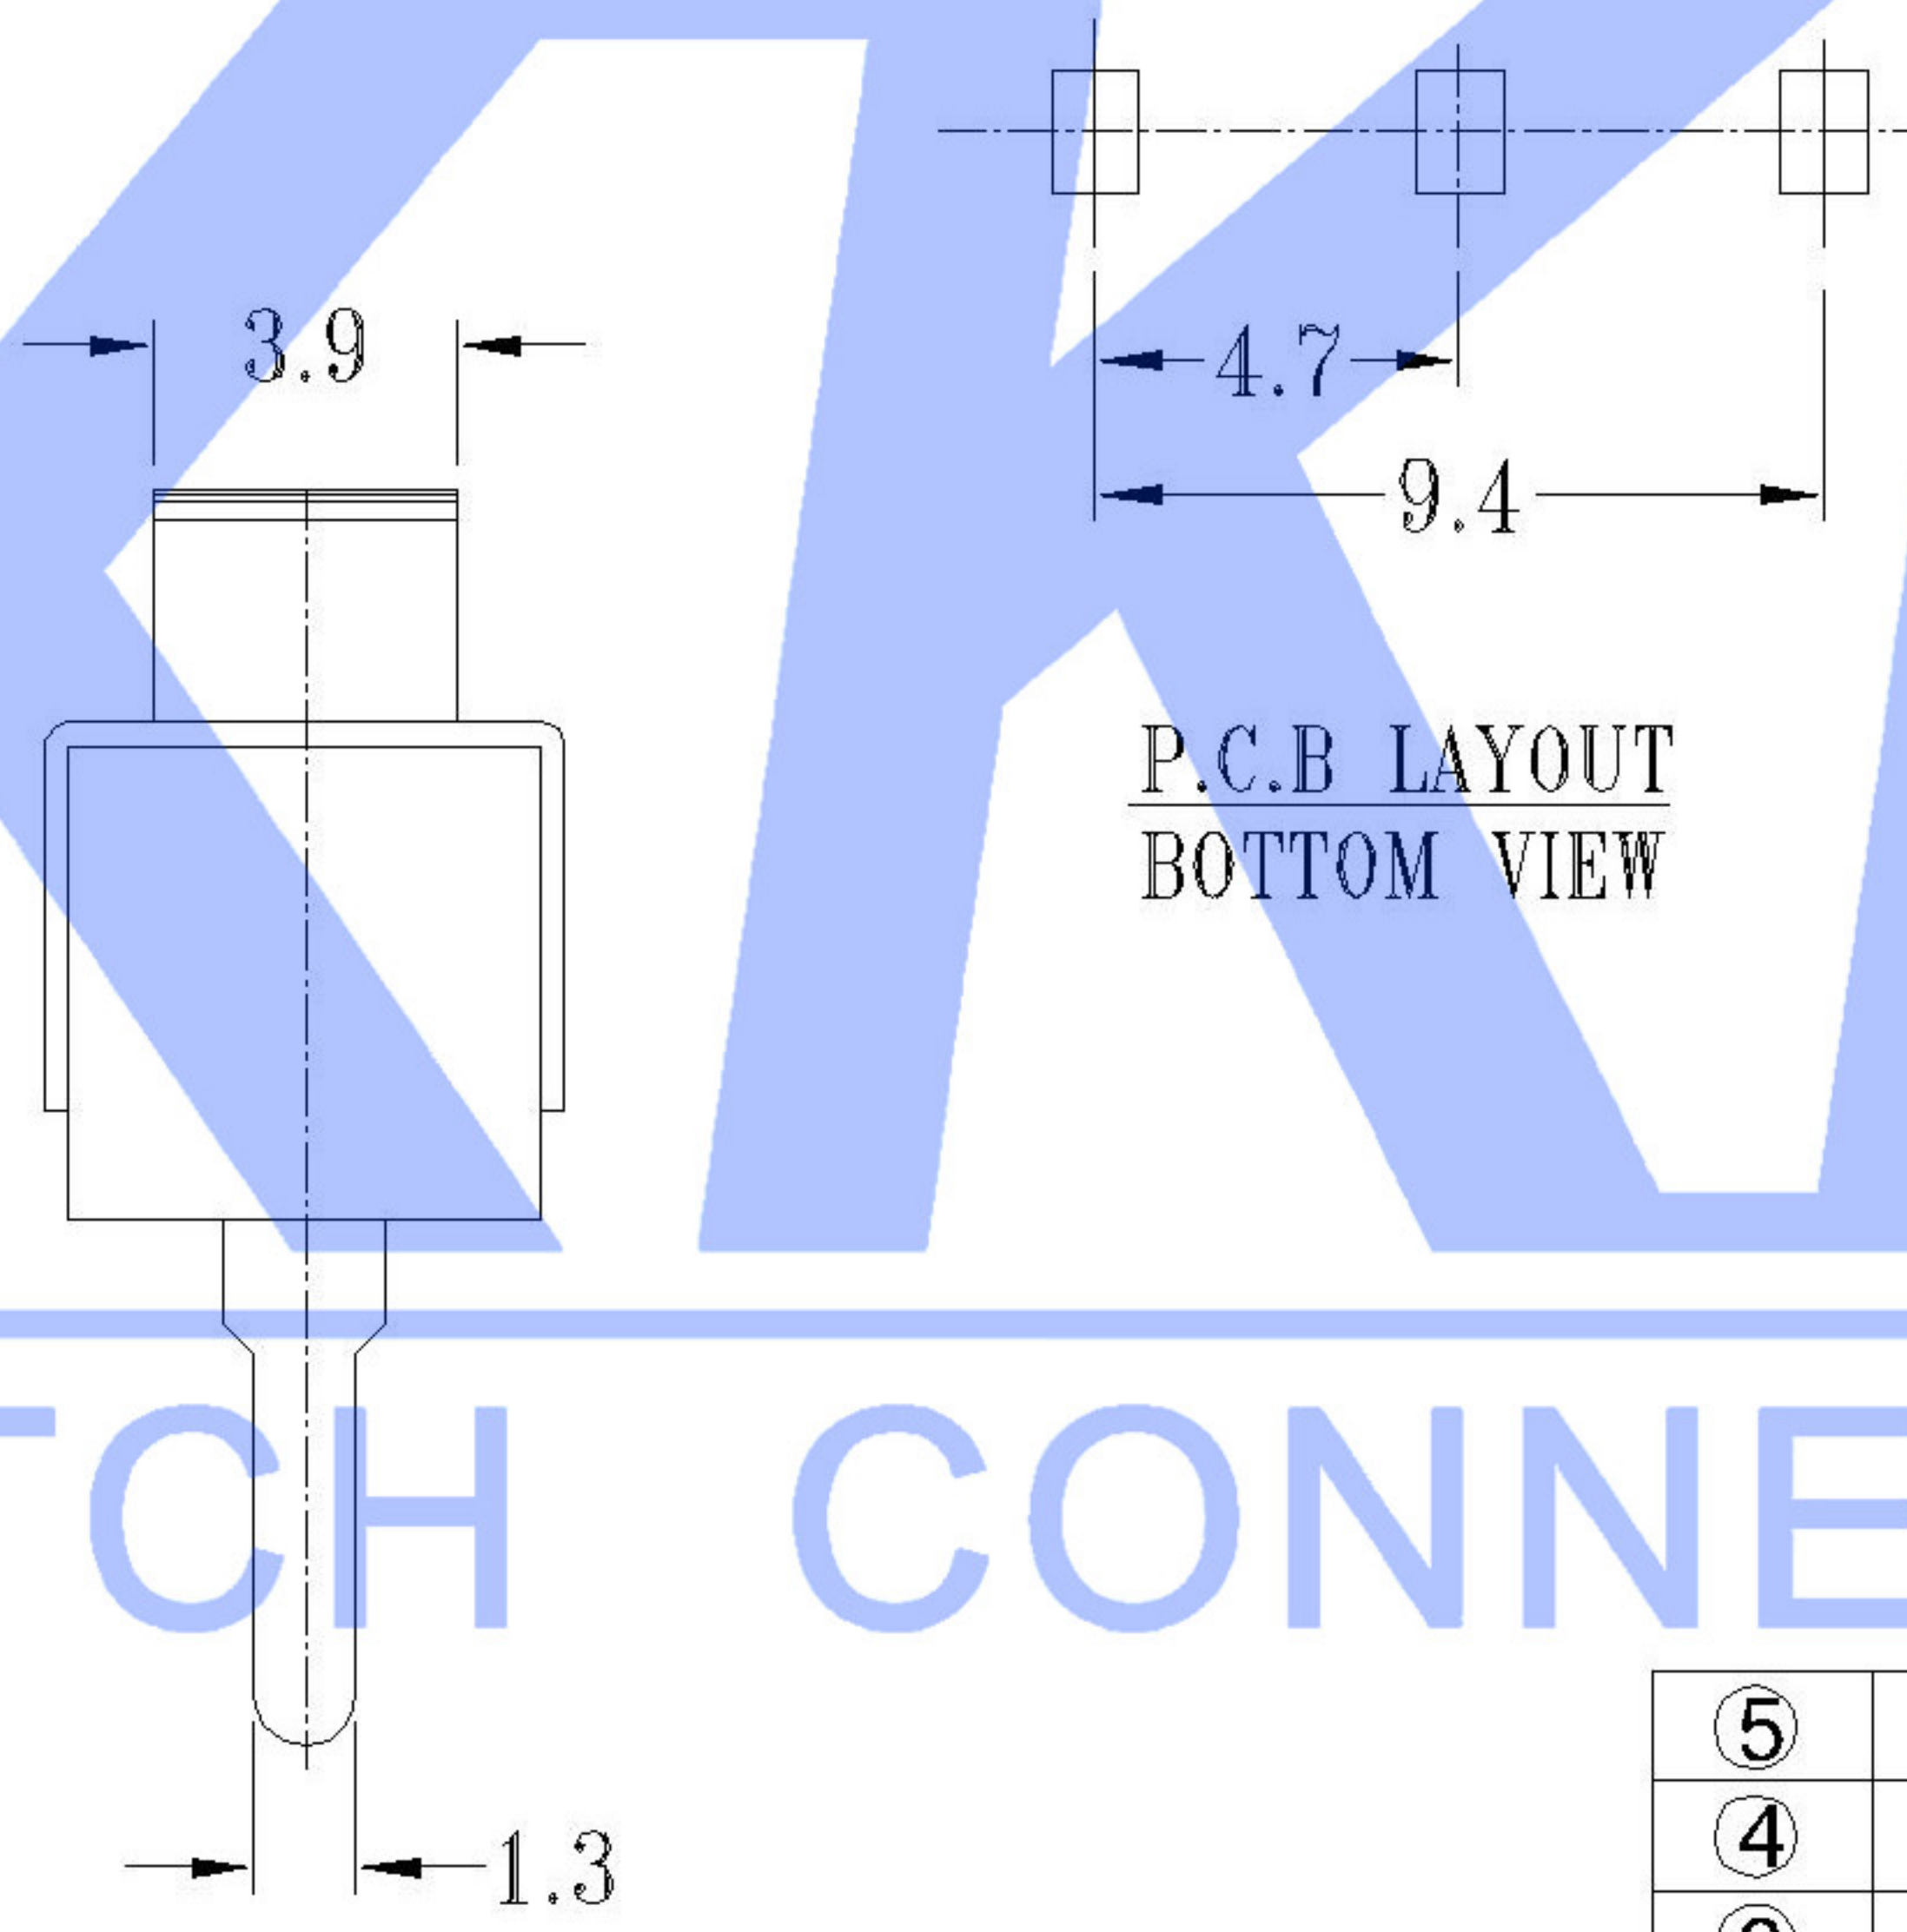


SCHEMATIC (NON-SHORTING)


MODEL CODE

SS-12D10-X-X-X

Knob Type	H (mm)	Colour
L	2 ~ 12	B:Black
G		R.Red

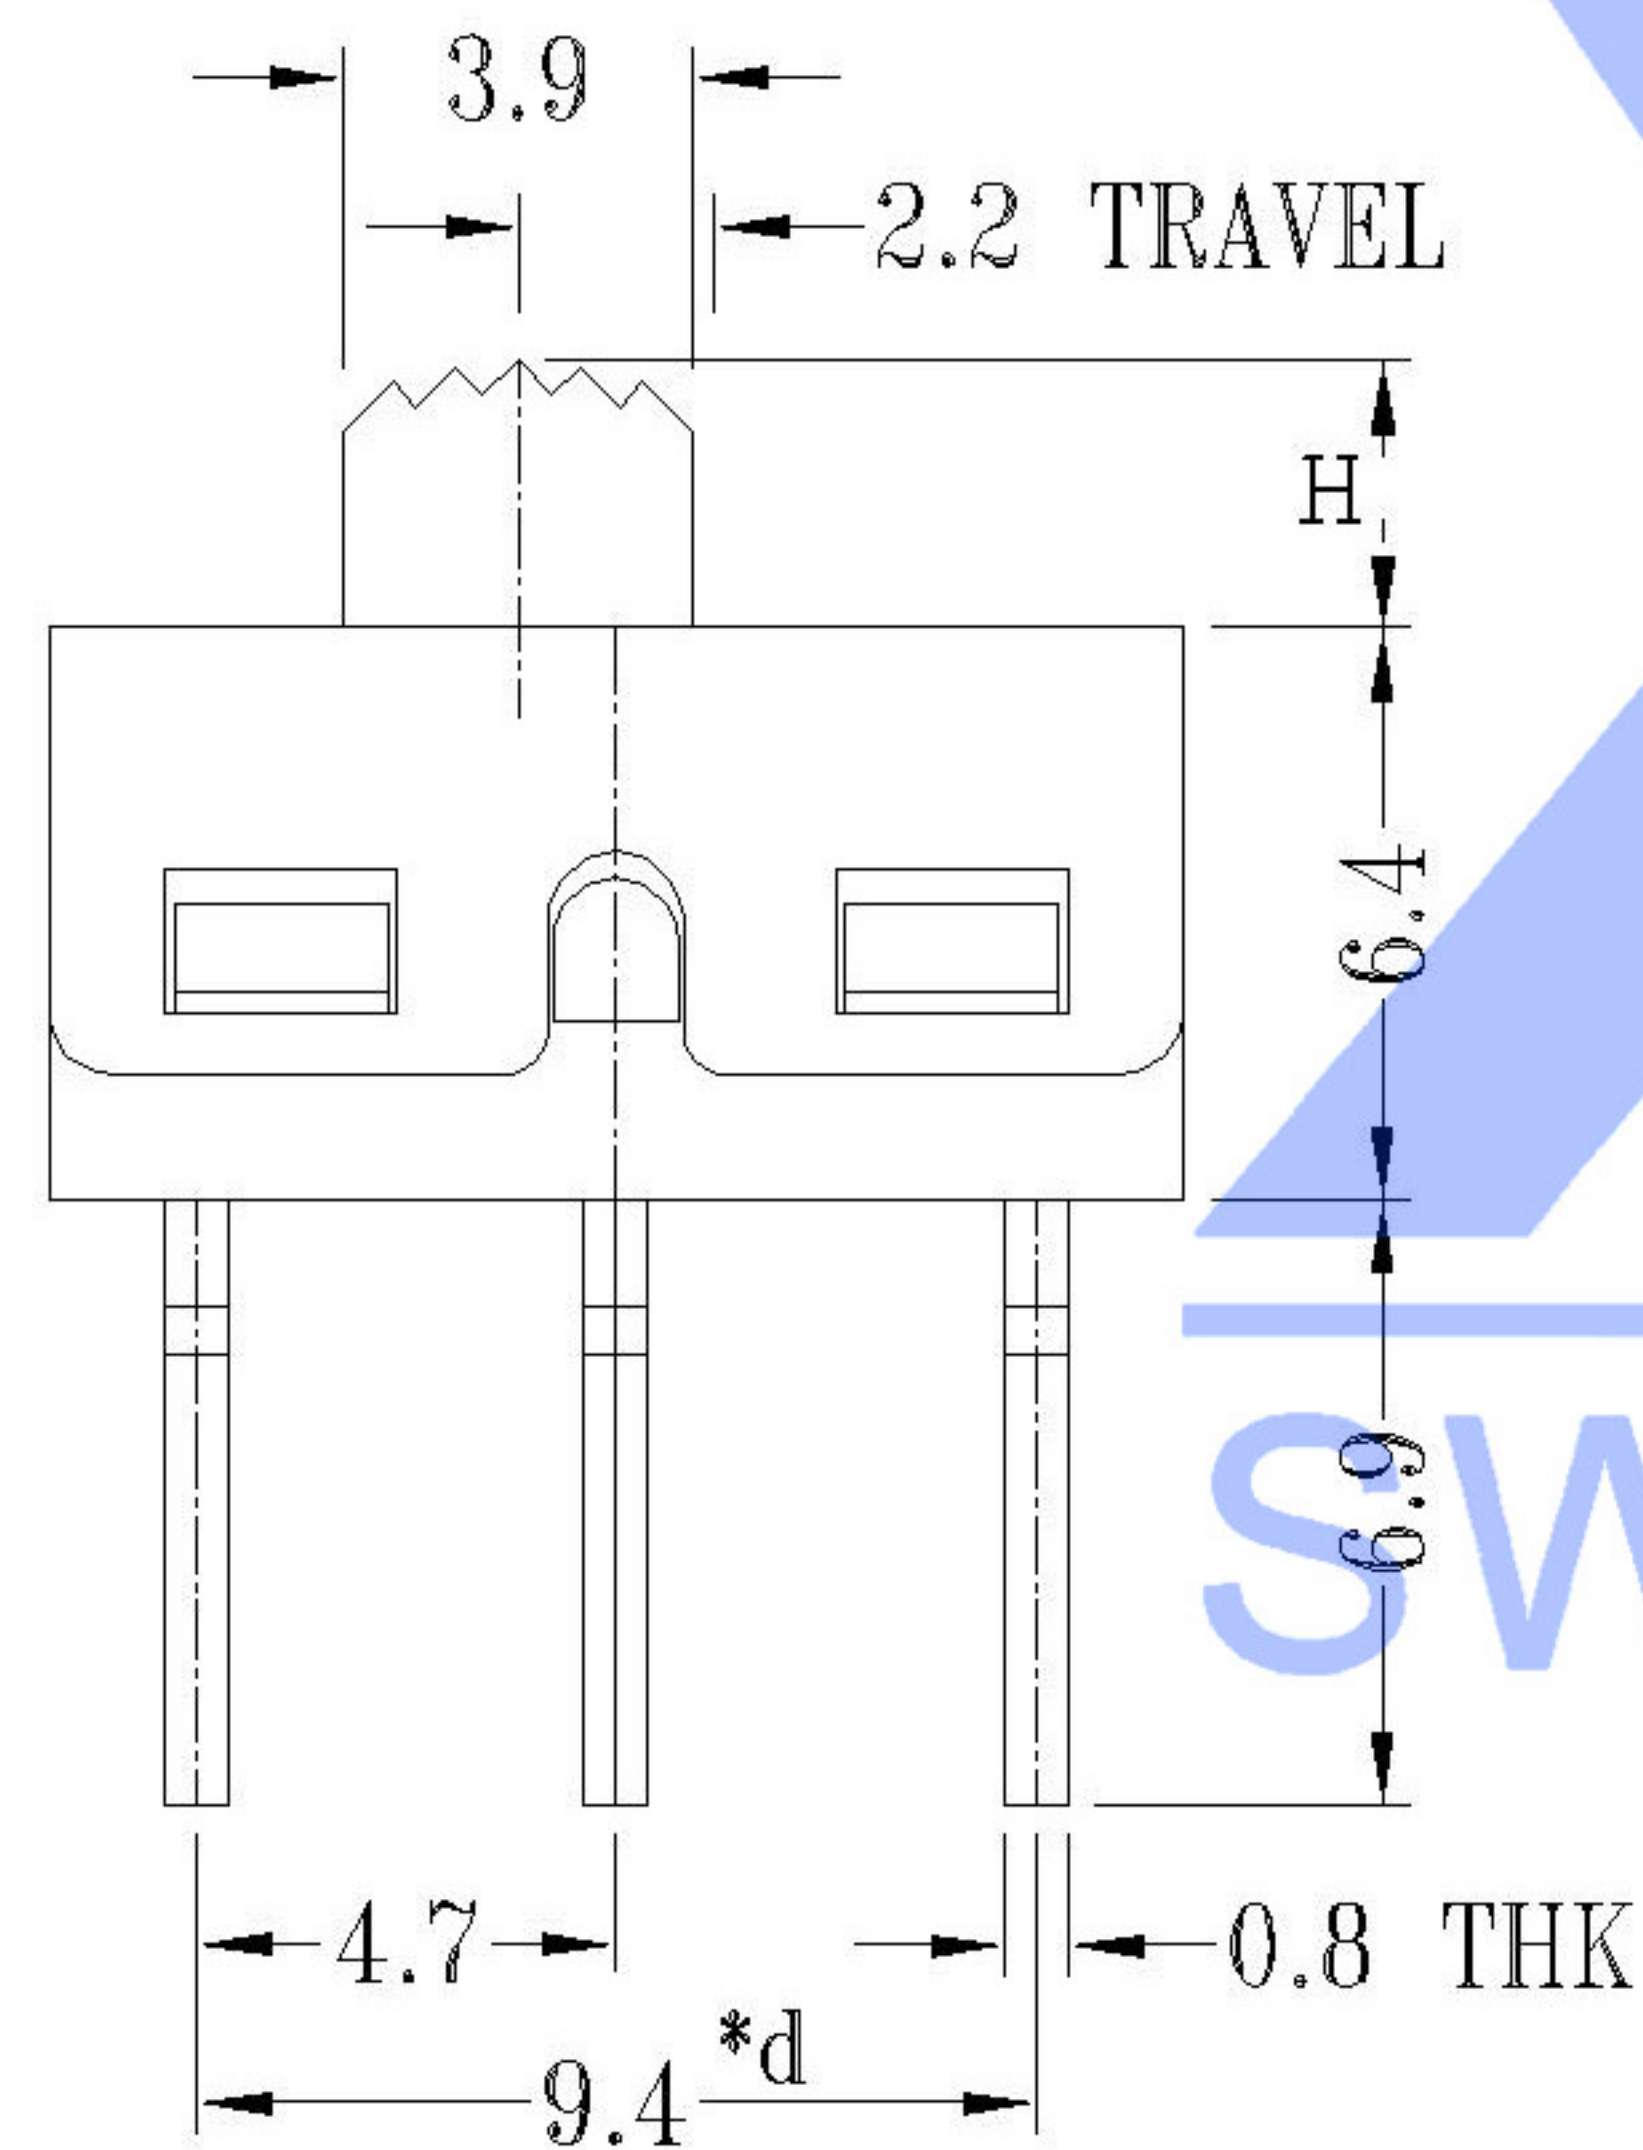

P.C.B LAYOUT  
BOTTOM VIEW

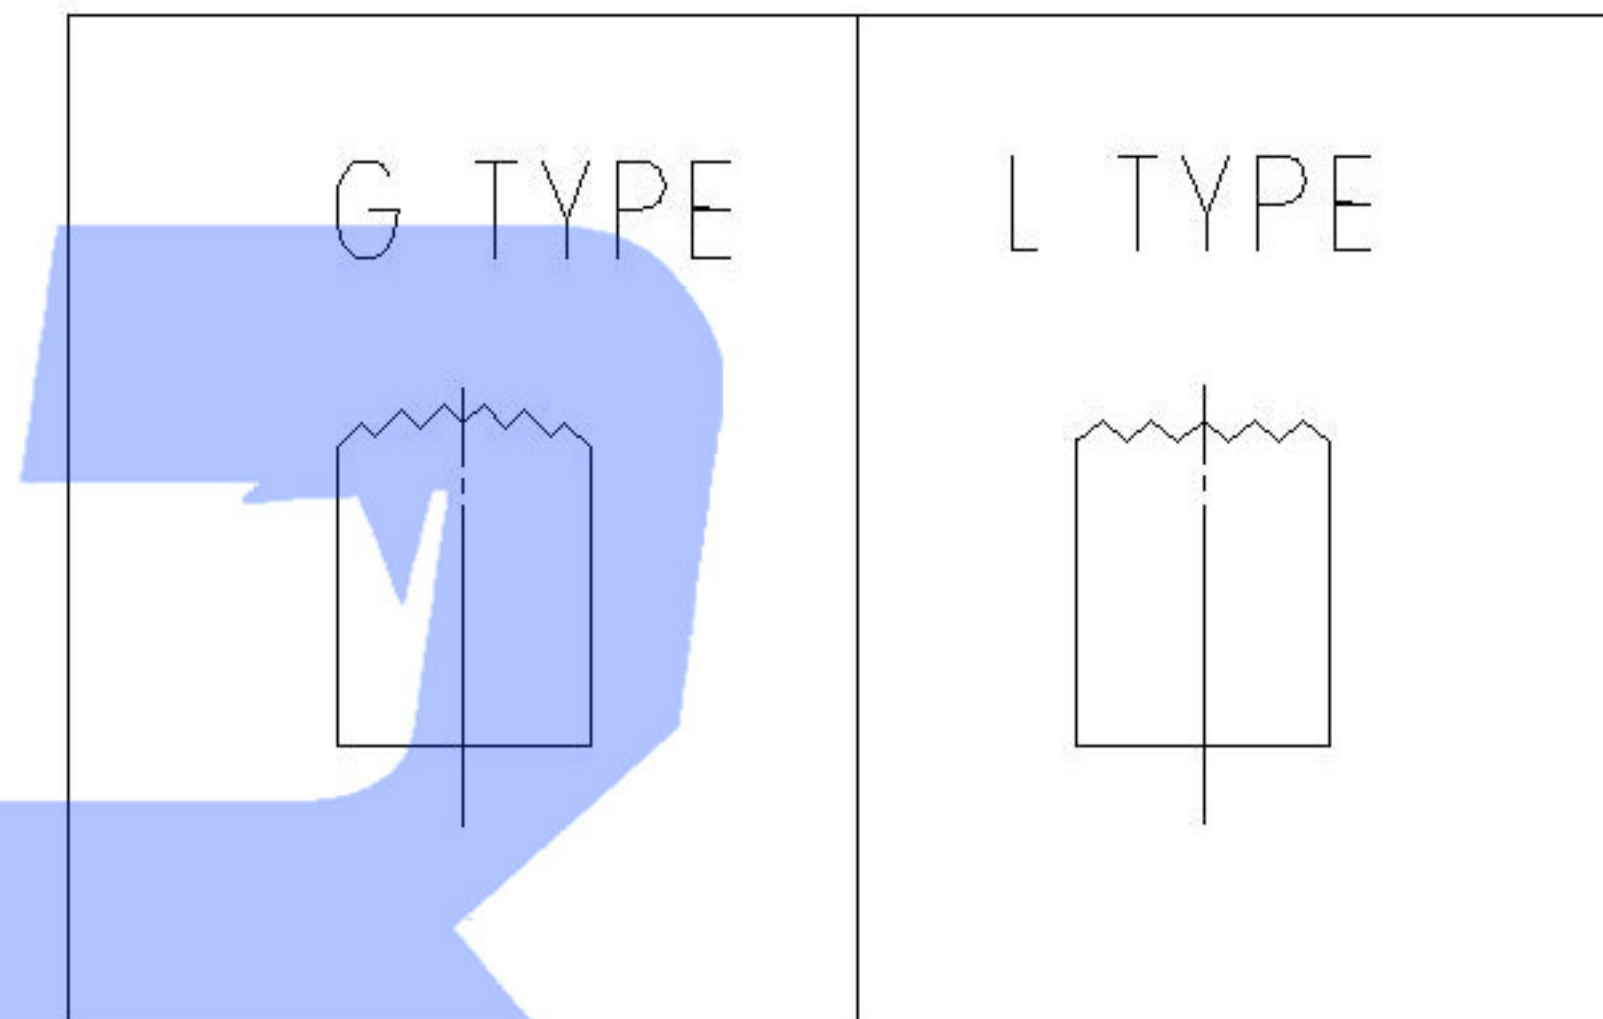

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance: 1,000M min
3. Dielectric Strength: 1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGULAR	TOLERANCES
ΔX					X.X	±5°
ΔX					X.XX	±0.2mm
ΔX					X.XXX	±0.1mm
						±0.05mm
REVISIONS						
UNSPECIFIED TOLERANCES						
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						

DSND	DATE	SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	SS-12D10-XX-X
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0