目錄 MAPX	设变内容 MODIFICATION	日期 DATE

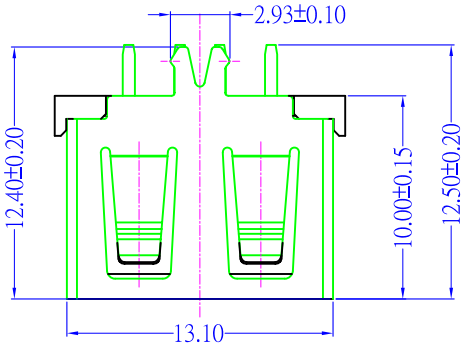



ORDER INFORMATION:

Q2T16— □□□□□□—□

- Shell Plating: 1-Fe Plating Ni, 2-Cu Plating Ni, 3-Fe Plating Au, 4-Cu Plating Au
- Contact Material: 1-Brass, 2-Phosphor Bronze
- Contact Plating: 1-Plated Au 1U", 2-Plated Au 3U", 3-Plated Au 5U", 4-Plated Au 10U", 5-Plated Au 15U", 6-Plated Au 30U", 7-Plated All Au
- NSS-test Time: 1-12H, 2-24H, 3-48H
- Housing Color: 1-White, 2-Black, 3-Nature
- Housing Material: 1-PBT, 2-LCP, 3-PA6T, 4-PA9T
- Packing: 1-Bag, 2-Tray

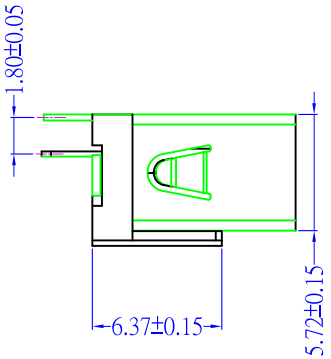

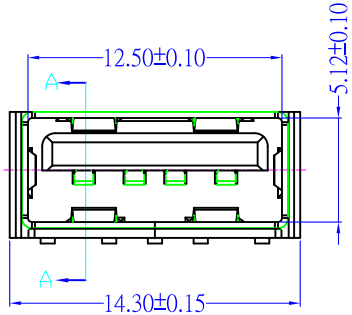

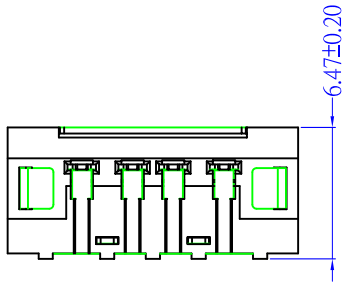



SECTION A-A

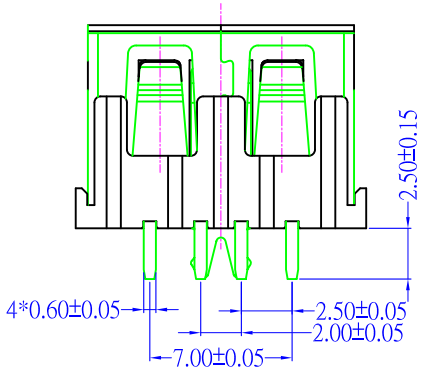



PCB LAYOUT

ELECTRICAL CHARACTERISTECS:

Temperature Range : -20° Cto+85° C
Voltage Current Rating : 1AMP.30V AC
Insulation Resistance : 1000M OHM Min
Contact Resistance : 30m OHM Max
Dielectric Withstanding Voltage : 500V AC

Mechanical:

Mating Force:3.57 Kgf MAX
Unmating Force:1.02 Kgf MIN.

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X'.	±5'
.X	±0.20	.X'	±2'
.XX	±0.15	.XX'	±1'
.XXX	±0.10	.XXX'	±0.5'

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	
比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	USB-A/F10MM短体180度侧边鱼叉脚
日期 DATE	2013.05.10	核准 APPD	雷永键	角法 VIEW	版本 VER: A0