


MAPX	MODIFICATION	DATE
------	--------------	------

- Specifications:
- 1.Current Rating:1.0A at 30V AC.
  - 2.Withstanding Voltage: 500V AC for one minute.
  - 3.Insulation Resistance:1000MΩ Min.
  - 4.Contact Resistance: 30mΩ Max.
  - 5.Mating Force:3.57kgf Max.
  - 6.Ummating Force:1.02kgf Min.

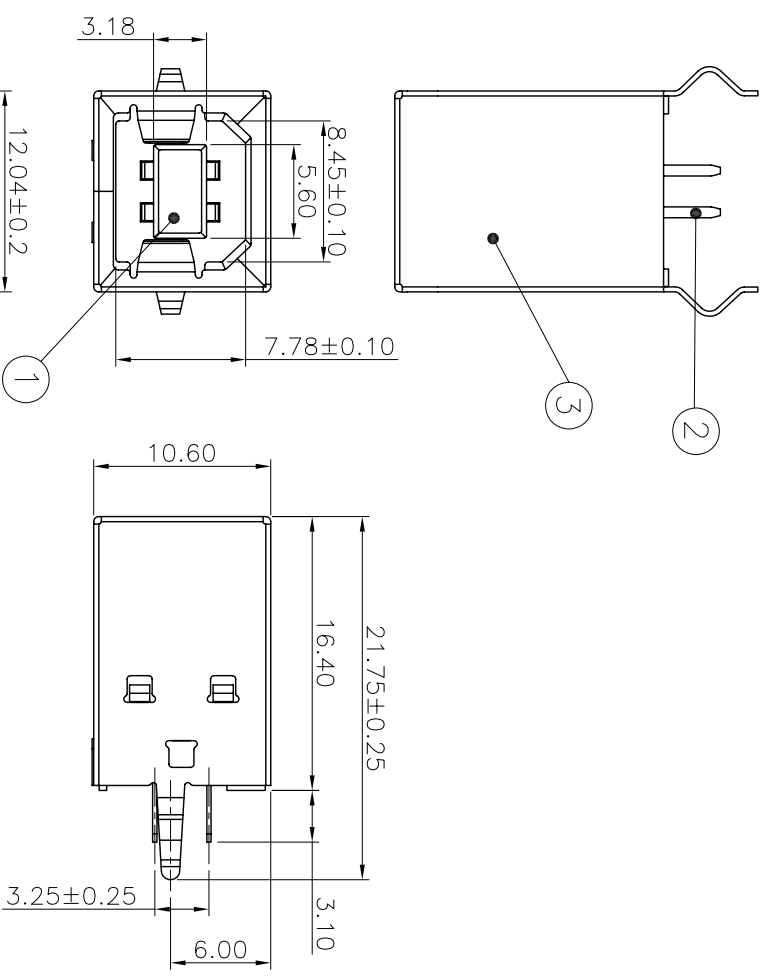

3	外壳	SPCC	—	NICKEL/GOLD PLATED
2	端子	C5191	—	GOLD/TIN PLATED
1	胶芯	PBT	WHITE/BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

# 深圳市精拓金电子有限公司

产品图		制图料号	
公差一览表		PRODUCT PART NO.	
TOLERANCE UNLESS OTHERWISE	单位	制图	产品名称
X ±0.35	MM	DRAWING	USB B/F 180° 插板式(胶壳)
X ±0.30	1:1	审核	角法
XX ±0.20		审核	VER
XXX ±0.10		批准	AD
	日期	日期	
	2016-09-09	2016-09-09	

