
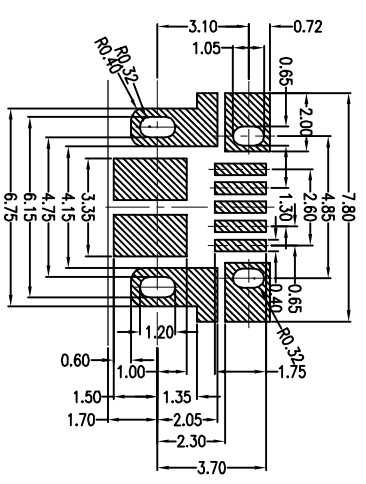








REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE



RECOMMENDED PCB PATTERN  
Tolerance:±0.05

Note:

- Material:
  - Housing: LCP High temperature thermoplastic with 9-f:UL94V-0
  - Contact: copper alloy,t=0.15mm
  - Shell: SUS304,t=0.30mm
- Specification:
  - Current rating: 1 A Max. voltage: 100 V(ac) for 1 min.
  - Contact resistance: 50 mW Max.
  - Insulation resistance: 100 MW Min.
  - Total mating force: 3.57 Kgf Max.
  - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
  - Temperature range: -30C~80C

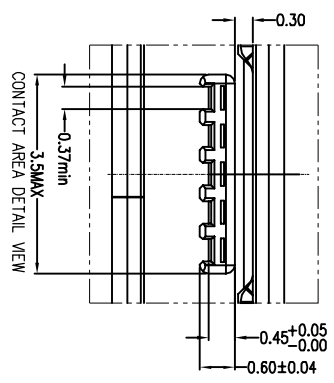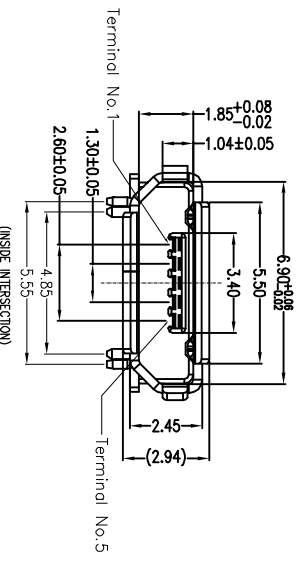

深圳市精拓金电子有限公司

PART NO:	A01SB7X4X1B21-167	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED			
.X		0.25	
.XX		0.15	
.XXX		0.10	
Ang		1°	

TITLE: MICRO USB 5S B TYPE牛角型斜后盖插板5.55

DR:	夏友红
CHK:	
APP:	

DWG NO:	A167	REV:	A
SCALE:	4:1	DATE:	2012.07.13



F

E

D

C

B

A

1 2 3 4 5 6 7 8