


RoHS




SPECIFICATIONS

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

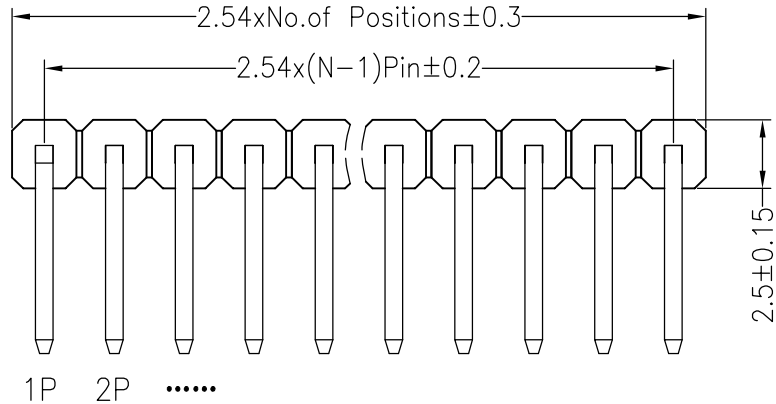

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

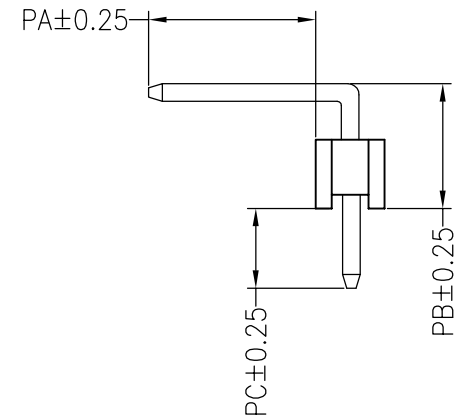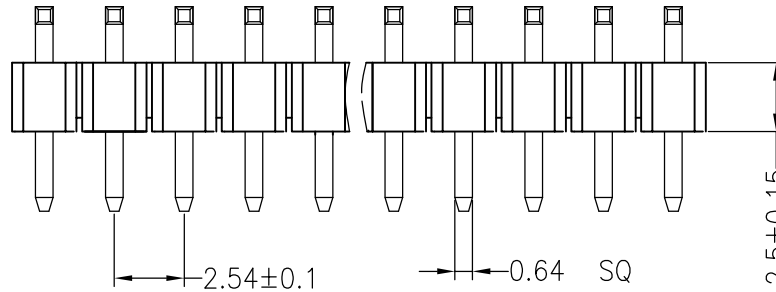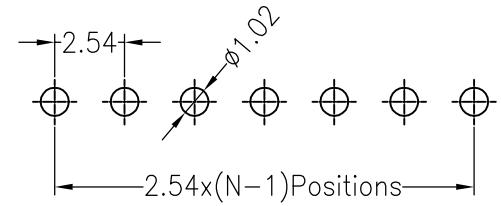

| Dimension antitheses list |      |      |      |       |
|---------------------------|------|------|------|-------|
| ITEM                      | PA   | PB   | PC   | L     |
| Standard                  | 10.0 | 3.90 | 3.00 | 17.50 |
| Alternate                 |      |      |      |       |

深圳市连盛精密连接器有限公司

PART NO.

PH-00922

TITLE:

2.54PH H=2.5 1X10P 反弯 PA10.0  
 PB3.9 PC3.0 L=17.5 AU0.8U PA6T

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3'

DIM

TOL

DRAW

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

A

A0 2012.03.28

NEW DRAWING

REV DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9