





SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

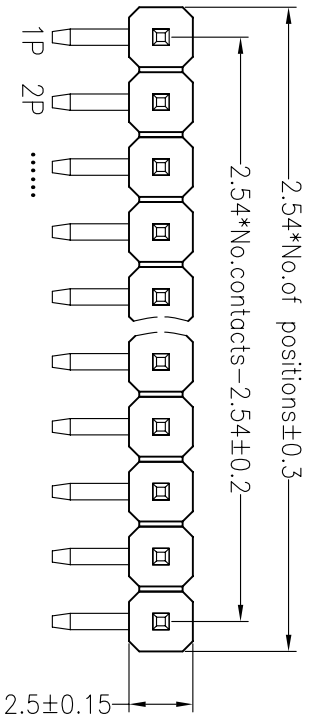

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

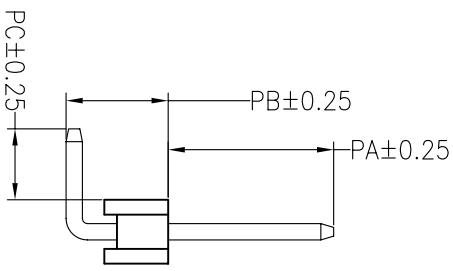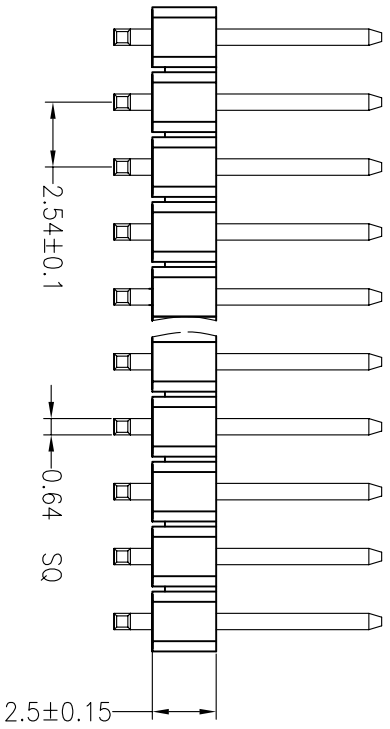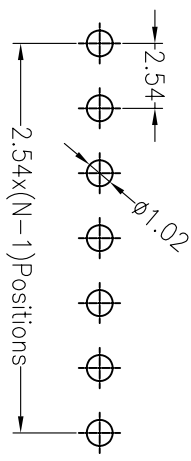

ITEM	PA	PC	PB	L
Standard	6.00	3.00	4.40	13.80
Alternate				

深圳市华灿天禄电子有限公司

PART NO. PZ254-1-N-W-8.5

TITLE: 2.54mm Pin Header 2.5mm Single 90°正弯

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	WZG	SCALE	FIT
A0	2012.07.02	NEW DRAWING		X.X ±0.30		14.08.08	UNIT mm	
				X.XX ±0.20	CHECK		SIZE A4	
				X.XXX ±0.10			SHEET 1/1	
				Angle ±3°	APPROVE		PROJ.	
				DIM				