


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating: 1.5 AMP, 30V AC
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 30 MΩ Max.
- Dielectric Withstanding Voltage: 500W AC
- Temperature Range: - 55° C to +85° C
- Insulator color: Black/White
- Plastic material: PBT/LCP
- Shell finish: Nickel plated/Tin-Lead plated
- Contact finish:
 - 01: Selective Gold Flash
 - 02: Selective Gold 3U"
 - 03: Selective Gold 5U"
 - 04: Selective Gold 15U"
 - 05: Selective Gold 30U"

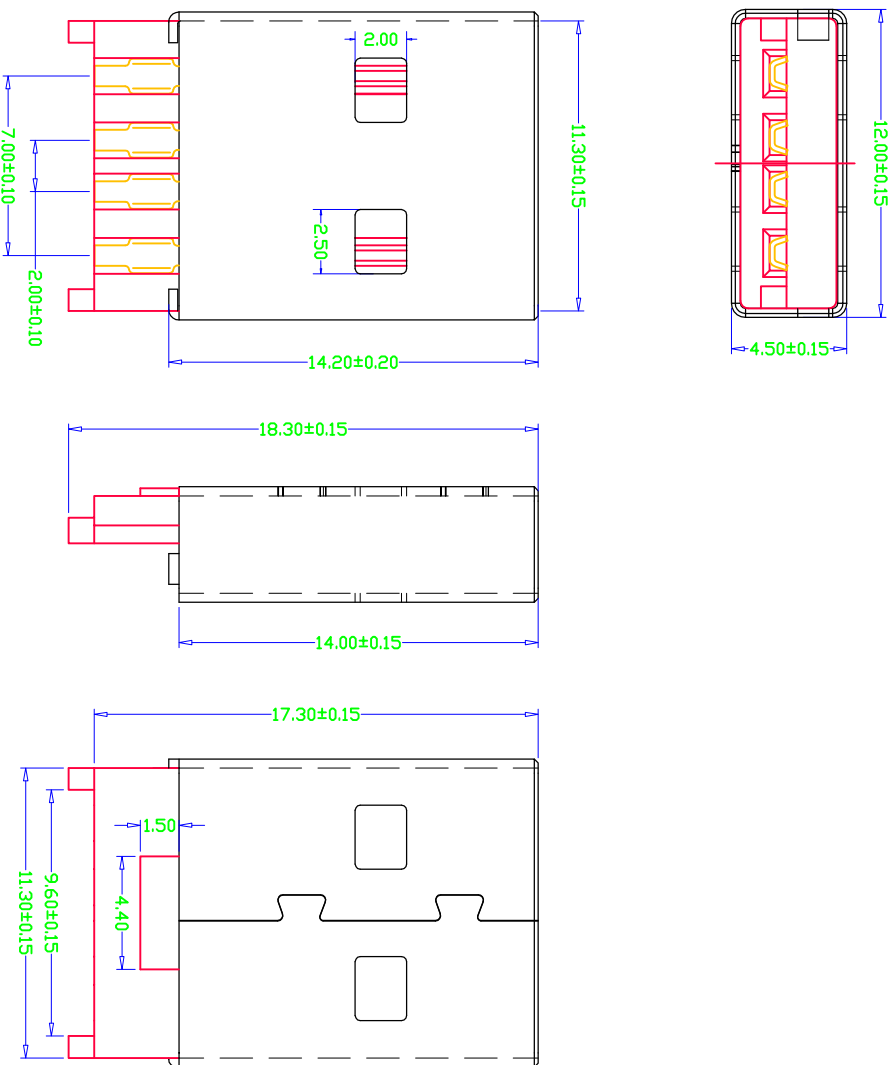

公差一览表	
TOLERANCE UNLESS OTHERWISE SPECIFIED	公差一览表
X	±0.25
X	±0.20
XX	±0.15
.XXX	±0.10

单位	MM	制图	Z-Y-B	制图料号	
比例	1:1	审核		产品名称	USB A/M短体前壳
日期	2011.10.15	核准		PRODUCT NO.	
DATE		APRD		角法	版本
				VIEW	VER

深圳市精拓金电子有限公司

