

MAPX	MODIFICATION	DATE
------	--------------	------

特性: Specifications:

电器: Electrical:

接触阻抗: Contact Resistance:
30 milliohms MAX

耐电压: Dielectric Withstanding Voltage:
100V AC AT Sea Level

绝缘阻抗: Insulation Resistance:
110 MEGA ohms MIN

材料: Material:

塑胶: Housing Hing Temperature Thermoplastics
PBT UL 94V-0塑胶


端子: Contact: C2680 (H65) 黄铜 T=0.2mm

外铁壳: Shell: SPCC 铁 T=0.3mm

端子: Contact: Plated Gold in Mating Area,
Tin On solder Tails

接触点镀金IU", 焊锡脚镀锡100-120U".

盐雾测试过24小时.

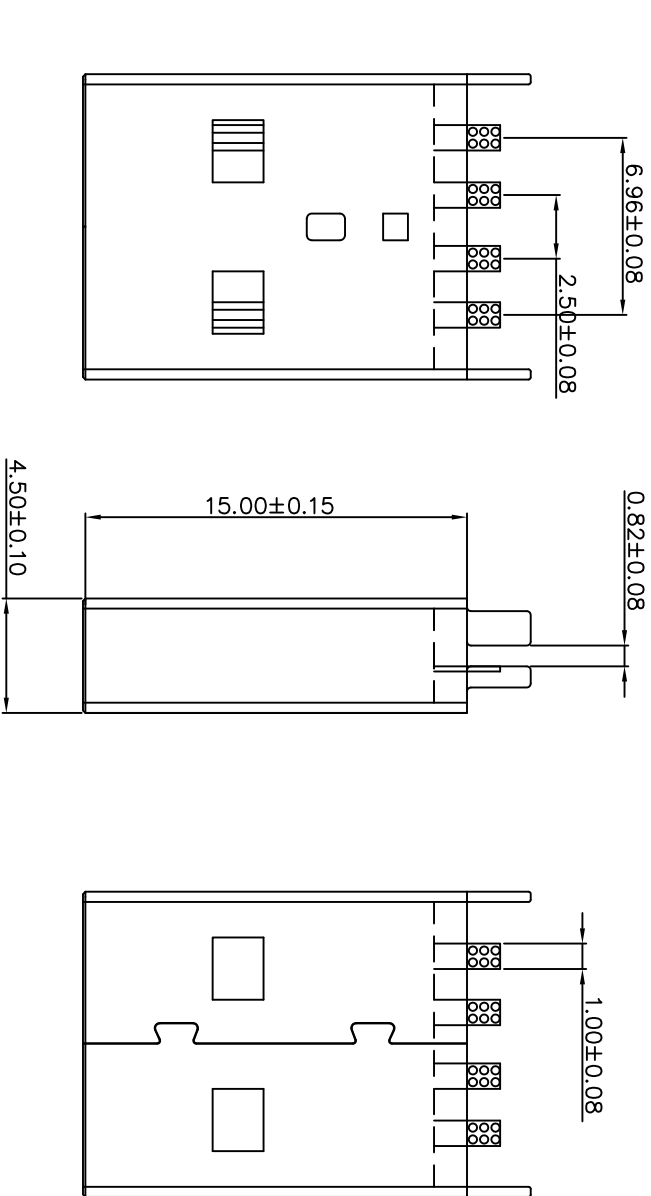

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表

单位: MM

制图: 许榕强

制图料号

TOLERANCE UNLESS OTHERWISE

UNITS: MM

DRAWING: 审核: 郭治富

PRODUCT PART NO

X. ±0.35 X. ±5°

SCALE: 1:1

CHKD: 郭治富

PRODUCT NO

XX ±0.20 .XX ±1°

DATE

APPR: 黄国荣

角法

XXX ±0.10 .XXX ±0.5°

DATE

VER: AD

版本