



Code-X	H	Code-X	H
A	4.3	O	11
B	4.5	P	11
C	5.0	Q	12
D	5.5	R	12
E	6.0	S	12
F	6.5	T	12
G	7.0	U	12
H	7.5	V	12
I	8.0	W	12
J	8.5	X	12
K	9.0	Y	12
L	9.5	Z	12
M	10.0		
N	10.5		

Circuit diagram



SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

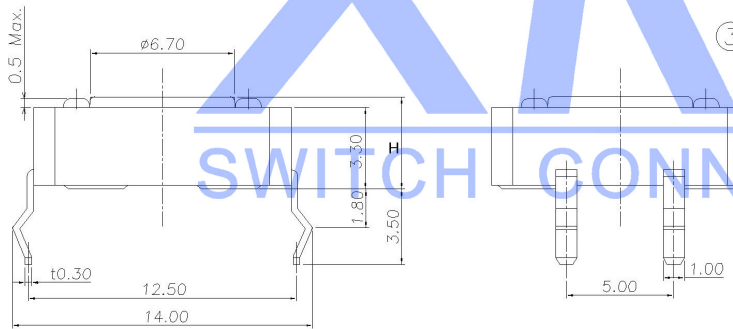

PAPT NO	TC-1103-X-X
Operating Force	B: 160gfC: 260gf
Height	Code-X

MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: TAC
ΔX						ANGULAR ±5°	DWN	DATE	VIEW: 3/4	PART NO.: TAC
ΔX						L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.: TAC
ΔX						4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	WEIGHT 1.0g
						16 < L ≤ 63 ±0.4	XKB INDUSTRIAL PRECISION CO., LIMITED			
						L > 63 ±0.5				

www.xk-dg.cn www.1k0k.com www.1k0k.cn