环保物料

TEL:0769-82001899

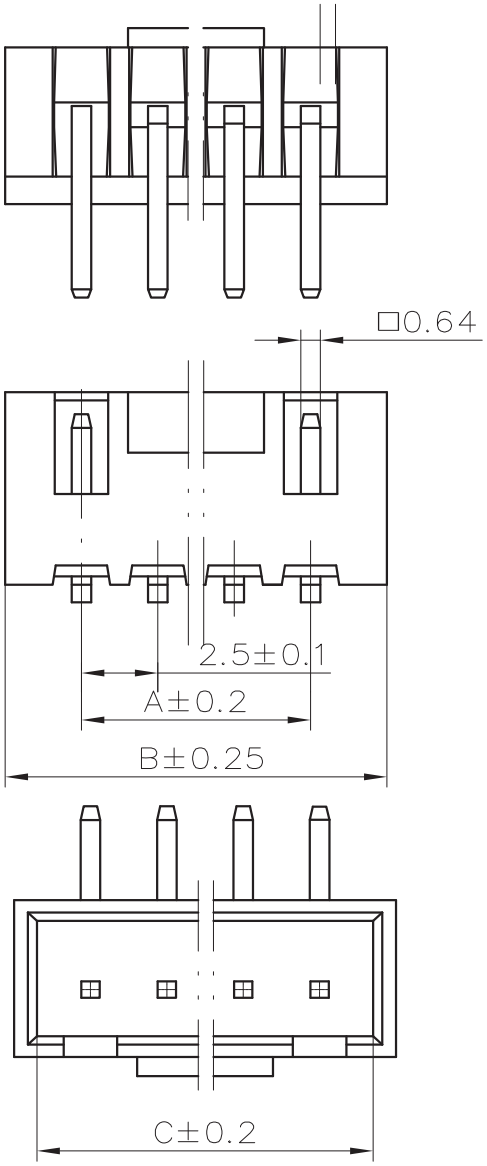

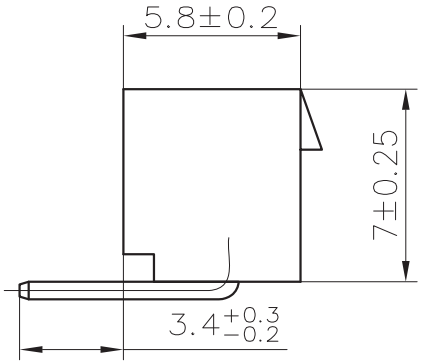

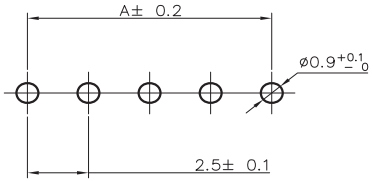

P.C.B LATOUT

SPECIFICATIONS

1.Voltage rating: 250V AC, DC
2.Current rating: 3A, AC, DC
3.Withstanding Voltage: 1000V AC/minute
4.Insulation resistance:1000MΩ min
5.Temperature range: -25 ° C~+85 ° C
6.Contact resistance: 10mΩ max

WAFER

Housing Material: Nylon UL 94V-0 (2)
Pin Material: Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated Gold
Mates with :P2501L series Housing
Poles:02-15P
Part No.: M2501RF-xx-N0

Pin位数

Circuits	Dimension mm			Circuits	Dimension mm		
	A	B	C		A	B	C
2	2.50	7.50	6.00	10	22.50	27.50	26.00
3	5.00	10.00	8.50	11	25.00	30.00	28.50
4	7.50	12.50	11.00	12	27.50	32.50	31.00
5	10.00	15.00	13.50	13	30.00	35.00	33.50
6	12.50	17.50	16.00	14	32.50	37.50	36.00
7	15.00	20.00	18.50	15	35.00	40.00	38.50
8	17.50	22.50	21.00	–	–	–	–
9	20 00	25 00	23 50				

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	2.50mm Crimp Style Connectors
PART. NO.	M2501RF-xx-N0

SHEET	1/1
DATE	2010. 4. 12
UNITS	mm
SCALE	1:1
DWG NO.	009