
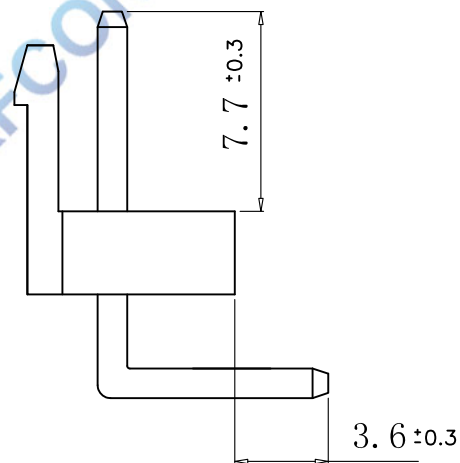
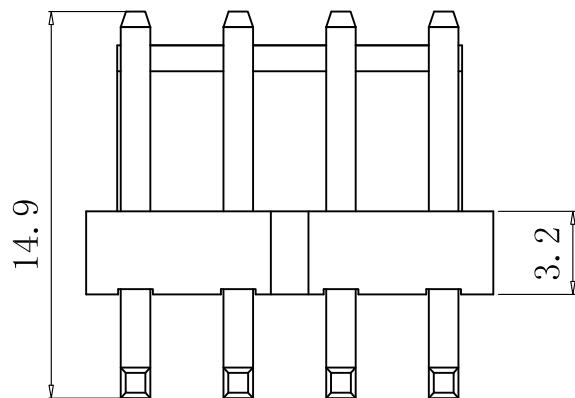
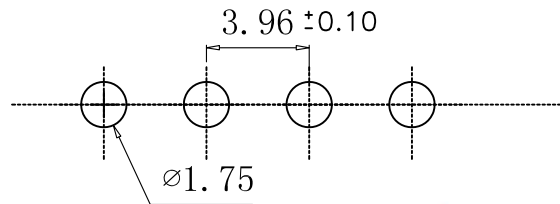


环保物料

TEL: 0769-82001899

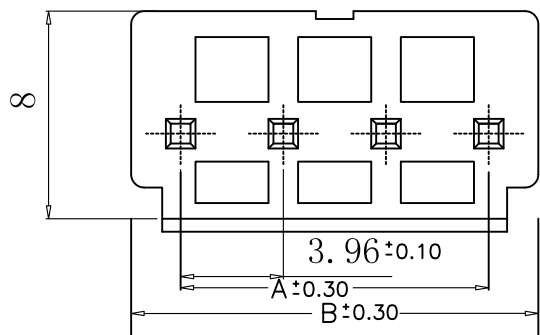

SPECIFICATIONS

1. Voltage rating: 250V AC, DC
 2. Current rating: 7A, AC, DC
 3. Withstanding Voltage: 1500V AC/minute
 4. Insulation resistance: 1000M min
 5. Temperature range: -25 ° C - +85 ° C
 6. Contact resistance: 10m max
- WAFER

Housing Material: Nylon66 UL 94V0
 Pin Material: Phosphor Bronze or Brass
 Contact Area Plating: Plated Tin or Plated Gold
 Mates with :P3960 series Housing
 Poles: 02-16P
 Part No.: M3960R-xx-N0

Pin位数

Contact	Dimensions	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.8
06	19.8	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.6
11	39.6	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.4
16	59.4	63.35

WWW.XFCNN.COM

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	3.96mm Crimp Style Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	M3960R-XX-N0	
				.XXX	±0.03	.XXX°	±0.5°			UNITS	mm
										SCALE	1:1
										DWG NO.	009
A0	MODIFICATION		DRAW	DATE							