



MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:  
 1. HOUSING: SEE NOTES, UJ94V-0.  
 TERMINAL: SEE NOTES.  
 SHELL: SEE NOTES.

SPECIFICATION:

- ELECTRICAL CHARACTERISTIC:  
 CONTACT RESISTANCE: 30MΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
 INSULATION RESISTANCE: 1000MΩ MIN
- MECHANICAL CHARACTERISTIC:  
 INSERTION FORCE: 35N(3.57KGF) MAX  
 EXTRACTON FORCE: 10~35N(1.02~3.57KGF)MIN  
 DURABILITY: 1500 CYCLES EXTRACTON FORCE: 10~35N  
 5000 CYCLES MIN  
 5000 CYCLES EXTRACTON FORCE: 3~35N
- ENVIRONMENTAL:  
 OPERATING TEMPERATURE: -55°C+85°C
- Contact finish:

- Selective Gold Flash
- Selective Gold 3U"
- Selective Gold 5U"
- Selective Gold 15U"
- Selective Gold 30U"

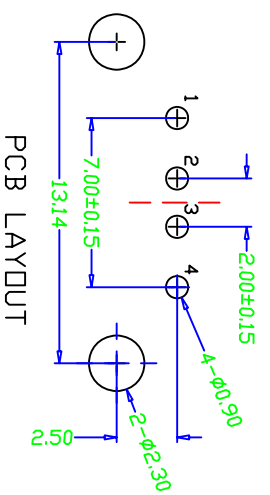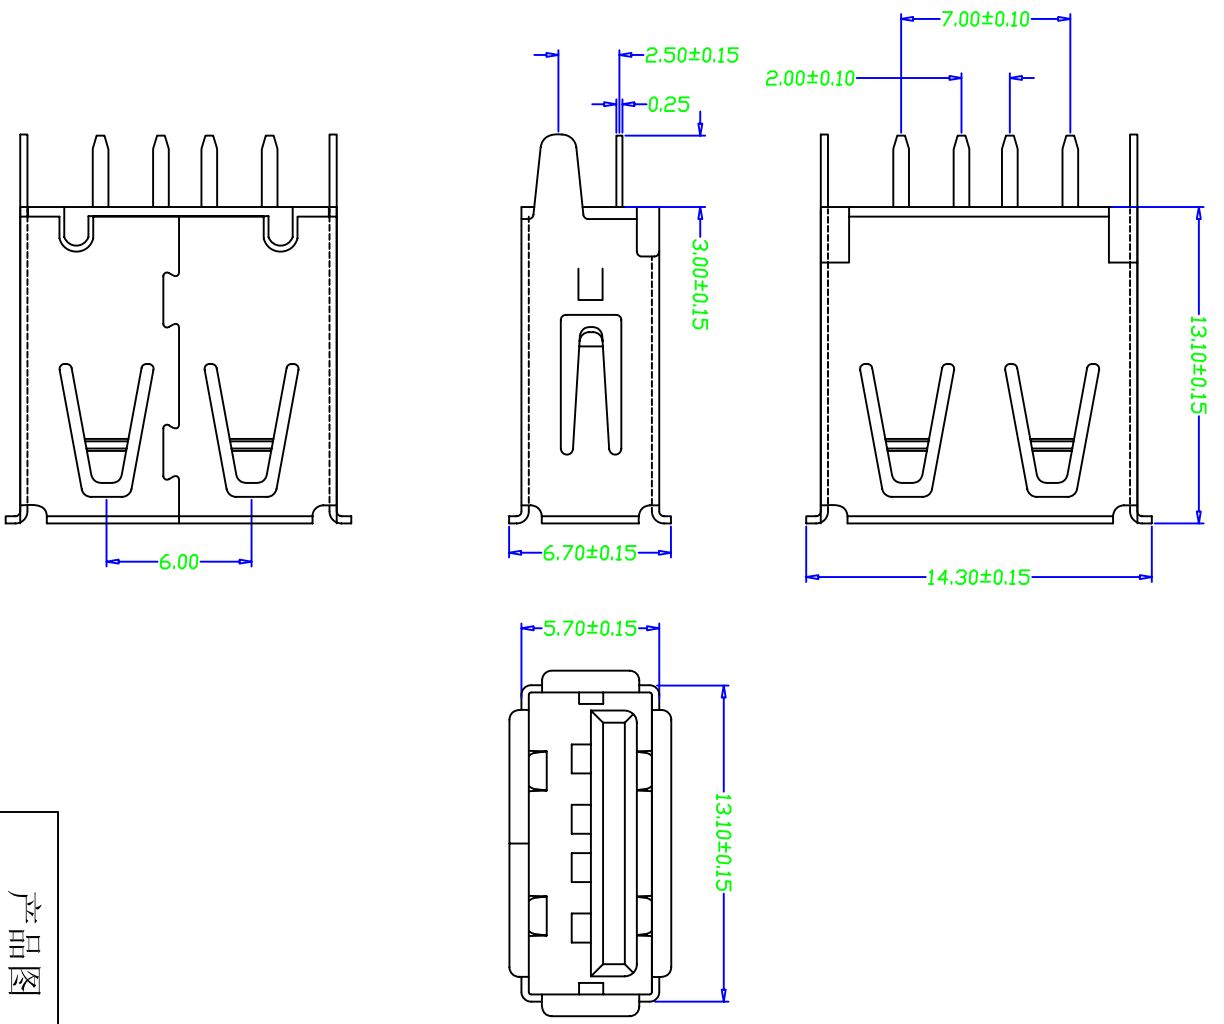

# 深圳市精拓金电子有限公司

产品图		制图		制图料号	
PRODUCT CHART DWG		DRAWING		PRODUCT PART NO.	
公差一览表		单位	MM		
TOLERANCE UNLESS OTHERWISE	±5°	UNITS			
X. ±0.25	X.	SCALE	1:1		
X. ±0.20	X.	DATE	2014.07.24		
XX. ±0.15	XX.	审核	核准		
XXX. ±0.10	XXX.	APPD			
	±0.5°	角法			
		版本			
		VER			
		AD			