
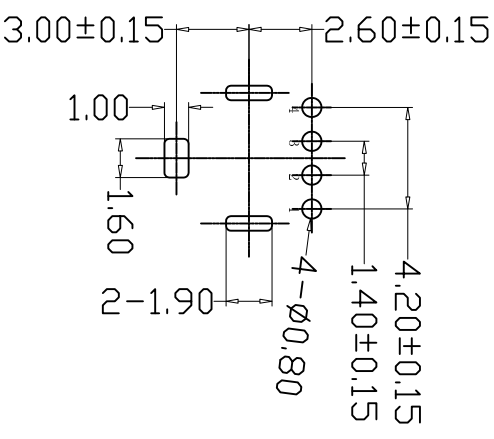


MAPX	MODIFICATION	DATE
------	--------------	------

Specification:

- 1. Electrical Characteristics:
 - Dielectric Withstanding Voltage: AC 500V/1MINUTE.
 - Insulation Resistance: 1000 MΩ/Min.
 - Contact Resistance: 30 mΩ Max.
- 2. Mechanical Characteristics:
 - INSERTION FORCE: 30N(3.06kgf) MAX
 - EXTRACTION FORCE: 10.30N(1.023.06kgf)
 - Durability: 1500cycles. EXTRACTION FORCE: 10.30N(1.023.06kgf)
- 3. Material:
 - Terminal: Phosphor Bronze, C2680R-BH T-50.25
 - Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel
 - underplate, 2.54 um Min Sn selective plating on solder tail:
- 4. Environmental:
 - Shell: Bronze, SPCCR-H = 0.30mm
 - Plating: Nickel underplate 2.54 um Min;
 - Housing: PBT white
 - Operating Temperature: 0° C to +85° C.

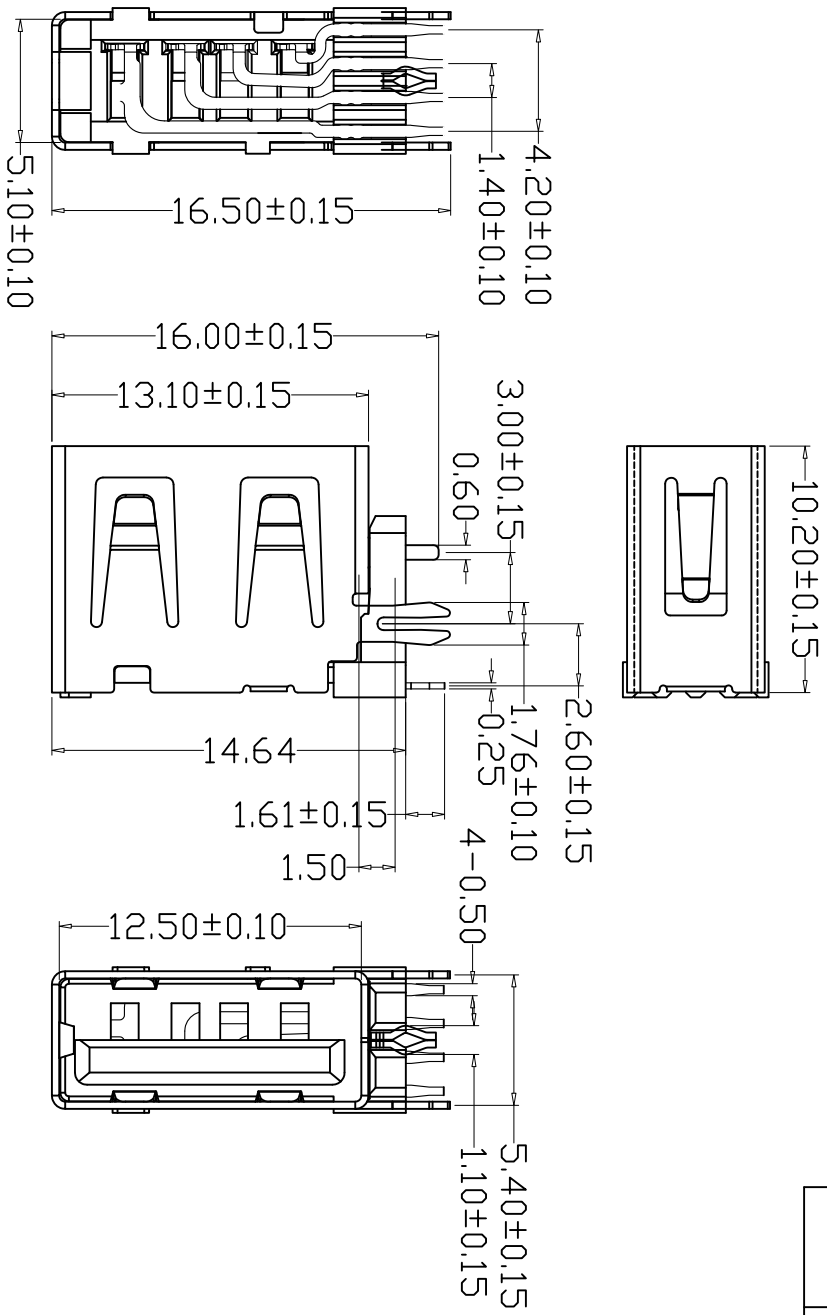

产品图
PRODUCT CHART DMC

深圳市精拓金电子有限公司

公差一览表 TOLERANCE (UNLESS OTHERWISE SPECIFIED)		单位 UNITS	MM	制图 DRAWING	Z-Y-B	制料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	加高 1.5	版本 VER	AO
X.	±0.25	X.	±5.°	审核		AF10.0	脚插短体鱼叉内O型脚无法成品			
X	±0.20	X	±2.°	日期	2014.02.20	核准				
.XX	±0.15	.XX	±1.°	DATE						
.XXX	±0.10	.XXX	±0.5°							