


MAPX	MODIFICATION	DATE

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V
- Insulation Resistance:1000M Ω Min.
- Contact Resistance:30 M Ω Max.
- Dielectric Withstanding Voltage:500W
- Temperature Range:-55° C to +85° C
- Insulator color: Black/White
- Plastic material:PBT/LCP
- Shell finish:Nickel plated/Tin-Lead plate
- Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U”
 - 03:Selective Gold 5U”
 - 04:Selective Gold 15U”
 - 05:Selective Gold 30U”

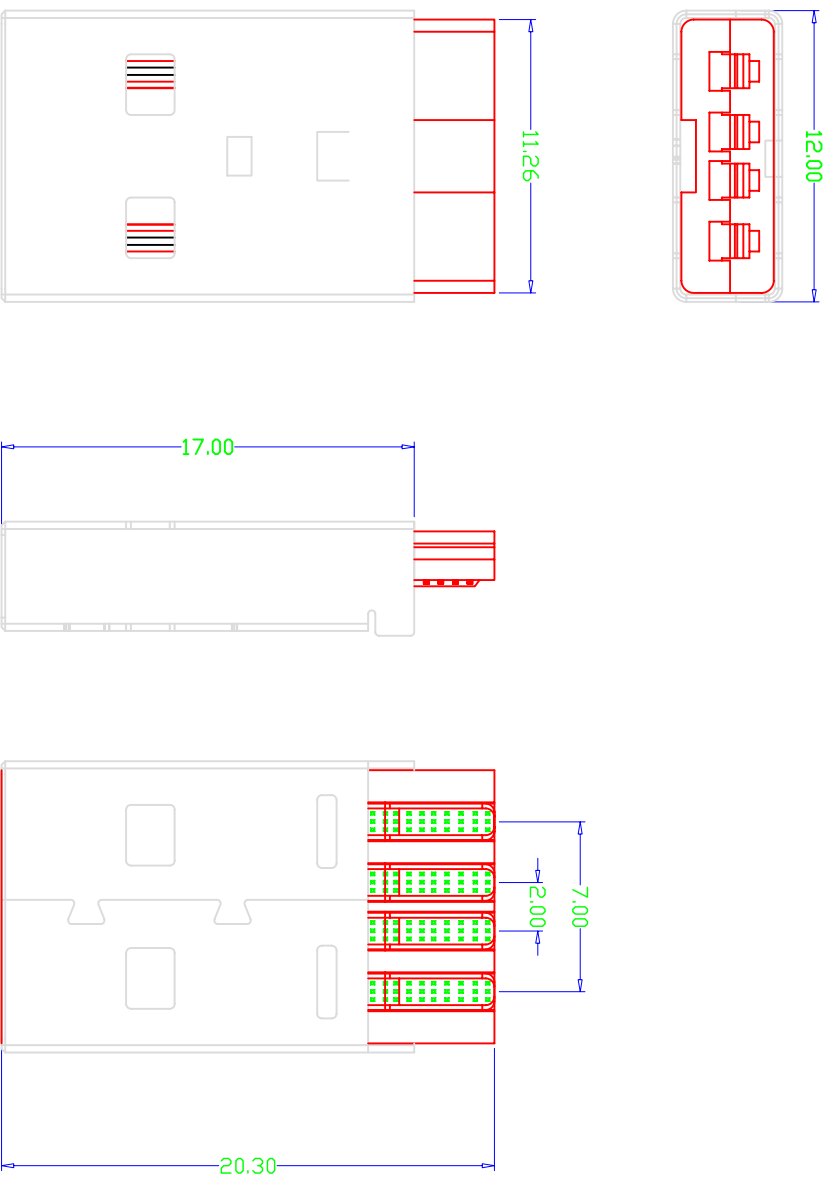

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表		单位	MM	制图	Z-Y-B	制图料号
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.
X	±0.25	X	±5.°	审核		产品名称
X	±0.20	X	±2.°	CHRD		PRODUCT NO.
.XX	±0.15	.XX	±1.°	核准		USB A/M前壳17.0 (C款)
.XXX	±0.10	.XXX	±0.5°	APPR		角法
		DATE	2012.12.25			版本
						VER
						A0