

MAPX	MODIFICATION	DATE
------	--------------	------

Specifications:


- Electrical:
- 1.Current Rating 1.5A/contact terminal
  - 2.Voltage Rating : 30V DC
  - 3.Contact Resistance: 30 milliohms MAX
  - 4.Dielectric Withstanding Voltage: 500 V AC AT Sea Level
  - 5.Insulation Resistance: 1000MEGA ohms MIN
- Mechanical:
- 1.Connector Mate and Unmate Force:  
Mate force: 3.75kgf(MAX)  
Unmate force: 0.40kgf(MIN)
  - 2.Terminal Retention : 0.40kgf(MIN)

Material:

- 1.Housing:  
Hing Temperature Ternmaplastics,  
UI 94V-0 LCP White/Black
- 2.Contact: Copper Alloy C2680
- 3.Shell: Copper Alloy C2680/SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area; Tin On Solder Tails
- 2.Shell: Nickel Plating

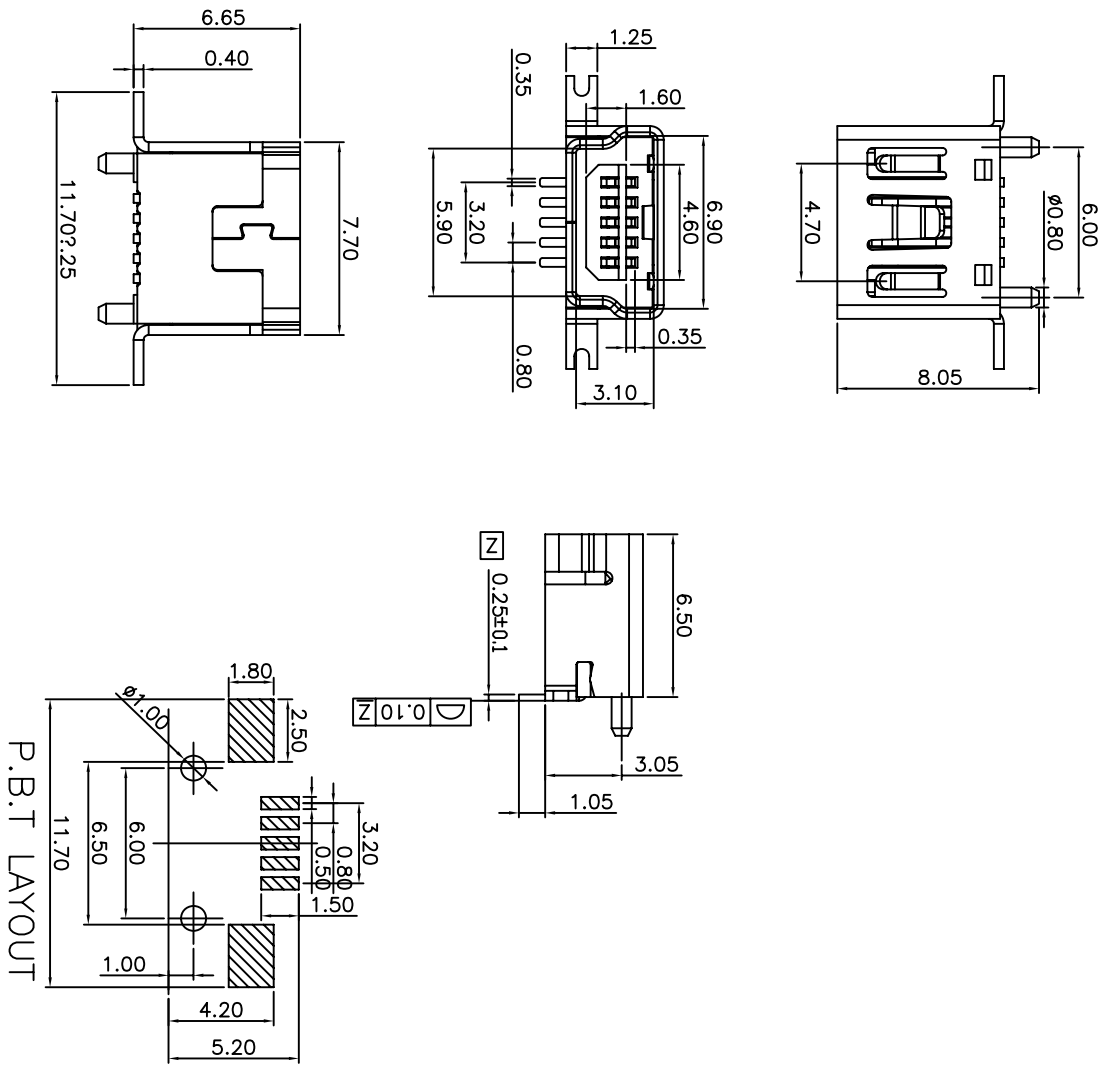

# 深圳市精拓金电子有限公司

产品图  
PRODUCT CHART DWG

公差一览表		公差一览表	
TOLERANCE	UNLESS OTHERWISE	TOLERANCE	UNLESS OTHERWISE
X	±0.15	X	±5°
X	±0.10	X	±2°
XX	±0.05	XX	±1°
XXX	±0.03	XXX	±0.5°

单位	MM	制图	许榕强	制料号	
UNITS	MM	DRAWING	许榕强	PRODUCT PART NO.	
比例	1:1	审核	郭治富	产品名称	
SCALE	1:1	CHKD	郭治富	PRODUCT NO.	
日期	2016-09-09	核准	黄国荣	MINI USB SPIN/F SMT 立贴	
DATE	2016-09-09	APPR	黄国荣	角法	
				VER	版本
				AD	AD