
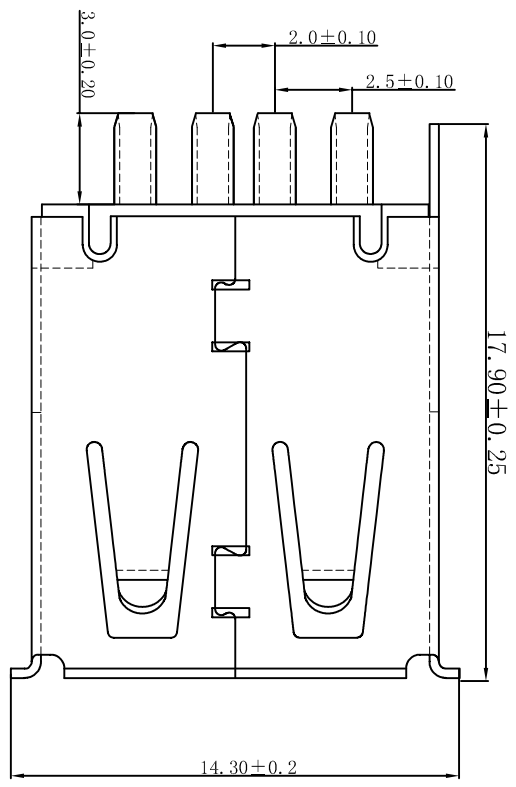
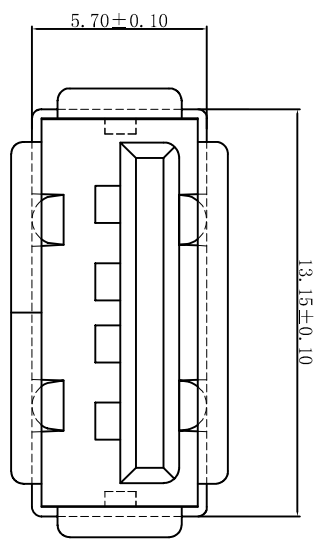


MAPX	MODIFICATION	DATE
------	--------------	------

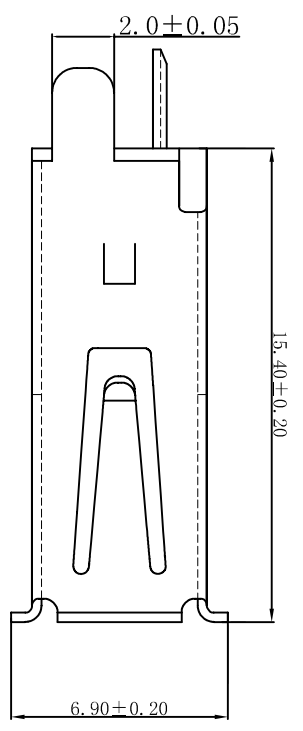

Note:

1. Material:
 - 1.1 Housing: PBT+G. F., UL94V-0
 - 1.2 Contact: Stainless steel
 - 1.3 Shell: Iron: Nickel plating for front cover, tinning for back cover
2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 500 MΩ Min.
 - 2.5 Total mating force: 3.57 KgF Max.
 - 2.6 2500 insertion/extraction cycles
 - 2.7 Temperature range: -30° C~80° C

深圳市精拓金电子有限公司

产品图
PRODUCT CHART DWG

公差一览表		单位	制图	制图料号
TOLERANCE UNLESS OTHERWISE	UNITS	MM	DRAWING	PRODUCT PART NO.
X	±0.15	X	审核	JTJ11006-FL-0-N
X	±0.10	X	审核	产品名称
.XX	±0.05	.XX	核准	角法
.XXX	±0.03	.XXX	APPD	版本
		日期		AO
		2014.07.10		

