
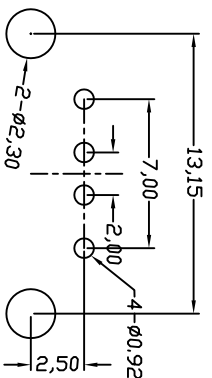
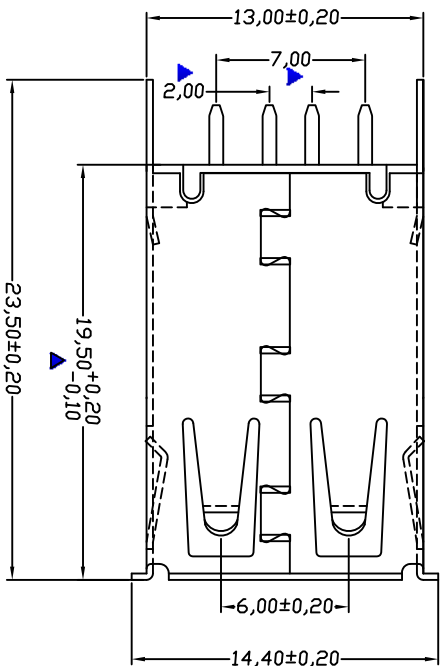
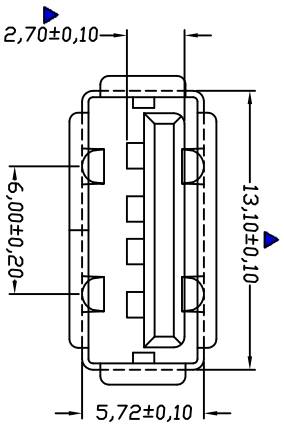
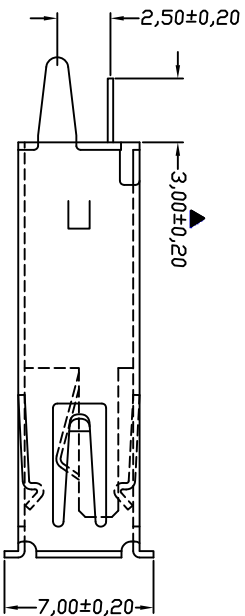


MAPX	MODIFICATION	DATE
------	--------------	------

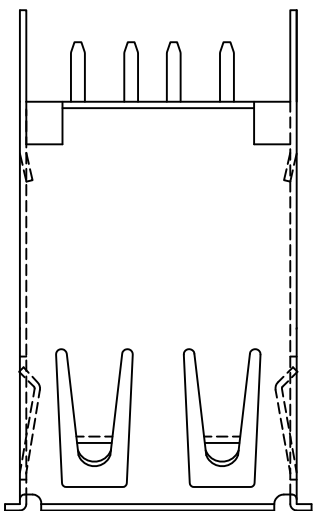

P.C.B. Layout

产品规格说明: (Specifications)
电器特性: (Electrical characteristics)

- 接触阻抗: (Contact Resistance)
最大值30毫欧: (30 milliohms MAX)
- 耐电压: (Dielectric Withstanding Voltage):
500 伏特交流电 (500V AC AT Sea Level)
- 绝缘阻抗: (Insulation Resistance):
最小值1000兆欧姆 (1000 mega-ohms MIN)

机械性能: (Mechanical:)

- 插入力: (Insertion Force)
最大3.57kg (3.57kg MAX)
最少1.02kg (1.02 kg MIN)
- 拔出力: (Unmating Force:)

材料: (Material):

- 塑胶: (Housing) : PBT白色防火
- 端子: (Contact): T0.25磷铜
- 外壳: (Shell) : 10.3 黄铜

电镀: (Finish):
1. 端子(Contact): Au Plated 0N Contact Area Over 60~80u Ni, Sn Plated On Solder Tails.
接触点镀金 15u'' 脚镀锡。

2. 外壳: (Shell): Nickel Plating 镀亮镍100u''

2. 所有物料均须符合RoHS标准。

深圳市精拓金电子有限公司

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X	±0.15	X	±5°
X	±0.10	X	±2°
XX	±0.05	XX	±1°
XXX	±0.03	XXX	±0.5°

单位 UNITS	MM	制图 DRAWING	许密强	制料号 PRODUCT PART NO	AF USB180度19.6正向
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO	
日期 DATE	2016-09-09	核准 APRD	黄国荣	角法 VIEW	版本 VER
					AD