


MAPX	MODIFICATION	DATE
------	--------------	------

Specifications:

- 1.Current Rating:1.0A at 30V AC.
- 2.Withstanding Voltage:
500V AC for one minute.
- 3.Insulation Resistance:1000MΩ Min.
- 4.Contact Resistance:30mΩ Max.
- 5.Mating Force:3.57kgf Max.
- 6.Ummating Force:1.02kgf Min.

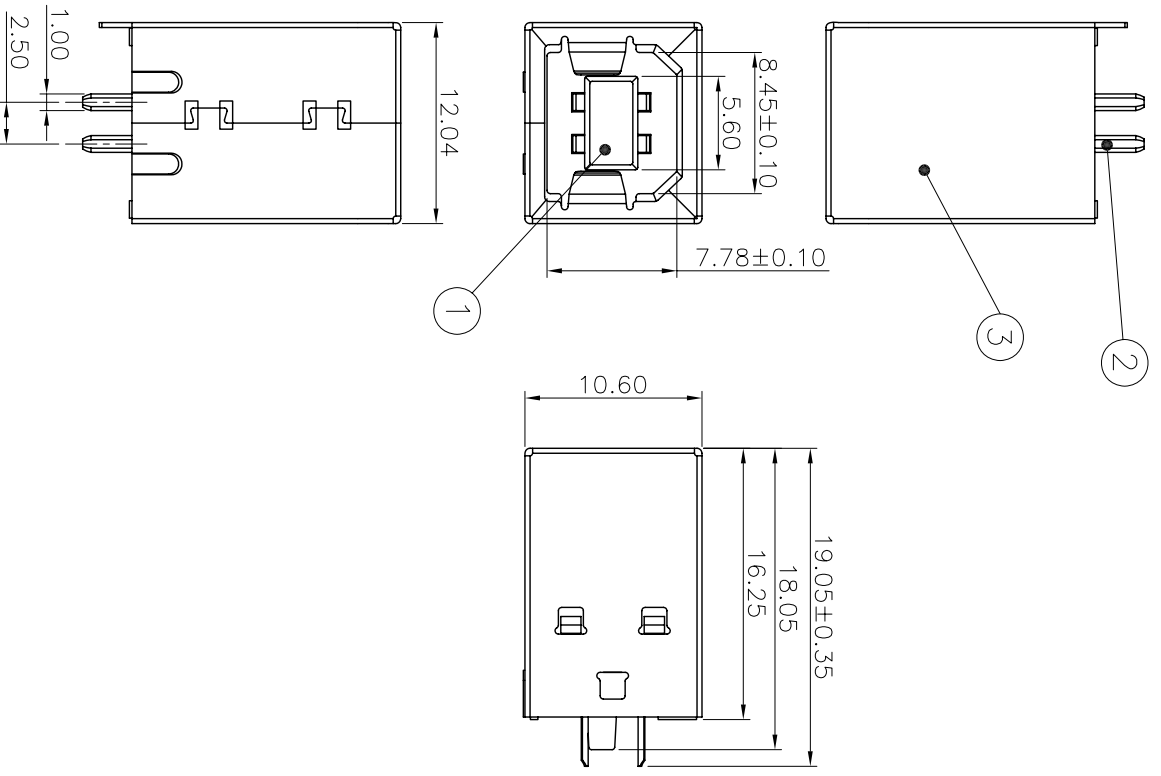

3	外壳	SPCC	—	NICKEL/GOLD PLATED
2	端子	C5191	—	GOLD/TIN PLATED
1	胶芯	PBT	WHITE/BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG 公差—一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS MM	制图 DRAWING Gavin	制图料号 PRODUCT PART NO.
X	±0.35	X	±5°	产品名称 PRODUCT NO. USB BF 180度焊线式(焊杯长款)
X	±0.30	X	±2°	
XX	±0.20	XX	±1°	
XXX	±0.10	XXX	±0.5°	
日期 DATE	比例 SCALE	审核 CHKD	核准 APPD	角法 VIEW
2016-09-09	1:1	郭治富	黄国荣	版本 VER AD

1 2 3 4 5 6 7 8 9 10

A B C D E F G