


- NOTES:
1. HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.
 2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
 3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°C+85°C
 4. Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"



深圳市精拓金电子有限公司

产品图		公差一览表		制图料号	
PRODUCT CHART DWG		TOLERANCE UNLESS OTHERWISE		Z-Y-B	
X	±0.25	X	±5°	UNIT	MM
X	±0.20	X	±2°	SCALE	1:1
XX	±0.15	XX	±1°	DATE	2014.02.14
XXX	±0.10	XXX	±0.5°	DATE	2014.02.14
		制图	审核	制图料号	PRODUCT PART NO.
		DRAWING	CHKD	产品名称	PRODUCT NO.
		DATE	APPR	角法	角法
				版本	版本
				VER	VER
				AD	AD

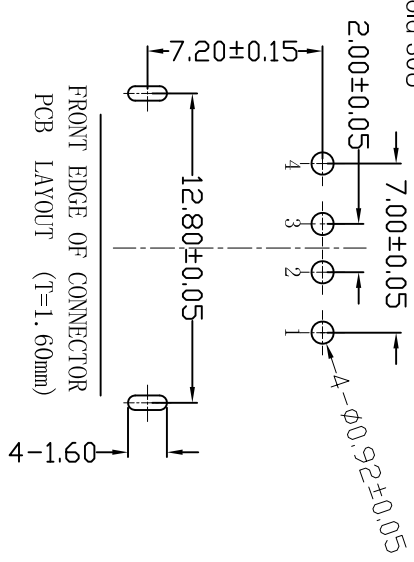