

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C


Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

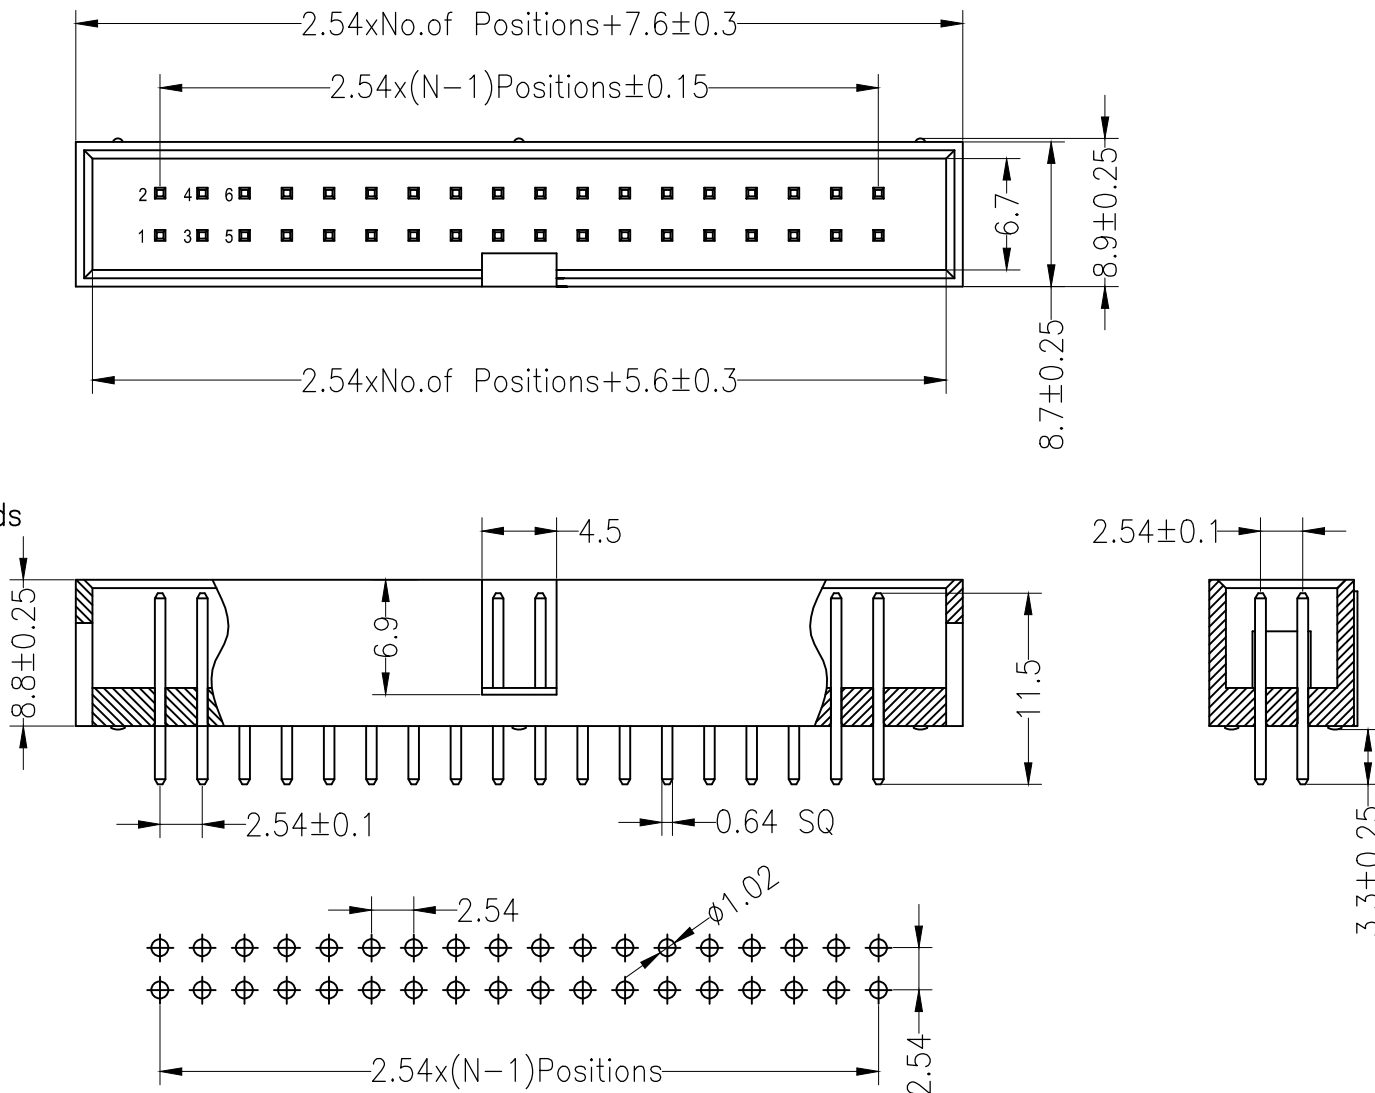

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

				OPERATION		DRAW		SCALE	FIT	深圳市连盛精密连接器有限公司		
				X.X	± 0.30			UNIT	mm			
				X.XX	± 0.20	CHECK		SIZE	A4	PART NO.		BH-00191
A0	2012.03.28	NEW DRAWING		X.XXX	± 0.10			SHEET	1/1	TITLE:		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	$\pm 3^\circ$	APPROVE	PROJ.				
1	2	3	4	5	DIM	TOL	6	7	8	9		