

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass


Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0) Black




Max.Processing Temp: 230°C for 30-60 seconds

(260°C for 10 seconds)

SQ PIN:0.64x12.9mm & 0.64x12.5mm



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

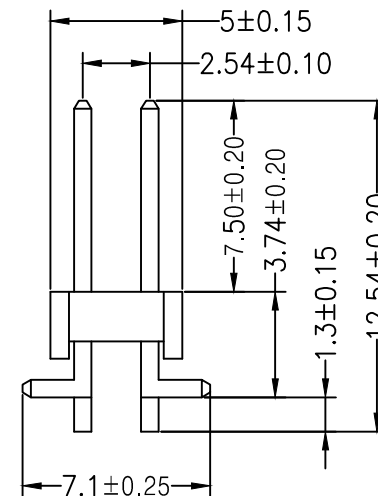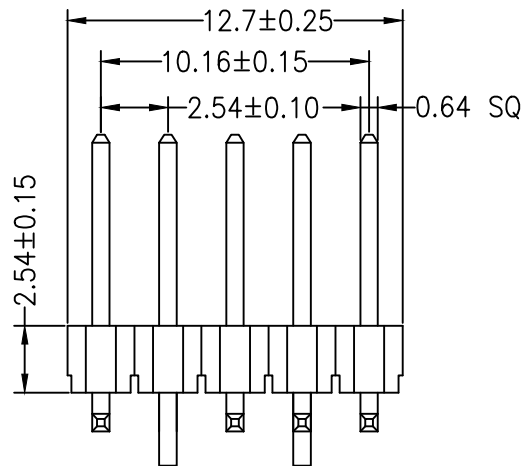

OPERATION

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

DRAW

CHECK

APPROVE

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

深圳市连盛精密连接器有限公司

PART NO.

PH-00229

TITLE:

2.54PH H=2.5 2x5P (3, 8脚定位)
SMT=7.1 PA7.5 PB3.74

A0	2012.03.28	NEW DRAWING							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE					

1

2

3

4

5

6

7

8

9