
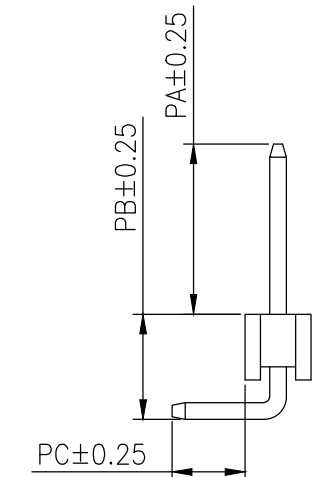
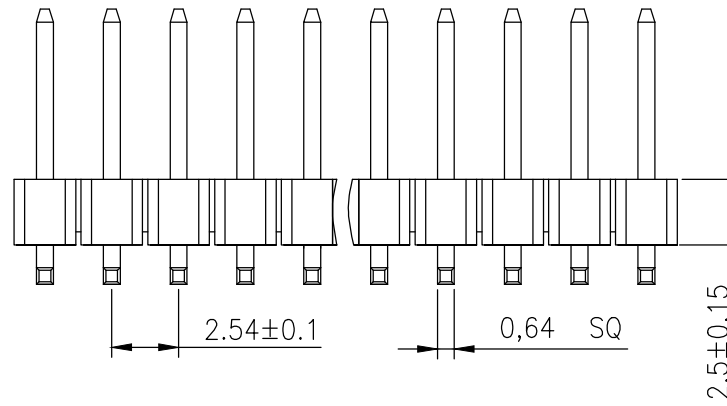
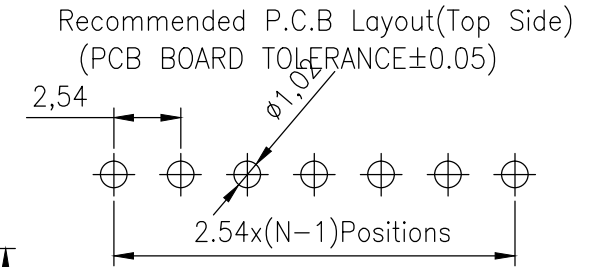


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

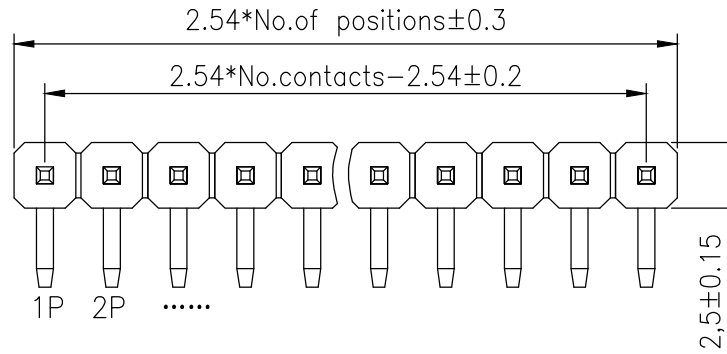

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	4.30	3.00	13.80
Alternate				

OPERATION		DRAW	SCALE	FIT
X.X	±0.30			
X.XX	±0.20	CHECK	UNIT	mm
X.XXX	±0.10		SIZE	A4
Angle	±3°	APPROVE	SHEET	1/1
DIM	TOL		PROJ.	☉

深圳市连盛精密连接器有限公司

PART NO.	PH-01230
TITLE:	2.54PH 2.5mm 1X40 90°正弯

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.07.02	NEW DRAWING	