


技术参数 SPECIFICATIONS

- 线数 (Poles) : 2~13、15
- 适用线规 (Applicable wires) : AWG26#~18#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 7.5A
- 接触电阻 (Contact resistance) : $\leq 0.015\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1500V.Ac/min
- 材料 (Material) :
 - 孔座 (Housing) : 尼龙 (PA66) UL94V-2(0)
 - 针座 (Wafer) : 尼龙 (PA66) UL94V-2(0)
 - 锁片 (Retainer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (PHos.bronze Tin/plated)


端子 TERMINAL(VH)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm	数量 Quantity
	mm ²	AWG#		
HX39600-01PT	0.12~0.35	26~22	1.2~1.8	3000PCS/盘
HX39600-PT	0.33~0.83	22~18	1.7~3.0	3000PCS/盘


HX39600-PT(VH)




HX39600-Y(VH)




HX39600-HS(VH)




安装尺寸 MOUNTING MEASUREMENT

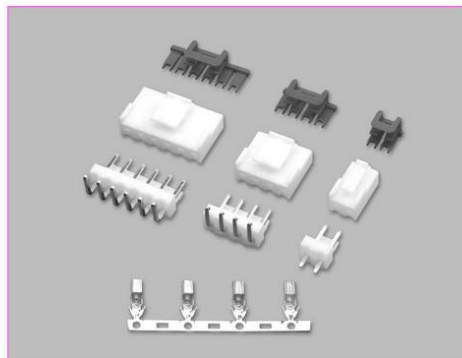


HX39601-A(VH)



HX39601-WAP(VH)



HX39601-WAG(VH)



孔座 HOUSIN(VH)

线数 Poles	型号 Type	尺寸 Dimensions(mm)			
		A	B	C	D
2	HX39600-2Y HX39600-2HS	3.96	8.06	6.85	7.95
3	HX39600-3Y HX39600-3HS	7.92	11.92	10.7	11.80
4	HX39600-4Y HX39600-4HS	11.88	15.88	10.7	15.76
5	HX39600-5Y HX39600-5HS	15.84	19.84	10.7	19.72
6	HX39600-6Y HX39600-6HS	19.80	23.80	10.7	23.68
7	HX39600-7Y HX39600-7HS	23.76	27.76	10.7	27.64
8	HX39600-8Y HX39600-8HS	27.72	31.72	10.7	31.60
9	HX39600-9Y HX39600-9HS	31.68	35.68	10.7	35.56
10	HX39600-10Y HX39600-10HS	35.64	39.64	10.7	39.52
11	HX39600-11Y HX39600-11HS	39.60	43.60	10.7	43.48
12	HX39600-12Y HX39600-12HS	43.56	47.56	10.7	47.44
13	HX39600-13Y	47.52	51.52	—	—
15	HX39600-15Y	55.44	59.44	—	—

针座 WAFER(VH)

线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
2	HX39601-2A HX39601-2WA	3.96	7.92
3	HX39601-3A HX39601-3WA	7.92	11.88
4	HX39601-4A HX39601-4WA	11.88	15.84
5	HX39601-5A HX39601-5WA	15.84	19.80
6	HX39601-6A HX39601-6WA	19.80	23.76
7	HX39601-7A HX39601-7WA	23.76	27.72
8	HX39601-8A HX39601-8WA	27.72	31.68
9	HX39601-9A HX39601-9WA	31.68	35.64
10	HX39601-10A HX39601-10WA	35.64	39.60
11	HX39601-11A HX39601-11WA	39.60	43.56
12	HX39601-12A HX39601-12WA	43.56	47.52
13	HX39601-13A HX39601-13WA	47.52	51.48
15	HX39601-15A HX39601-15WA	55.44	59.40