

HARTING Connectors



Pushing Performance


HAR-FLEX® STRAIGHT PCB CONNECTORS

Features:

- Optimized utilization of PCB real estate due to flexibility in choice of contact count
- High contact density for reduced footprint
- Robust design
- Suitability for automated processing
- Flexible PCB clearances



RoHS Compliant

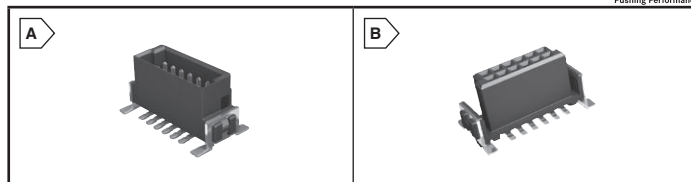

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	HARTING Part No.	Fig.	No. of Pos.	Price Each			
				1	50	100	250
Male 1.75 Stack Height							
617-15110062601000	15 11 006 2601 000	A	6				
617-15110122601000	15 11 012 2601 000	A	12				
617-15110162601000	15 11 016 2601 000	A	16				
617-15110202601000	15 11 020 2601 000	A	20				
617-15110262601000	15 11 026 2601 000	A	26				
617-15110322601000	15 11 032 2601 000	A	32				
617-15110402601000	15 11 040 2601 000	A	40				
617-15110502601000	15 11 050 2601 000	A	50				
617-15110682601000	15 11 068 2601 000	A	68				
617-15110802601000	15 11 080 2601 000	A	80				
617-15111002601000	15 11 100 2601 000	A	100				
Male 3.25 Stack Height							
617-15120062601000	15 12 006 2601 000	A	6				
617-15120122601000	15 12 012 2601 000	A	12				
617-15120162601000	15 12 016 2601 000	A	16				
617-15120202601000	15 12 020 2601 000	A	20				
617-15120262601000	15 12 026 2601 000	A	26				
617-15120322601000	15 12 032 2601 000	A	32				
617-15120402601000	15 12 040 2601 000	A	40				
617-15120502601000	15 12 050 2601 000	A	50				
617-15120682601000	15 12 068 2601 000	A	68				
617-15120802601000	15 12 080 2601 000	A	80				
617-15121002601000	15 12 100 2601 000	A	100				

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	HARTING Part No.	Fig.	No. of Pos.	Price Each			
				1	50	100	250
Female 6.25 Stack Height							
617-15210062601000	15 21 006 2601 000	B	6				
617-15210122601000	15 21 012 2601 000	B	12				
617-15210162601000	15 21 016 2601 000	B	16				
617-15210202601000	15 21 020 2601 000	B	20				
617-15210262601000	15 21 026 2601 000	B	26				
617-15210322601000	15 21 032 2601 000	B	32				
617-15210402601000	15 21 040 2601 000	B	40				
617-15210502601000	15 21 050 2601 000	B	50				
617-15210682601000	15 21 068 2601 000	B	68				
617-15210802601000	15 21 080 2601 000	B	80				
617-15211002601000	15 21 100 2601 000	B	100				
Female 9.05 Stack Height							
617-15220062601000	15 22 006 2601 000	B	6				
617-15220122601000	15 22 012 2601 000	B	12				
617-15220162601000	15 22 016 2601 000	B	16				
617-15220202601000	15 22 020 2601 000	B	20				
617-15220262601000	15 22 026 2601 000	B	26				
617-15220322601000	15 22 032 2601 000	B	32				
617-15220402601000	15 22 040 2601 000	B	40				
617-15220502601000	15 22 050 2601 000	B	50				
617-15220682601000	15 22 068 2601 000	B	68				
617-15221002601000	15 22 100 2601 000	B	100				

HAR-MIK® SCSI (SMALL COMPUTER SYSTEM INTERFACE) I/O CONNECTORS

Features:

- Meets SCSI-3 Specifications
- Pin and Socket
- Pitch: 1.27mm
- Current rating: 1A
- Contact resistance: ≤ 30mΩ
- Temperature Range: -55°C - +105°C
- Contacts: Copper Alloy
- Moldings: Thermoplastic resin, glass fiber filled - UL94V-0



SCSI Female PCB Connectors

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	HARTING Part No.	Fig.	No. of Contacts	Term.	Pin Length (mm)	Description	Price Each			
							1	10	25	50
Straight										
617-60-01-050-5102	60 01 050 5102	A	50	Solder Pins	3.4	with latch system				
617-60-01-068-5102	60 01 068 5102	A	68	Solder Pins	3.4	with latch system				
Right Angle										
617-60-01-050-5140	60 01 050 5140	A	50	Solder Pins	3.4	with latch system				
617-60-01-068-5140	60 01 068 5140	A	68	Solder Pins	3.4	with latch system				

†† Panel fixing: M2.5, Board fixing: board lock

SCSI IDC Cable Mount Connectors

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	HARTING Part No.	Fig.	No. of Contacts	Description	Price Each			
					1	10	25	50
Male								
617-60-03-050-5200	60 03 050 5200	B	50	for discrete wire 28/30 AWG				
617-60-03-068-5205	60 03 068 5205	B	68	for discrete wire 28/30 AWG				
617-60-03-068-5215	60 03 068 5215	B	68	for discrete wire 28/30 AWG				
617-60-06-050-5440	60 06 050 5440	B	50	for flat cable, .635mm, 30 AWG				
617-60-06-068-5440	60 06 068 5440	B	68	for flat cable, .635mm, 30 AWG				
Female								
617-60-04-068-5344	60 04 068 5344	B	68	for flat cable w/ screw lock system, .635mm				

* with 0.50-0.65mm diameter insulation † with 0.65-0.80mm diameter insulation

SCSI Female SMC Right Angle Connectors

617-60110145740710	60110145740710	C	14	Bellow contacts with fixed latch				
--------------------	----------------	---	----	----------------------------------	--	--	--	--

Hoods

For quantities greater than listed, call for quote.

617-60-03-050-0255	60 03 050 0255	-	50	Metal hood with latch				
617-60-03-068-0255	60 03 068 0255	-	68	Metal hood with latch				

© Copyright 2015 Mouser Electronics

For current pricing, visit mouser.com

asia.pacific@mouser.com

© Copyright 2015 Mouser Electronics

1409

