

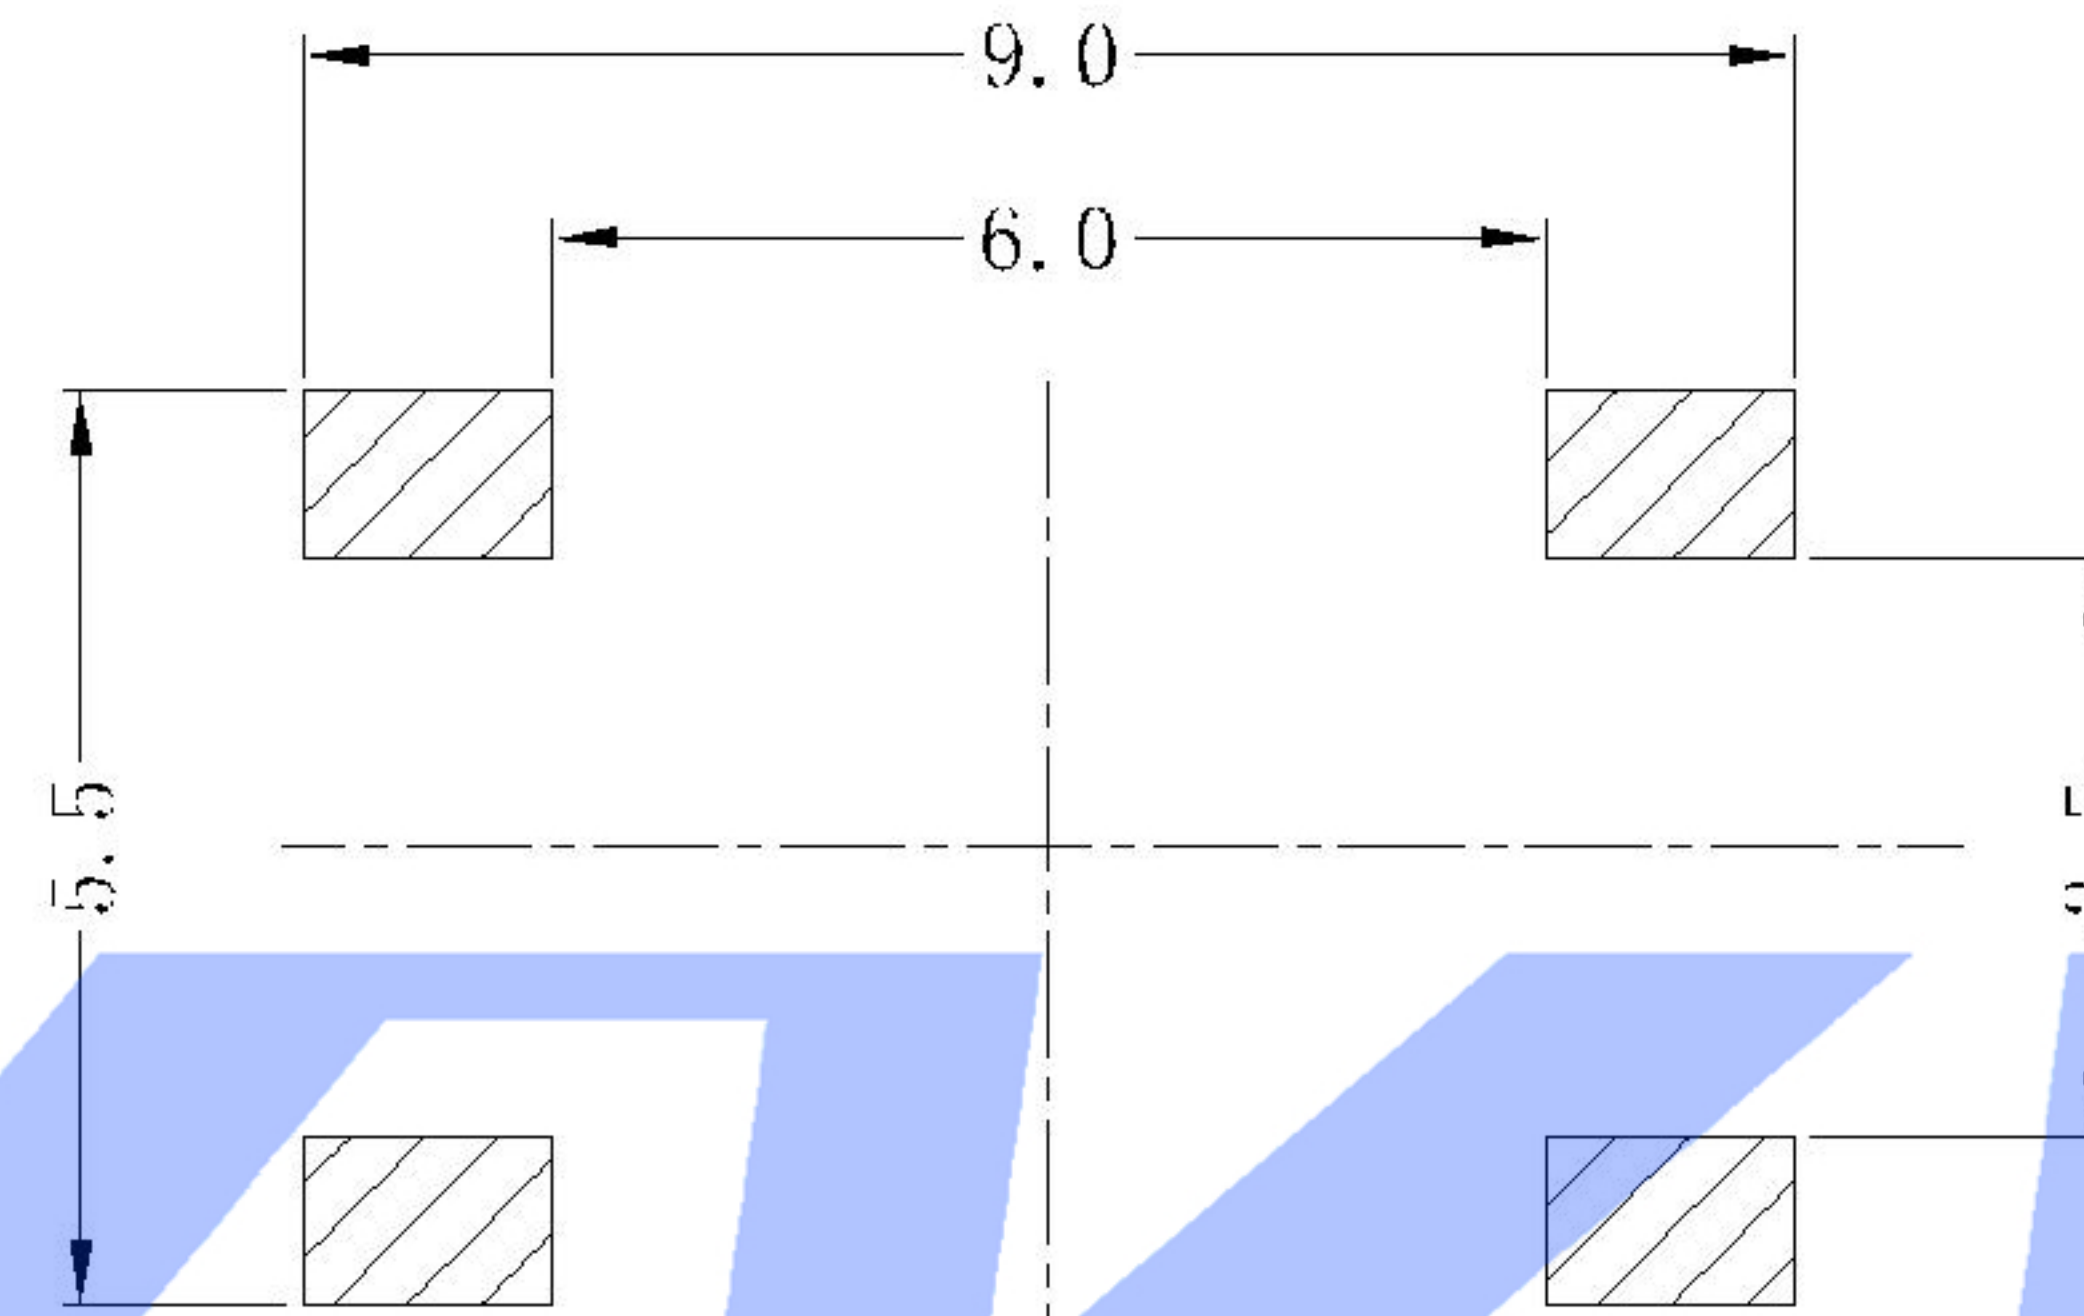


P.C.B LAYOUT
TOP VIEW

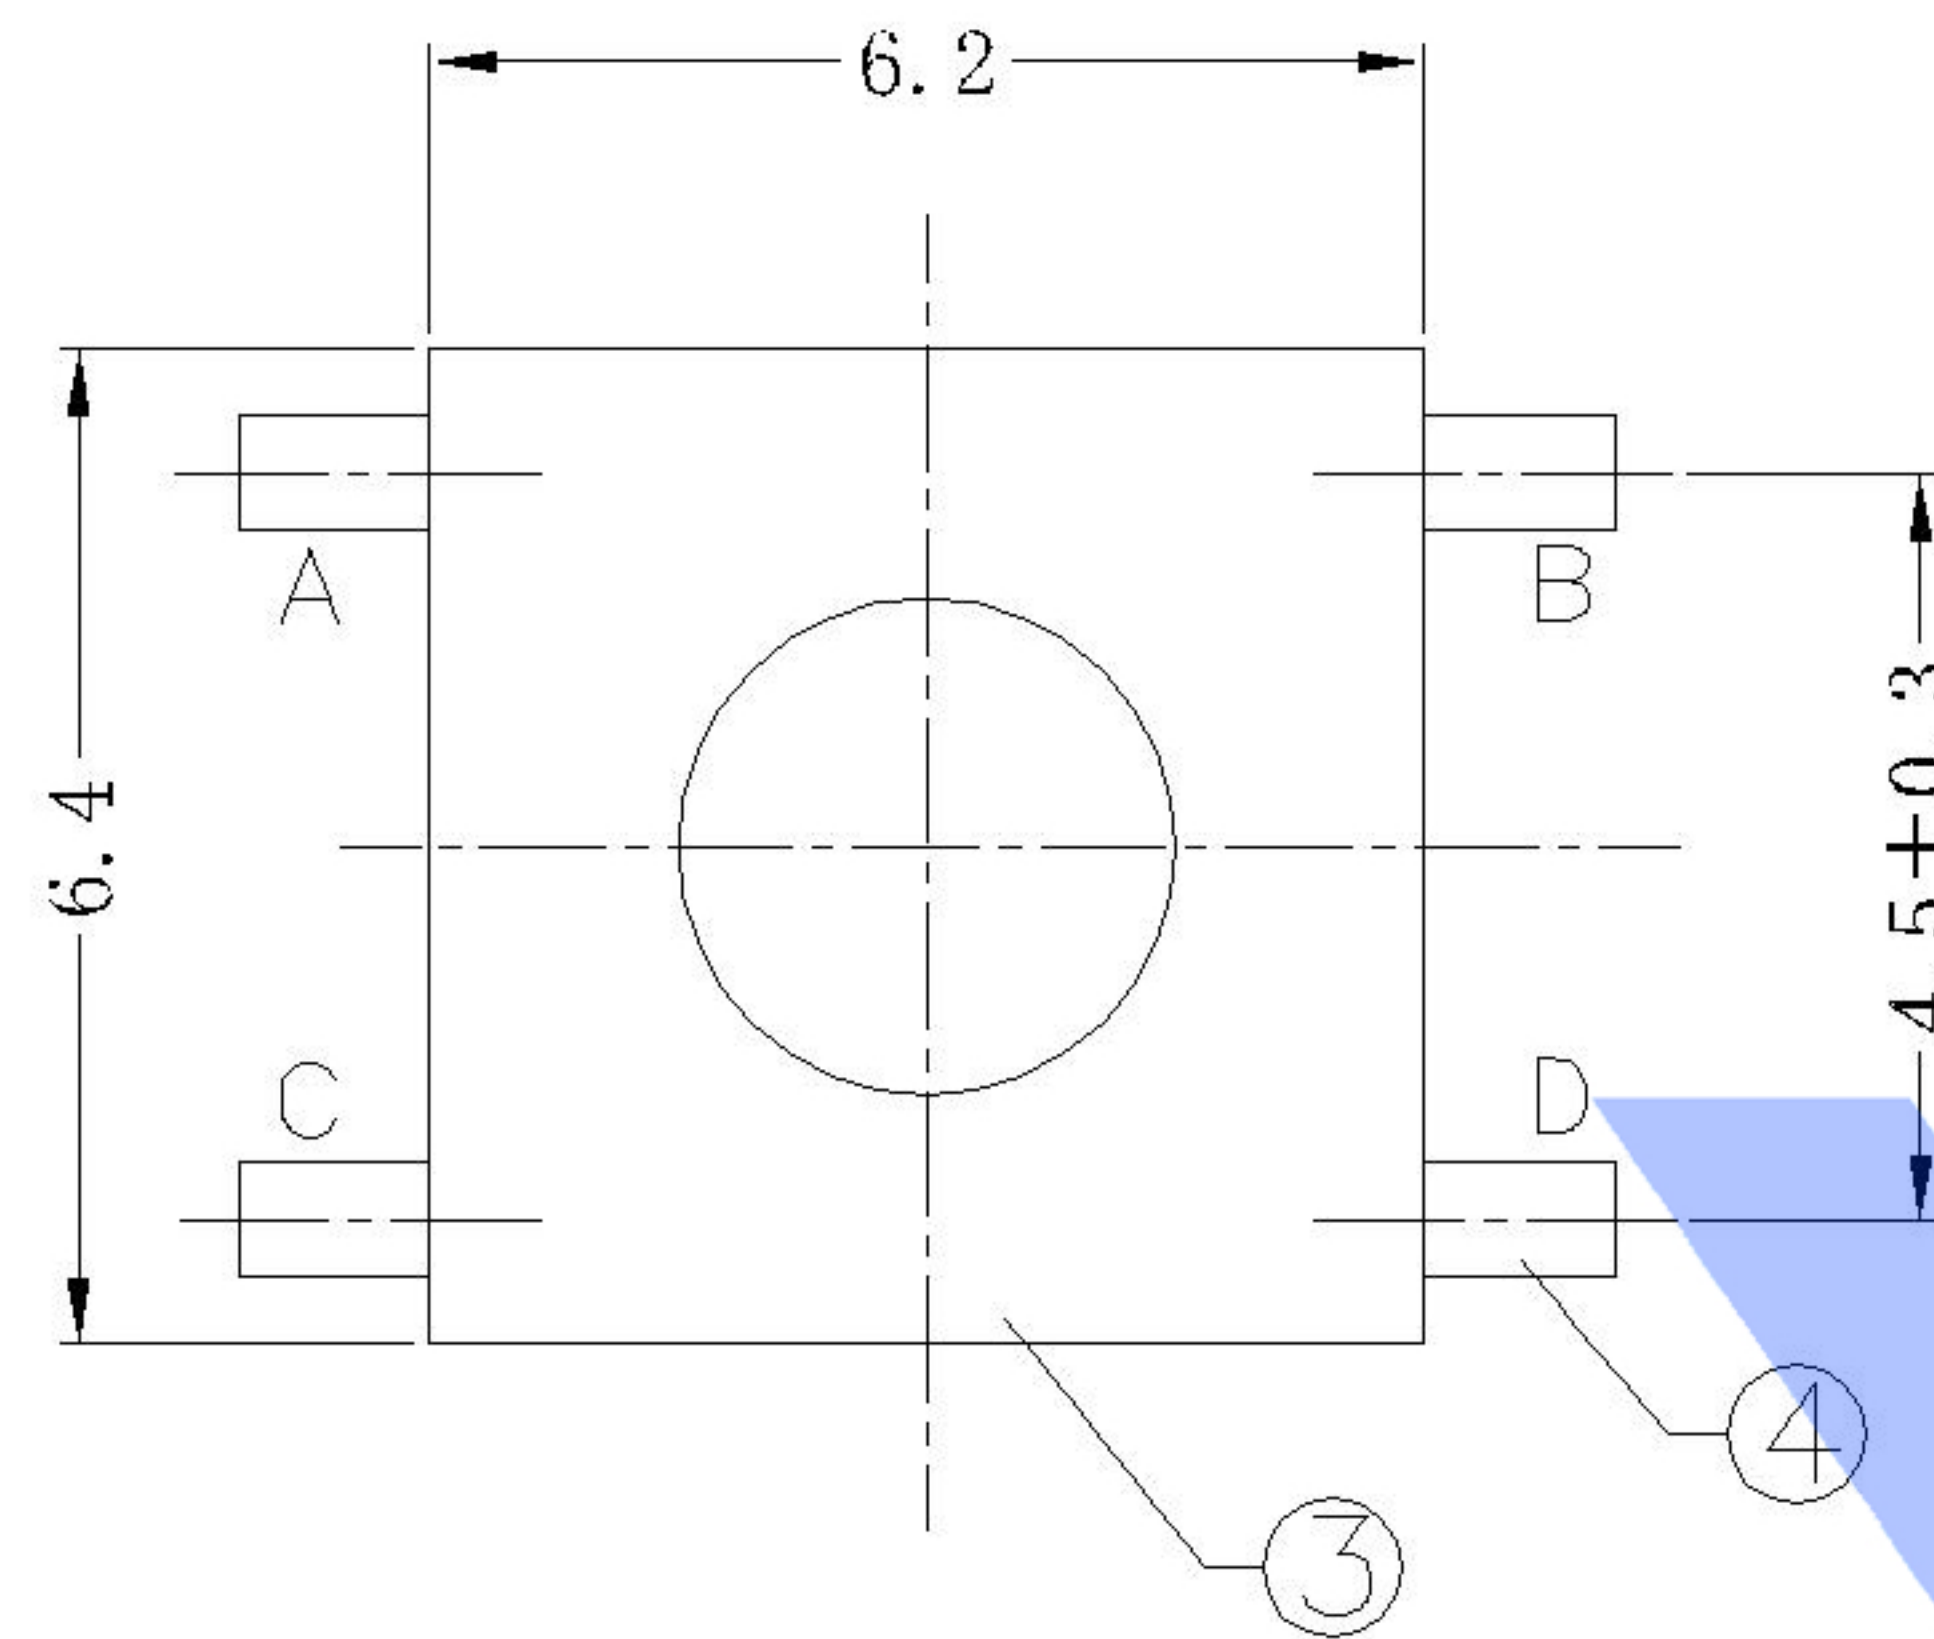


SCHEMATIC

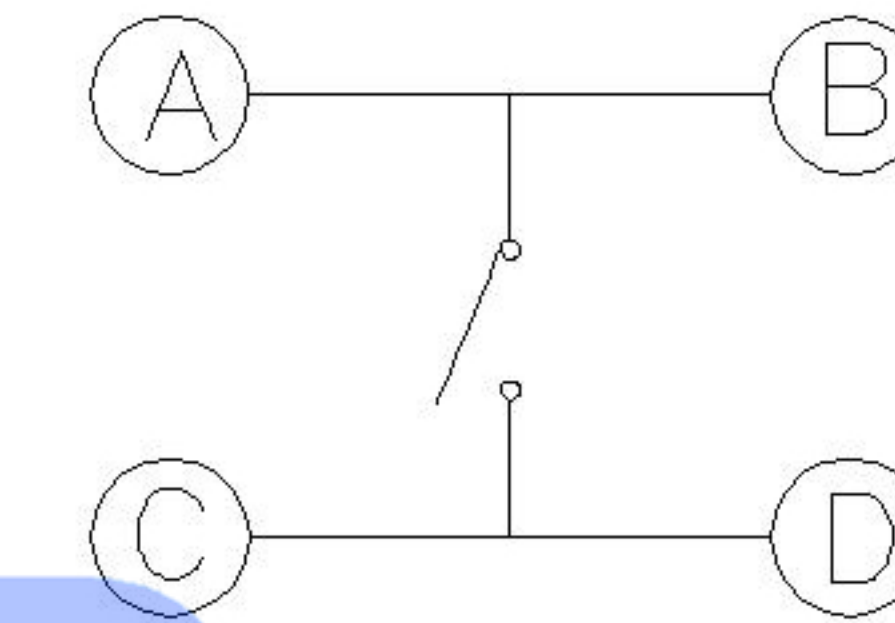

SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 50mA, 12V DC |
| Contact Resistance | 100mΩ max. |
| Insulation Resistance | 100MΩ min. 500V DC |
| Dielectric Strength | 250V AC/1 minute |
| Travel | 0.25 mm |
| Operating Temp. | -25°C ~ +70°C |
| Storage Temp. | -30°C ~ +80°C |

| Code-X | H |
|--------|------|
| A | 2.55 |
| B | 3.1 |
| C | 3.4 |
| D | 3.8 |
| E | 4.3 |

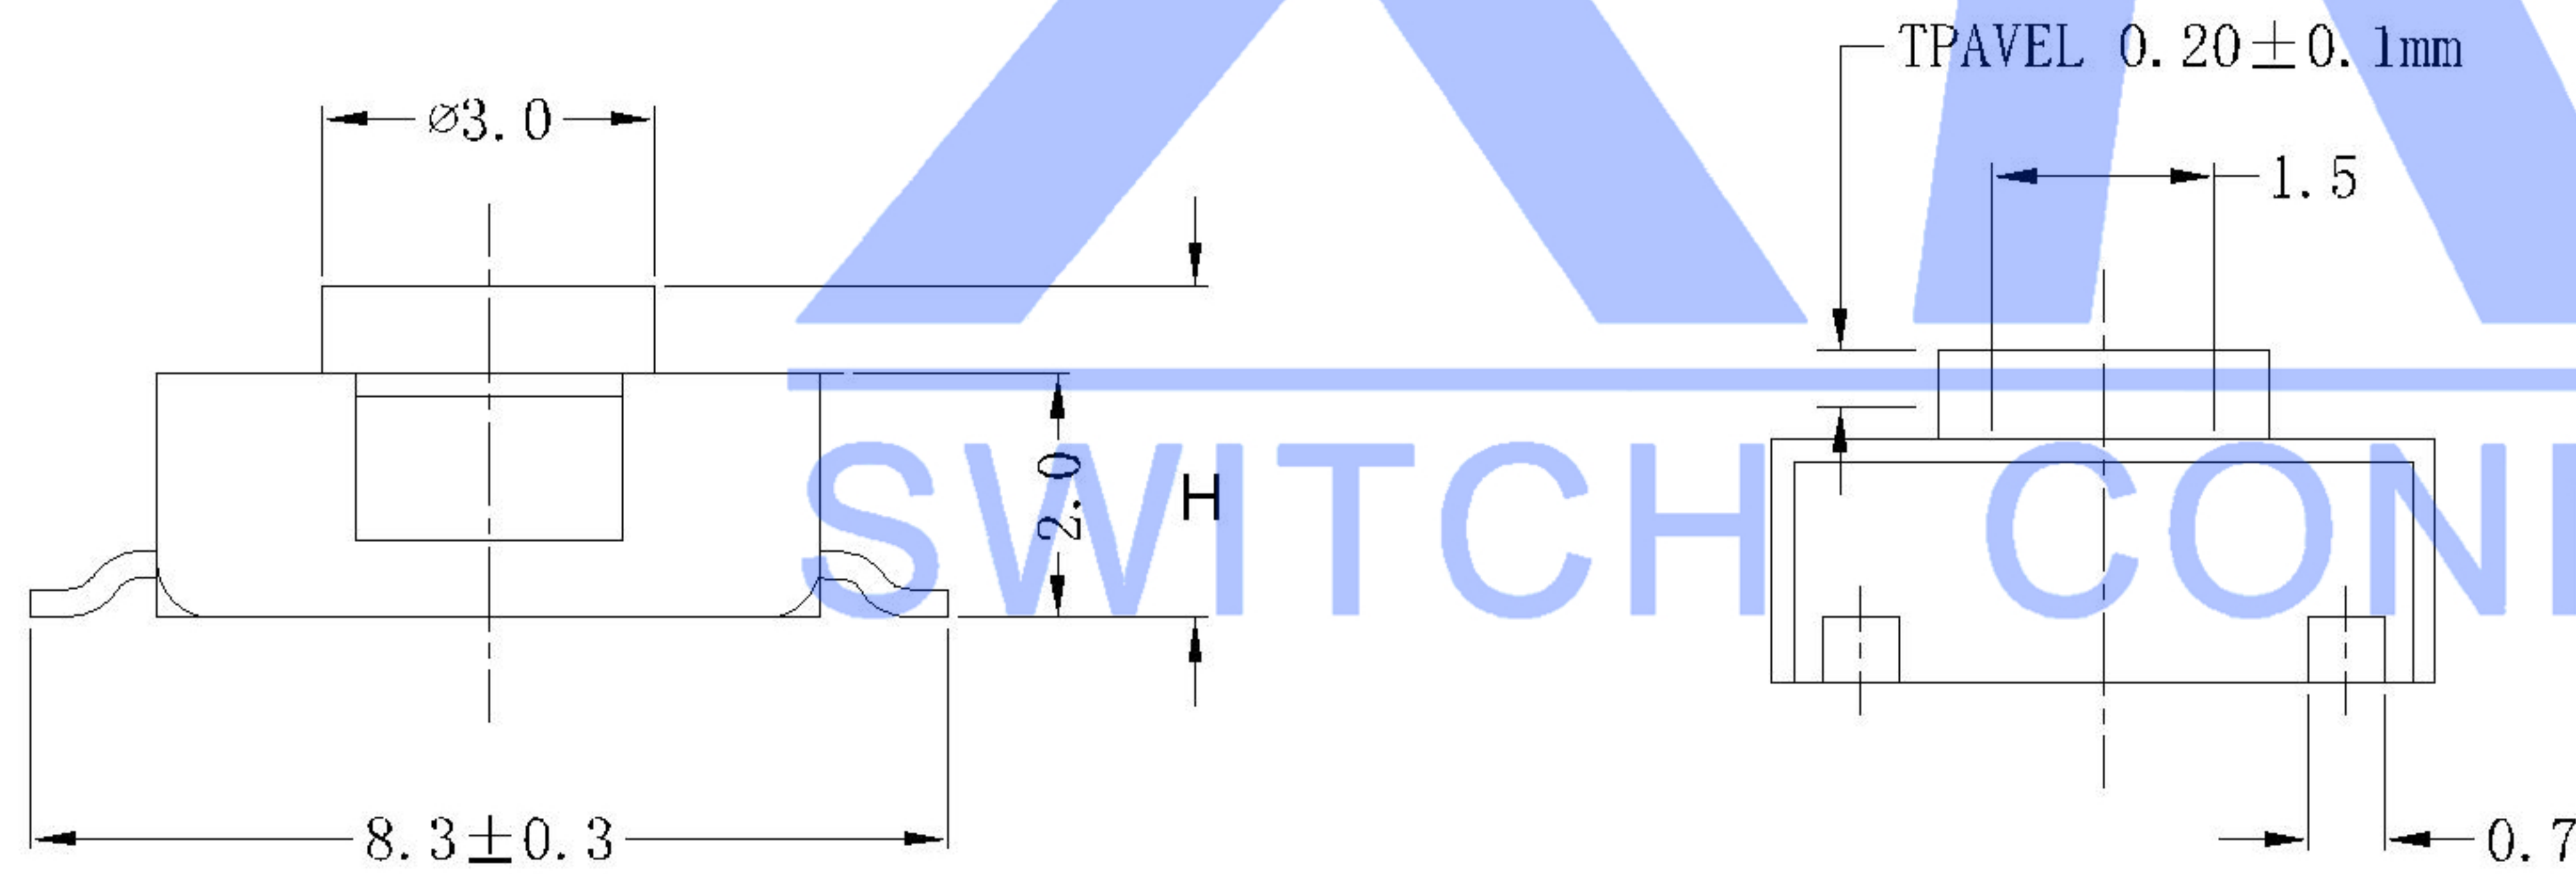

SWITCH CONNECTOR

| | |
|-----------------|----------------------------|
| PAPT NO | TS-1157-X-X |
| Operating Force | A: 100gf B: 160gf C: 260gf |
| Height | Code-X |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES | DSND | DATE | SCALE: N/A | MODEL TYPE: |
|------|-------------|------|---------|----------|------------------------|------|------|------------|----------------------|
| ΔX | | | | | ANGLAR ±5° | DWN | DATE | VIEW: | TACT SWITCH |
| ΔX | | | | | L ≤ 4 ±0.2 | CHKD | DATE | UNIT: mm | PART NO.: TS-1157 |
| ΔX | | | | | 4 < L ≤ 16 ±0.3 | APPD | DATE | SIZE: A4 | DWG NO.: TS-1157-X-X |
| MARK | | | | | 16 < L ≤ 63 ±0.4 | | | | WEIGHT 1.0g |
| | | | | | L > 63 ±0.5 | | | | SHEET 1/1 |
| | | | | | | | | | REVISION A0 |