

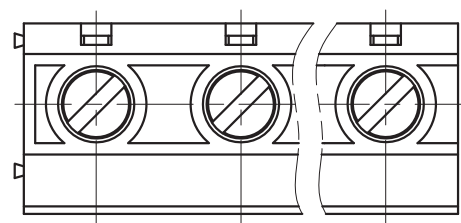
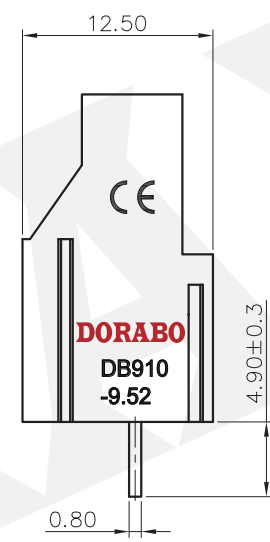


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

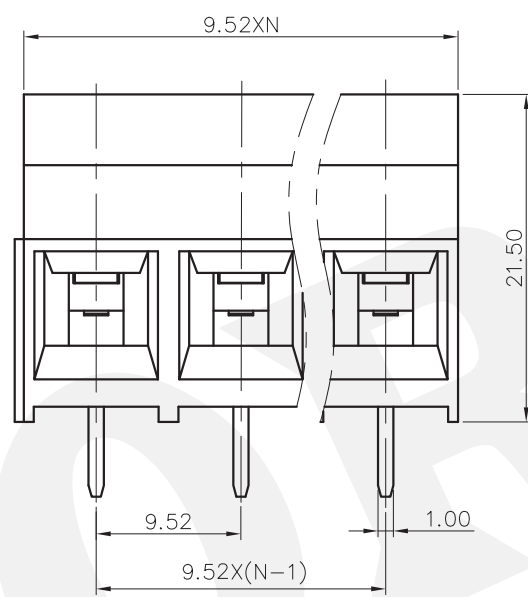

NOTES1:
 UL Standard
 1.Rated Voltage/Current : 300V / 30A
 2.Torque Value : M3 , 4.43Lb.in
 3.Wire Range : 26~10AWG
 IEC Standard
 1.Rated Voltage/Current : 750V / 26A
 2.Torque Value : M3 , 0.5N.m
 3.Wire Range : 1.5~4mm²

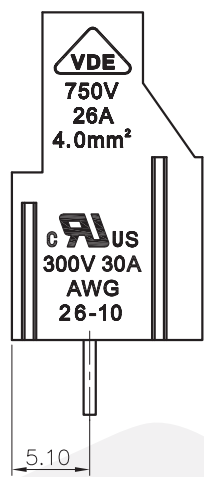


NOTES2:
 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 9.5mm, Poles : N=02~24P
 3.Stripping length : 8~9mm
 4.Withstanding Voltage : AC3000V/1Min.
 5.Operating temperature : -40°C~+105°C
 6.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				Tolerances		
TO	Over TO	TO	Over TO	TO	Over TO	0.1/10	±	
6	10	6	10	30	60	100	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2"

7.RoHS Compliance

DB910 - 9.52 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

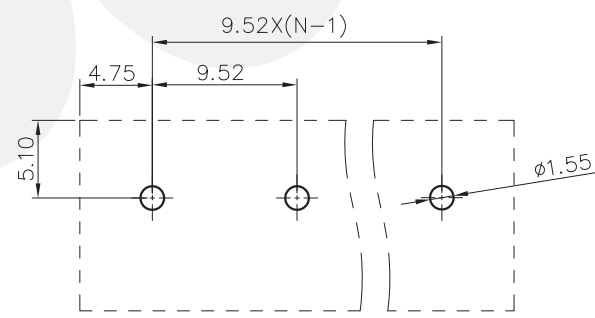

DETACHED LISTS	PART NO.:	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD:	NAME: DB910-9.52-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING		REV	DO
	DRFT:	DRAWING NO.:		SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1