

电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 8A 10A
 接触电阻/Contact resistance: 20mΩ
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical

温度范围/Temp.Range: -40° C~+105° C
 瞬间温度/MAX Soldering: +250° C, for 5 Sec


尺寸/Dimensions

间距/Pitch: 3.81mm/3.50mm
 极数/Poles: 2P-24P

材质及电镀/Material

螺母/Nut: M2.5 Brass
 焊针/Pin header: Brass, Tin plated
 塑件/Housing: PA66, UL94V-0

订购方式:
HOW TO ORDER

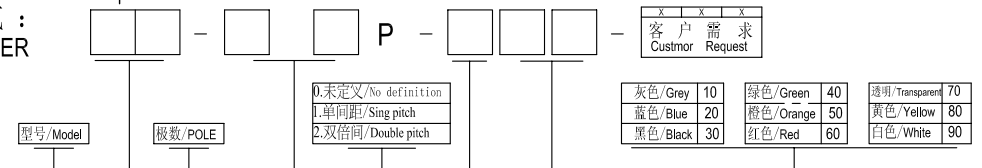

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	∠ short angle sid	≡	—	□	//	⊥				
	variable range	to	over 6	over 30	over 120									over 480	to	to	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	第一视角/FIRST ANGLE PROJECTION	
Cixi Dibo Electronics Co.,LTD					名称/NAME	DB2ERM-3.81/3.5-XXP