
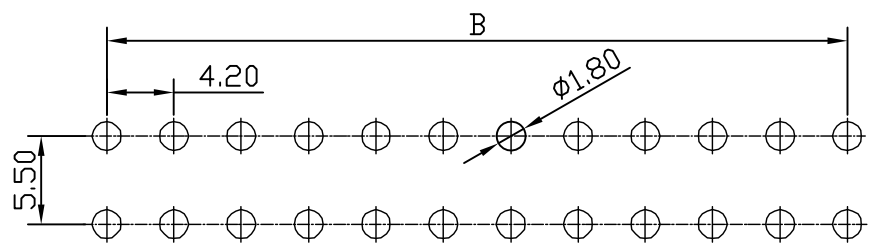
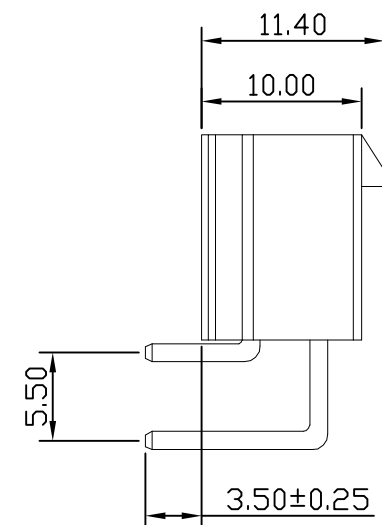
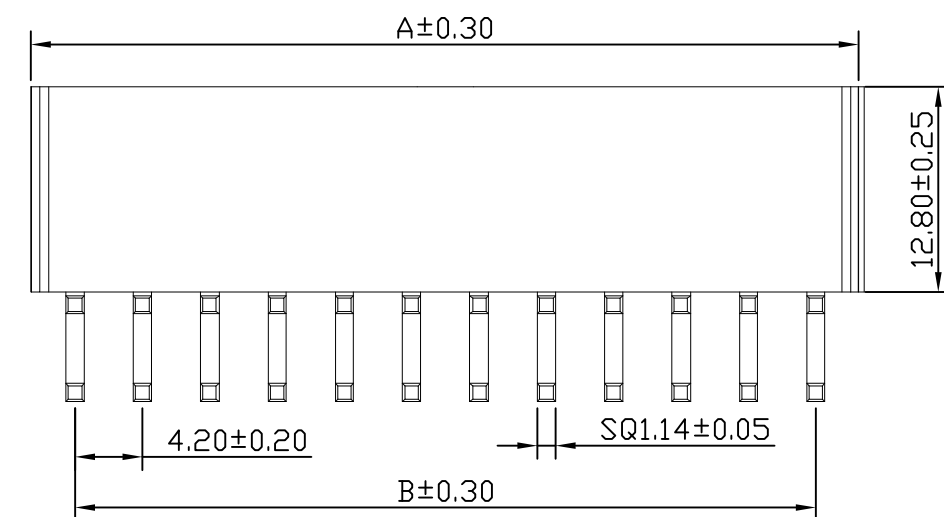


ROHS环保

说明

1. 额定电压: 250V AC/DC
2. 额定电流: 5A AC/DC
3. 接触电阻: 0.020Ω Max
4. 绝缘电阻: 1000MΩ Min
5. 使用温度: -55° C ~ +105° C
6. 塑胶材质: PA66
7. 端子材质: H65/镍底镀锡

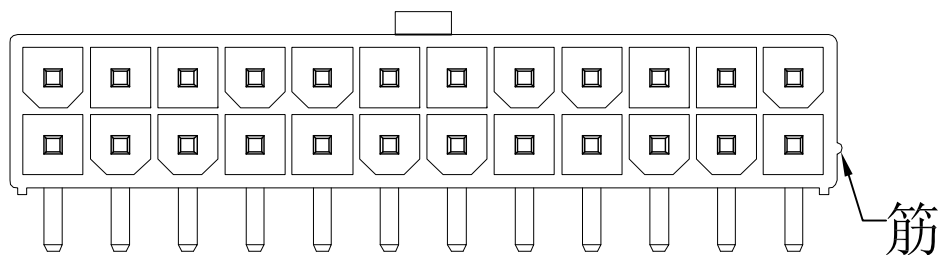

P.C.B LAYOUT

Contacts Per Row	Dimensions	
	A	B
2*2P	9.60	4.20
2*3P	13.80	8.40
2*4P	18.00	12.60
2*5P	22.20	16.80
2*6P	26.40	21.00
2*7P	30.60	25.20
2*8P	34.80	29.40
2*9P	39.00	33.60
2*10P	43.20	37.80
2*11P	47.40	42.00
2*12P	51.60	46.20

topt 深圳市鑫冠辉电子有限公司

一般公差 COMMONLY TOLERANCES	图号 DWG. NAME	成品图	绘图 PLOT	LBL	比例 SCALE	1:1
X. ±0.30	料号 PART NO.	ATX	审核 CHECKED	LIYAN	单位 UNIT	MM
XX ±0.25	品名 TITLE	ATX4.2 2XNP 90度 PC3.5 PA66	核准 APPROVED		版次 REV.	A.1
XXX ±0.20					页次 SHEET	01
ANGLE ±2'	THIRD ANGLE PROJECTION:		日期 DATE	2015-12-18	图幅 MAPS	A4

编号 DWG.NO.	XGH-DWG-A2110	标记 REV. LTR.	日期 DATE	更正加强筋方向 变更内容 REVISION NOTES	签名 SIGN	版次 REV.
			16.01.12		LXW	