


MAPX	MODIFICATION	DATE
------	--------------	------

NOTE:
 1. Material:
 Housing: Thermoplastics (U94V-0(ROHS-HP))
 Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
 Shell: COPPER ALLOY T=0.30mm
 2. FINISH:
 Contact: 15u" Gold Plated on Contact Area,
 80u" Min. Tin Plated on Solder Area
 50u" Min. Nickel Underplating Over All.
 Shell: 50u" Min. Nickel Underplating Over All.
 3. Specification:
 3.1: Rating:
 3.2: Rated voltage 500V AC/DC. Rated current: 2 A Max.
 3.2: Electrical:
 Insulation Resistance(EIA-364-21):
 1000MΩ Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-22):
 30 mΩ Max. at 20mV Max, 50mA
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, Flashover or breakdown at 500V/AC 1Minute
 4. Plug extraction force shall be between 1.0kgf and 2.00kgf
 5. Contact finish:
 01: Selective Gold Flash
 02: Selective Gold 3U"
 03: Selective Gold 5U"
 04: Selective Gold 15U"
 05: Selective Gold 30U"

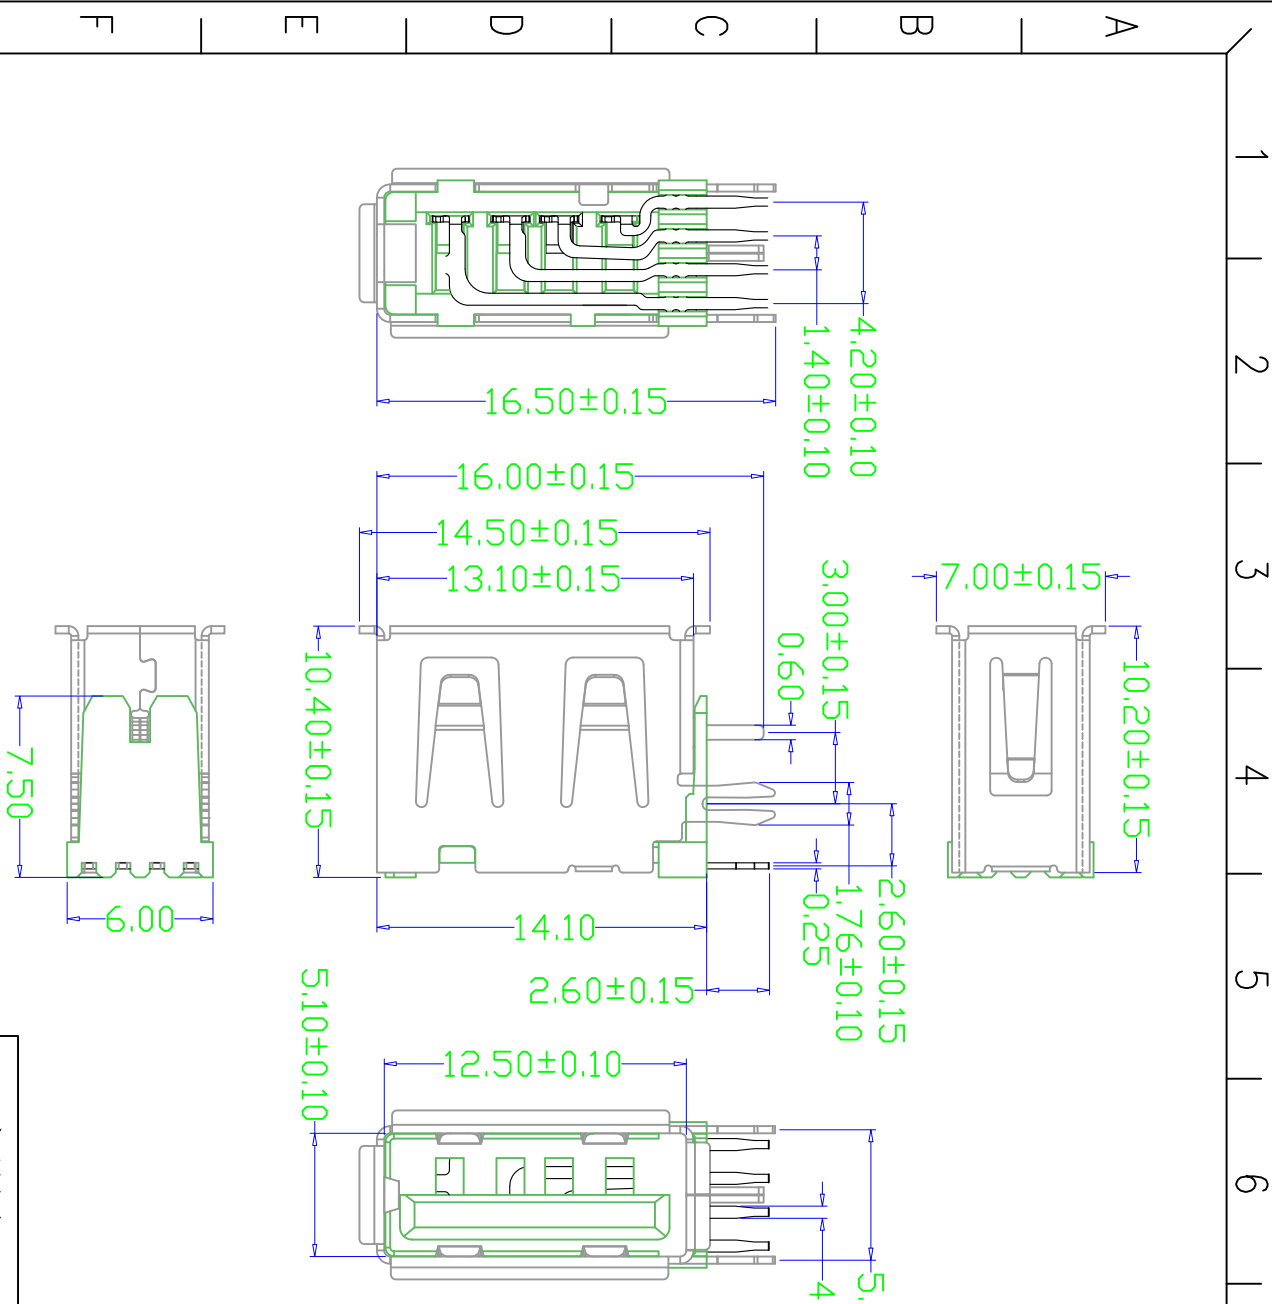

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCES: ±0.05

深圳市精拓金电子有限公司

产品图

PRODUCT CHART DMC

公差一览表
 TOLERANCE UNLESS OTHERWISE:

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

单位	MM	制图	Z-Y-B	制料号	
比例	1:1	审核		产品名称	USB A/F 侧插短体外壳(A款)
日期	2014.02.20	核准		角法	
		APPD		版本	A0

1 2 3 4 5 6 7 8 9 10

A B C D E F G