


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V
- Insulation Resistance:1000M Ω Min.
- Contact Resistance:30 M Ω Max.
- Dielectric Withstanding Voltage:500W
- Temperature Range:-55 $^{\circ}$ C to +85 $^{\circ}$ C
- Insulator color: Black/White
- Plastic material:PBT/LCP
- Shell finish:Nickel plated/Tin-Lead plate
- Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

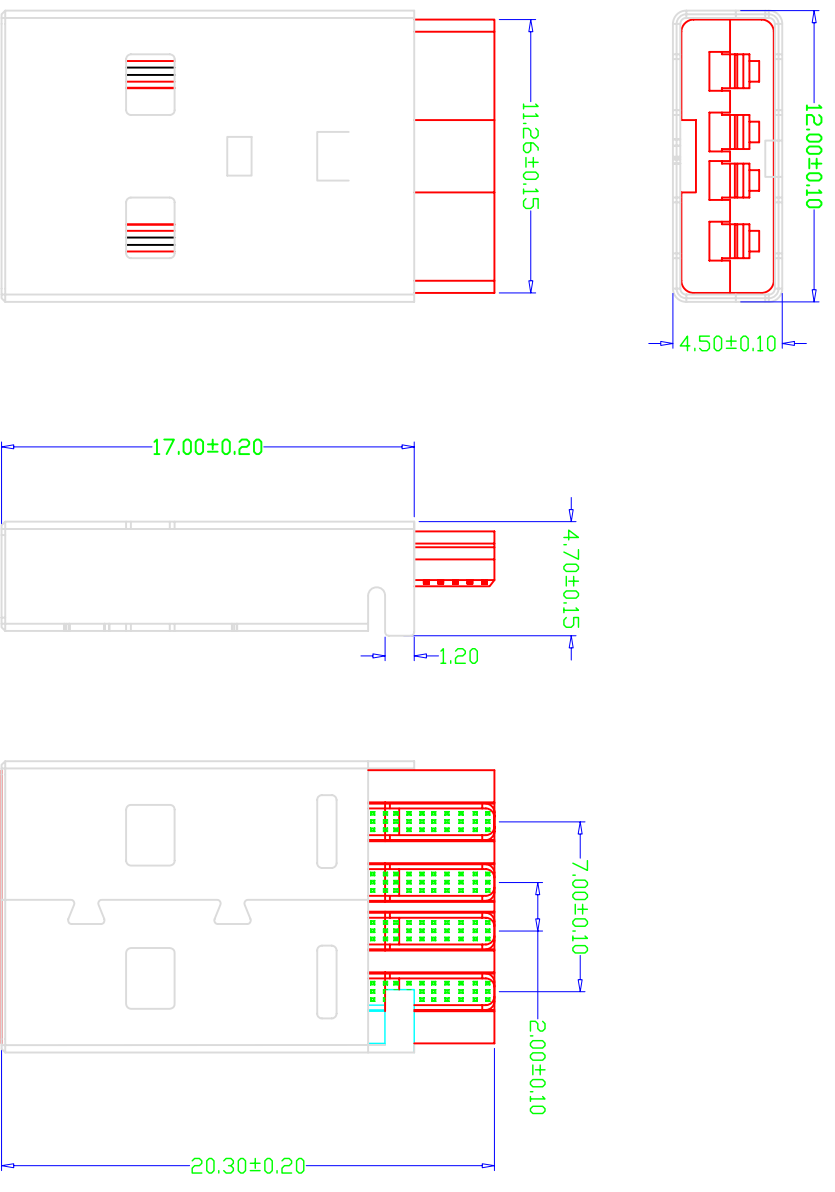

产品图
PRODUCT CHART DWG

公差一览表

TOLERANCE	UNLESS	OTHERWISE
X	±0.25	X ±5.°
X	±0.20	X ±2.°
.XX	±0.15	.XX ±1.°
.XXX	±0.10	.XXX ±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	Z-Y-B	制料号	
比例	1:1	审核		产品名称	USB A/M前壳17.0 (C款)
日期	2015.01.14	核准		产品编号	
DATE		APPR		角法	版本
				☉	VER
				☒	A0

1 2 3 4 5 6 7 8 9 10

A B C D E F G

G F E D C B A