

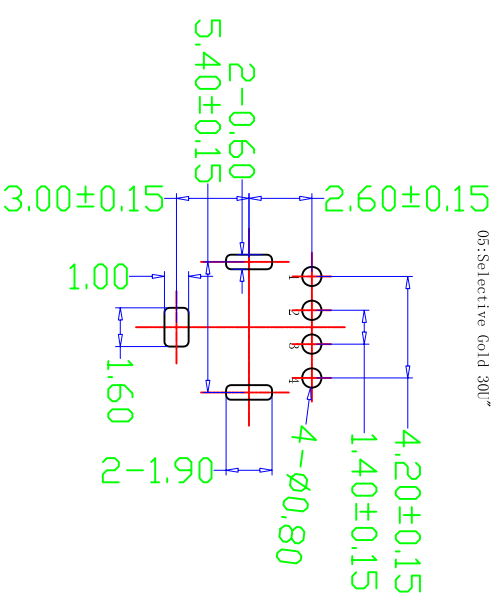
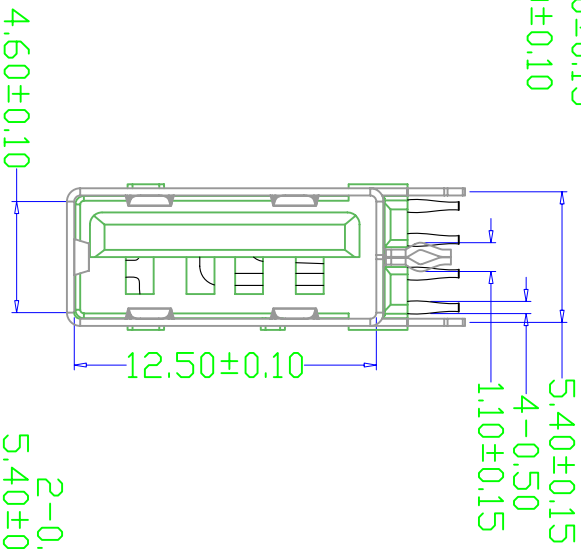
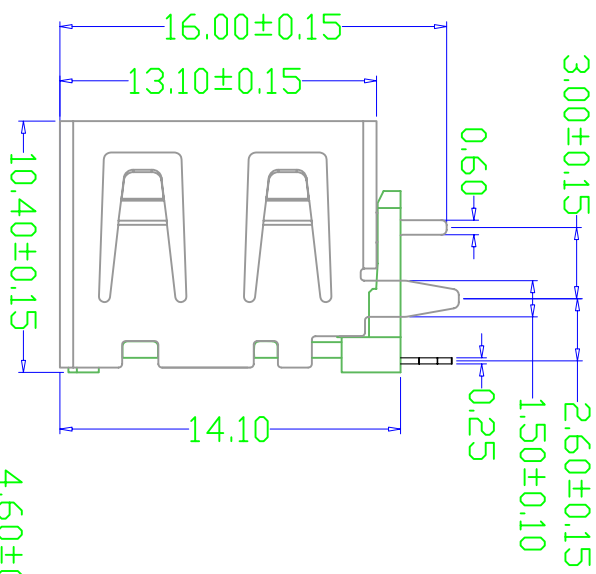
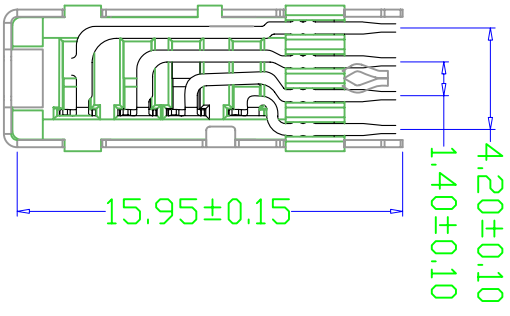


MAPX	MODIFICATION	DATE
------	--------------	------



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

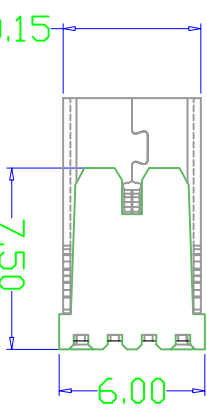

产品图

深圳市精拓金电子有限公司

公差一览表

公差	公差	公差	公差
X	±0.25	X	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

单位	MM	制图	Z-Y-B	制图料号	
比例	1:1	审核		产品名称	USB AFI 0.5插插短体外直内0型脚无过成品
日期	2014.07.20	核准		角法	版本
					A0

NOTE:

- Material: Housing: Thermoplastics (U94V-0(ROHS-HP))
Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
- FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min. Nickel Underplating Over All.
- Specification:
 - Rating:
 - Rated voltage 500V AC/DC. Rated current: 2 A Max.
 - Electrical:
 - Insulation Resistance(EIA-364-21): 1000MΩ Min. at 500V/DC for 1Minute.
 - Contact Resistance(EIA-364-23): 30 mΩ Max. at 20mV Max, 50mA
 - Dielectric Withstanding Voltage(EIA-364-20): No discharge, Flashover or breakdown at 500V/AC 1Minute
 - Plug extraction force shall be between 1.0kgf and 2.00kgf
 - Contact finish:
 - Selective Gold Flash
 - Selective Gold 3U"
 - Selective Gold 5U"
 - Selective Gold 15U"
 - Selective Gold 30U"