
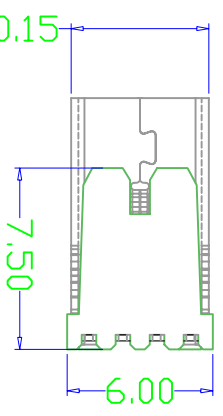
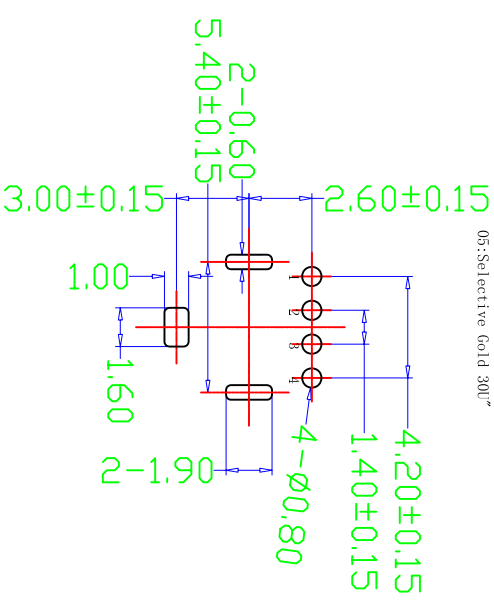
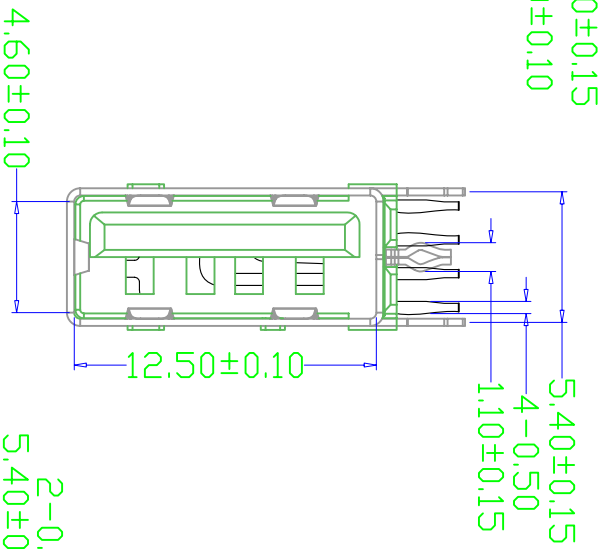
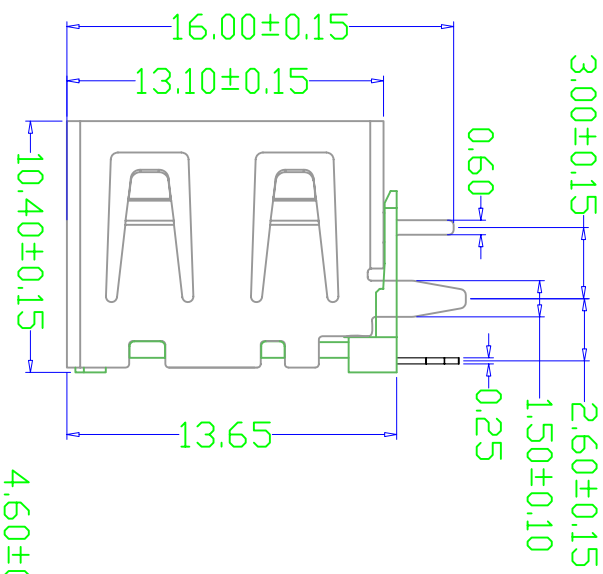
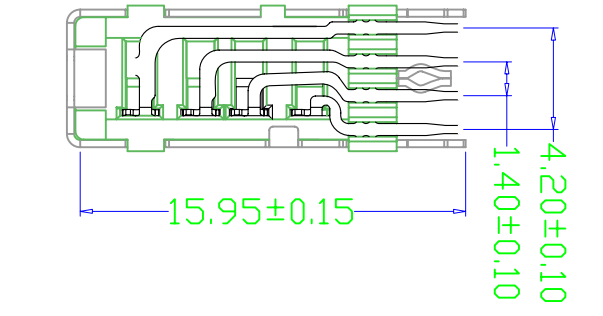


MAPX	MODIFICATION	DATE
------	--------------	------



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

- NOTE:
- Material:
Housing: Thermoplastics (U94V-0(ROHS-HP))
Contact: Phosphor Bronze C5191-2H/C2880-2H, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
 - FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min. Nickel Underplating Over All.
 - Specification:
 - Rating:
 - Rated voltage 500V AC/DC. Rated current: 2 A Max.
 - Electrical:
 - Insulation Resistance(EIA-364-21): 1000MΩ Min. at 500V/DC for 1Minute.
 - Contact Resistance(EIA-364-22): 30 mΩ Max. at 20mV Max, 50mA
 - Dielectric Withstanding Voltage(EIA-364-20): No discharge, Flashover or breakdown at 500V/AC 1Minute
 - Plug extraction force shall be between 1.0kgf and 2.00kgf
 - Contact finish:
 - Selective Gold Flash
 - Selective Gold 3U"
 - Selective Gold 5U"
 - Selective Gold 15U"
 - Selective Gold 30U"

产品图

深圳市精拓金电子有限公司

PRODUCT CHART DIM

公差一览表		公差一览表	
TOLERANCE UNLESS OTHERWISE:			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

单位	MM	制图	Z-Y-B	制图料号
UNITS		DRAWING		PRODUCT PART NO.
比例	1:1	审核		产品名称
SCALE		CHKO		PRODUCT NO.
日期	2014.07.20	核准		角法
DATE		APPD		VIEW

版本	A0
VER	