

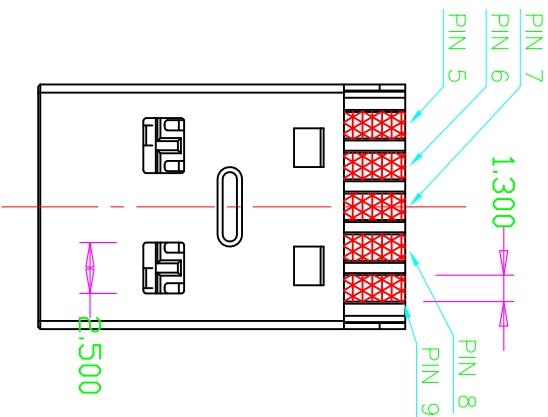
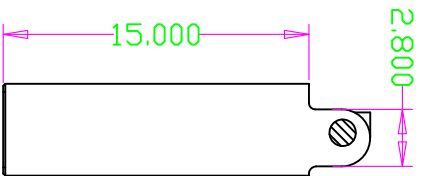
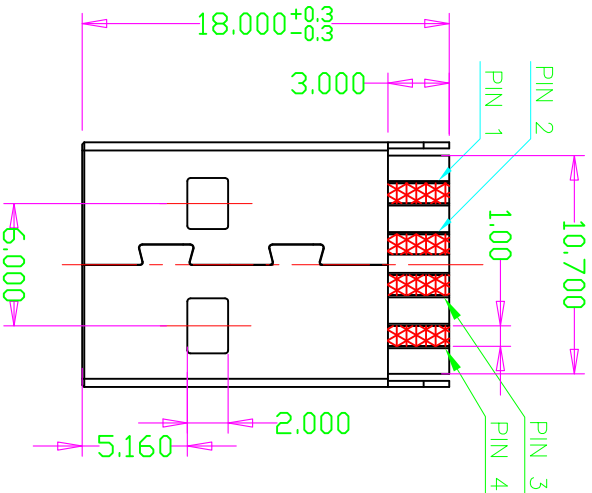


RoHS

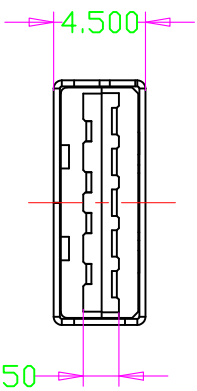

MAPX	MODIFICATION	DRW	DATE

USB-A-M SOLDER TAIL (焊线式)

特性: Specifications

电器 Electrical:

接触阻抗: Contact Resistance

30mOhms MAX

耐电压: Dielectric Withstanding Voltage

50V AC AT sea Level

绝缘阻抗: Insulation Resistance:

100MΩCA ohms MIN

材料: Material:

塑胶: Housing: Thermoplastics, PBT料蓝色塑胶

端子: Contact: Copper Alloy 铜合金

铁壳: Shell: SPCC-SD 铁材

电镀: Finish:

端子: Contact: Plated Gold in Contact Area:

Tin on Solder Tails

接触点镀金, 脚镀锡

铁壳: Shell:

Nickel Plating All Over 镀镍

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X	±0.25	X	±5.°
X	±0.20	X	±2.°
XX	±0.15	XX	±1.°
XXX	±0.10	XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHKD	核准 APPD	制图料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	制法 VIEW	版本 VER
MM	1:1	2016-09-09	许榕强	郭治富	黄国荣		USB 3.0 A TYPE PLUG		AO

G

F

由 Autodesk 教育版产品制作

B

A

1 2 3 4 5 6 7 8 9 10

G

F

由 Autodesk 教育版产品制作

B

A