

MAPX	MODIFICATION	DATE
------	--------------	------







Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f. UL94v-0
- 1.2 Contact: copper alloy, t=0.15mm
- 1.3 Shell: copper alloy, t=0.30mm

2. Specification:

- 2.1 Current rating: 1.5PIN 3A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

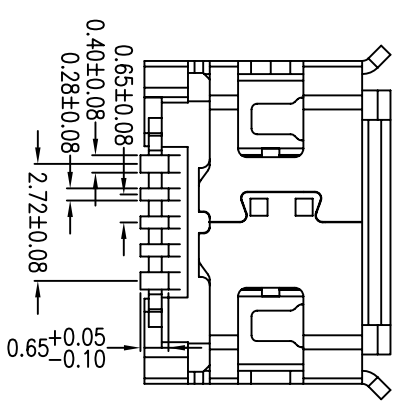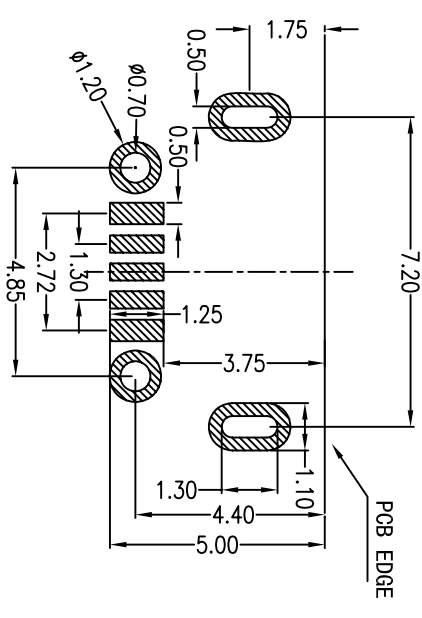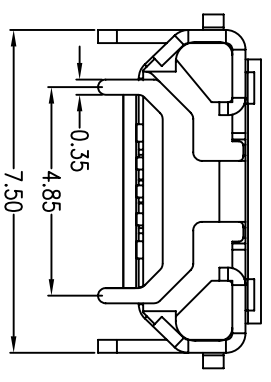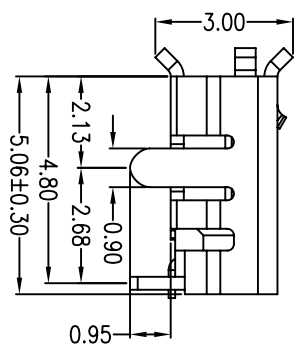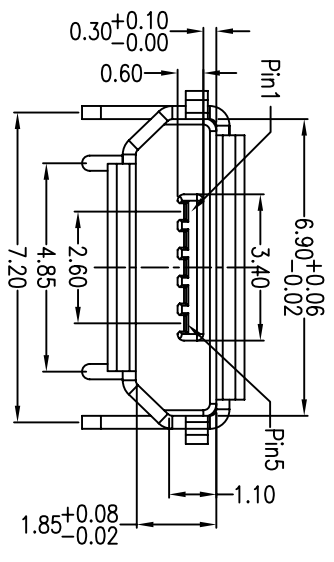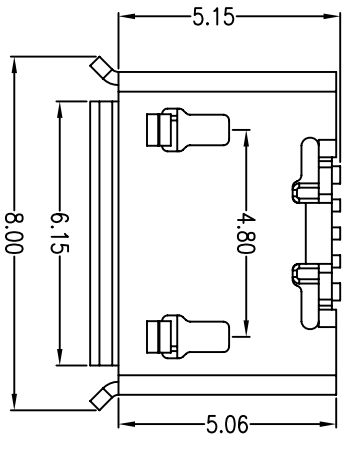

# 产品图

## 公差一览表

### PRODUCT CHART DWG

# 深圳市精拓金电子有限公司

TOLERANCE UNLESS OTHERWISE	公差	UNIT	MM	DRAWING	制图料号
X. ±0.35	X.	±5°		审核	产品名称
X. ±0.30	X.	±2°	1:1	审核	产品型号
XX ±0.20	XX	±1°		核准	图例
XXX ±0.10	XXX	±0.5°		核准	角法

DATE	2015-10-19	APPRO	黄国荣	版本	AD
------	------------	-------	-----	----	----

1 2 3 4 5 6 7 8 9 10

G F E D C B A

G F E D C B A