


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:
 1. HOUSING: SEE NOTES, TERMINAL: SEE NOTES, SHELL: SEE NOTES.

SPECIFICATION:
 1. ELECTRICAL CHARACTERISTIC:
 CONTACT RESISTANCE: 30MΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 INSULATION RESISTANCE: 1000MΩ MIN
 2. MECHANICAL CHARACTERISTIC:
 INSERTION FORCE: 35N(3.57KG) MAX
 EXTRACTON FORCE: 10~35N(1.02~3.57KG) MIN
 DURABILITY: 1500 CYCLES EXTRACTON FORCE: 10~35N
 5000 CYCLES MIN
 5000 CYCLES EXTRACTON FORCE: 3~35N

3. ENVIRONMENTAL:
 OPERATING TEMPERATURE: -55°C+85°C

4. Contact finish:
 01: Selective Gold Flash
 02: Selective Gold 3U"
 03: Selective Gold 5U"
 04: Selective Gold 15U"
 05: Selective Gold 30U"

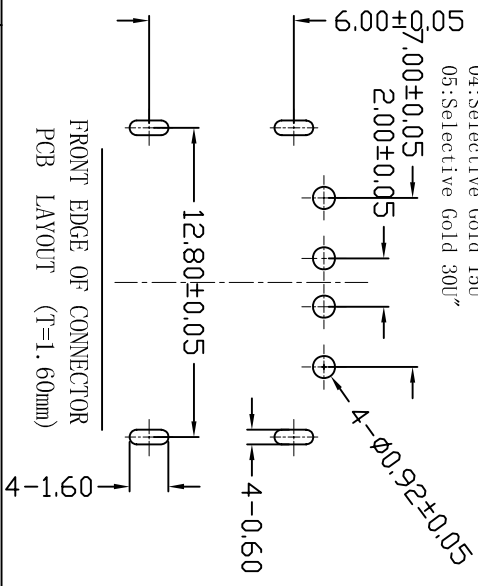

深圳市精拓金电子有限公司

PRODUCT CHART DWG		制图料号		JTJ-USB-10.0-003	
公差一览表		UNIT	MM	DRAWING	Z-Y-B
TOLERANCE UNLESS OTHERWISE		UNITS	MM	DRAWING	Z-Y-B
X ±0.15	X ±5°	SCALE	1:1	审核	产品名称
X ±0.10	X ±2°	DATE	2012.09.24	核准	USB A/F 10.0无边四脚鱼叉(方弹)
XX ±0.05	XX ±1°	DATE	2012.09.24	核准	角法
XXX ±0.03	XXX ±0.5°	DATE	2012.09.24	核准	版本
		DATE	2012.09.24	核准	VER
		DATE	2012.09.24	核准	AD